

A Contribution to the Monitoring of Ceramic Surface Quality Using a Low-Cost Piezoelectric Transducer in the Grinding Operation [†]

Martin Aulestia Viera ^{1,*}, Felipe Alexandre ¹, Wenderson Lopes ¹, Paulo de Aguiar ¹, Rosemar Batista da Silva ², Doriana D'addona ³, Andre Andreoli ¹, Eduardo Bianchi ⁴

¹ Department of Electrical Engineering, UNESP, Av. Eng. Luiz E. C. Coube, 14-01, Bauru, SP 17033-360, Brazil; felipe.alexandre@feb.unesp.br (F.A.A.), wendersonmanin@gmail.com (W.N.L.), aguiarpr@feb.unesp.br (P.R.d.A.), andreoli@feb.unesp.br (A.L.A.)

² School of Mechanical Engineering, Federal University of Uberlandia; rosemar.silva@ufu.br (R.B.d.S)

³ Fraunhofer Joint Laboratory of Excellence on Advanced Production Technology (Fh-J_LEAPT Naples) Dept. of Chemical, Material and Industrial Production Engineering, University of Naples Federico II, Piazzale Tecchio 80, 80125 Naples, Italy; daddona@unina.it (D. D.)

⁴ Department of Mechanical Engineering, UNESP, Av. Eng. Luiz E. C. Coube, 14-01, Bauru, SP 17033-360, Brazil; bianchi@feb.unesp.br; bianchi@feb.unesp.br (E.B.)

* Correspondence: aulestia.martin16@gmail.com; Tel.: +55-014-99795-4453

[†] Presented at the 5th International Electronic Conference on Sensors and Applications, 15–30 November 2018; Available online: <https://sciforum.net/conference/ecsa-5>.

Received: date; Accepted: date; Published: date

Abstract: The grinding process is usually one of the last stages in the manufacturing process chain since it can provide superior surface finish and closer dimensional tolerances. However, due to peculiarities of the grinding process, workpiece material is susceptible to many problems, what demands a reliable real-time monitoring system. Some grinding monitoring systems have been proposed by means of sensors. However, literature is still scarce in terms of employing time-frequency analysis techniques during grinding of ceramics. Thus, this paper proposes an application of the low-cost piezoelectric transducer (PZT) in the analysis of the surface quality of ceramic workpieces during grinding process by means of frequency-time domain technique along with the ratio of power parameter (ROP). An integrated high-cost commonly used acoustic emission (AE) sensor was employed in order to compare the results with the low-cost PZT transducer. Tests were performed using a surface grinding machine. Three values of depth of cut were selected in order to represent slight, moderate and severe grinding conditions. Signals were collected at 2 MHz. The short-time Fourier transform (STFT) was studied in order to obtain the frequency variations over time. An analysis of the ratio of power (ROP) values was performed in order to establish a correlation with the surface roughness. The ROP values are highly desirable for setting a threshold to detect the workpiece surface quality and implementing into a monitoring system. The results using the PZT transducer showed a great similarity to those obtained by using the AE sensor.

Keywords: piezoelectric transducer; monitoring; grinding; ceramic; digital signal processing

1. Introduction

Grinding is considered one of most important steps in machining process of advanced ceramics, as it gives to the workpiece more accurate dimensional control and excellent finishing [1]. However, the grinding operation contains many variables that must be considered in order to guarantee its efficiency, such as the contact of the grinding wheel abrasive grits with workpiece surface, grinding forces, machining environment, specific energy and grinding speed adjustment.

Advanced ceramics have been widely used in manufacture of components with complex requirements, in which high performance materials are required due to their excellent properties, such as: high temperature resistance, low thermal expansion coefficient, chemical stability and wear endurance [2]. Because of advanced ceramics, such as aluminum oxide, silicon nitride, zirconia and alumina have high hardness and friability, they pose as challengers when subjected to manufacturing processes, especially to grinding [3].

Monitoring of the ceramic grinding process aims the better control of the component quality, among others, since it is a process to provide combination between superior finish and tight dimensional tolerances as main requirements. According to Ma *et al.* [4], surface roughness is the main output parameter employed to evaluate a quality of a machined component. However, this direct method of measuring, besides its destructive characteristic, requires process interruption, so excessive time-consuming to be performed. Because of these drawbacks, indirect monitoring of surface quality, even to estimate surface quality, is welcome and can bring benefits. Indirect methods are based on signal processing of sensors related to the variable of interest. These methods are most desirable since they enable real-time process analysis. The study of the wear of the grinding wheel during the ceramic grinding process was proposed by Nakai *et al* [1] using acoustic emission and power sensors together in application of artificial neural networks.

According to Baptista *et al* [5], piezoelectric transducers have been used in the last decades in order to detect structural damages by means of signs related to piezoelectric effect. This type of transducer have large importance in many areas of process monitoring. The most commonly used piezoelectric transducers are the PZT (Lead Zirconate Titanate) and MFC (Macro-Fiber Composite) ceramics, which have thickness of some tenths of a millimeter. The signals from PZT sensors provides several information about the process they are monitoring. The estimation of the roughness during steel grinding process was proposed by Ribeiro *et al* [6] using low cost piezoelectric diaphragms.

This work proposes the application of low cost piezoelectric transducer in the analysis of surface quality of ceramic components during the grinding process. Time-frequency techniques, together with ratio of power (ROP) parameter were used, what represents a novel approach for manufacturing field, since there was not noticed any published work in this topic until the moment of writing of such paper. In order to verify the application of this technique, an EA sensor, consolidated in monitoring of manufacturing processes was used. It is worth mentioning that the monitoring of the ceramic grinding process with low-cost piezoelectric transducers was not found in literature.

2. Signal Processing

An alternative approach in frequency-domain analysis is the Short-Time Fourier Transform (STFT). This alternative consists in segmenting a time interval into short window subsequences, spaced by a uniform time interval, and its Discrete Fourier Transform (DFT) calculated separately. With this method is possible to perform a more detailed analysis of frequency spectrum [7]. The result obtained is a two-dimensional representation of the signal in time and frequency. The time-frequency resolution can be adjusted by changing the window size. One of the parameters that analyzes the frequency spectrum of acoustic emission signals is the Ratio of Power (ROP). This parameter addresses the power ratio of a given frequency band with the total power of the analyzed spectrum [8], being defined in Equation (1).

$$ROP = \frac{\sum_{k=n_1}^{n_2} |x_k|^2}{\sum_{k=0}^{N-1} |x_k|^2} \quad (1)$$

From Equation 1, the denominator eliminates the local effect of power, where N is the block data size; n_1 and n_2 define de frequency range for analysis and x_k is the k th discrete Fourier transform (DFT).

3. Materials and Methods

3.1. Experimental Setup and Data Acquisition

Three ceramic alumina workpieces with 35 mm length x 8 mm width and Vickers microhardness of 1339 ± 47 HV1 (JIS R1610-1991 standard) were machined in a peripheral surface grinding machine, RAPH 1055 model, from Sulmecanica. A resin-bond diamond grinding wheel with designation SD126MN50B2 from Dinser, external diameter of 350 mm and wheel width of 15.5 mm was used in the tests. All tests consisted of a single grinding pass across the workpiece surface at different cutting conditions: cutting speed of 33 m/s; worktable speed of 58 mm/s. Three radial depth of cut values were tested: 25 μm , 105 μm and 350 μm , representing a slight, medium and severe grinding conditions. Prior to each test, a conglomerate type dresser was used to dress the grinding wheel to guarantee its best grinding performance. Each test was performed in presence of a coolant (water-oil emulsion of 4%) at a flow rate of 27.5 l/min and pressure of 1 MPa.

A low-cost PZT transducer, 7BB-35-3 model, from Murata Electronics North America and an AE sensor, equipped with a processing signal unit, from Sensis, DM-42 model, was employed in the tests. As shown in [9], this piezoelectric transducer has similar properties to conventional PZT ceramics and is sensitive to damage. Both sensors were attached to the workpiece holder and properly calibrated for good signal sensitivity and saturation. An oscilloscope, DL850 model, from Yokogawa manufacturer, collected the PZT and AE raw signals at a sampling rate of 2 MHz.

3.2. Workpiece Surface Assessment

After the grinding tests, the surface quality of the workpieces was evaluated in terms of surface roughness (*Ra parameter*) using a Taylor Hobson Surtronic 3+ portable stylus instrument. A sampling length of 0.8 mm and a cut-off of 0.25 mm were used. Each workpiece ground length was equally divided into five regions and three roughness measurements were taken from each region. The mean value was calculated for each workpiece, allowing the assessment of the ground workpiece. In addition to measuring surface roughness, all the workpieces were subjected to microscopical analysis in order to evaluate the subsurface integrity. The confocal microscopy measurements were taken using a DCM three-dimensional (3D) confocal microscope manufactured by LEICA, with 800x magnification.

3.3. Signal Processing

The data sets from the tests were digitally processed in MATLAB. According to Ribeiro *et al* [10], the frequency response of the two sensors (AE and PZT) varies from 2 kHz to 400 kHz. Thus, in order to reduce the amount of data to be processed and respecting the Nyquist sampling theorem, the samples were resampled at a rate of 1 MHz. Before the resampling, a digital filter (2 KHz to 400 KHz) was applied with the aim of avoiding the aliasing effect and eliminating noise. The STFT of each test was then calculated using a rectangular window 5,000 points in length and 90% overlap. Thus, a time-frequency resolution of 5 ms and 400 Hz, respectively, was obtained.

A frequency band was chosen for each sensor. The absolute value of STFT was considered for the choice of frequency bands. Thus, the criterion used in the selection of frequency bands was based on the search for frequency intervals that present a similar value over time and differences in magnitude (color bar) related to the conditions of the process (slight, medium and severe). The absolute STFT values and the time-frequency resolution were used to compute the ROP parameter, applied in the chosen frequency bands.

4. Results and Discussion

The results obtained from the characterization of the ground ceramic workpieces are presented in this section. The surface roughness (*Ra*) results measured using a confocal microscope are shown in Fig. 1. From this Figure, it can be seen that the signals generated by both sensors and its correlation with the workpiece surface roughness are obtained through frequency-time analysis, band selection and ROP parameter analysis. The results are shown in Table 1 and Fig. 2. The confocal analysis was performed for each radial depth of cut in order to detect micro-defects on the workpiece surface. It can be seen that, when ceramic was machined at the slight condition, no significant surface grinding

alteration was detected. However, some peculiar irregularities of previous processes can be observed in Fig. 1a.

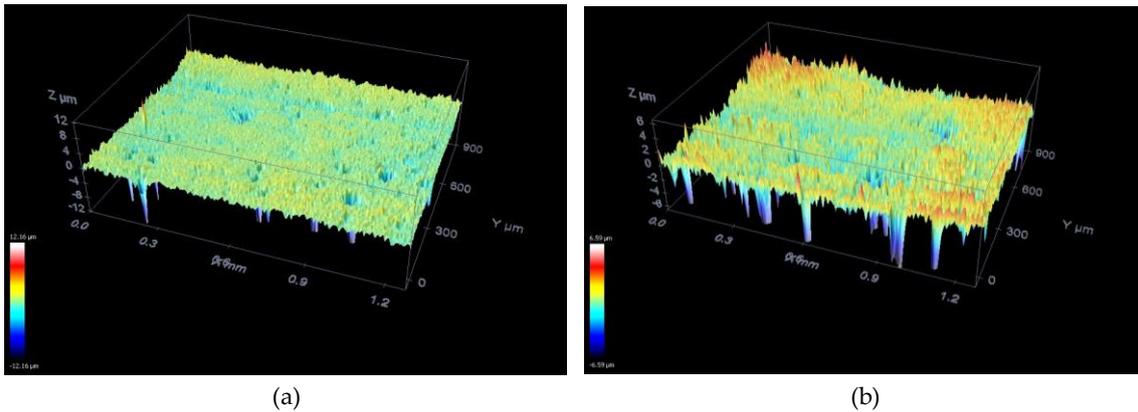


Figure 1. Confocal microscopy, (a) 25 μm and (b) 350 μm.

As the depth of cut increases, the severity of the grinding process also increases, thereby worsening the component surface quality. The most significant effect can be observed in Fig. 1b, corresponding to the workpiece surface ground at a 350 μm depth of cut. An increase in the material removal rate leads to a decrease in surface quality, increasing the number of surface cracks. The irregularities and color differences on the graphs of Fig. 1 are related to the proximity of the formed valleys. The 3D images clearly indicate the increasing peak-to-valley distance, i.e. greater surface roughness.

Table 1. STFT spectrograms.

Depth of Cut	Acoustic Emission Sensor (AE)	Piezoelectric Transducer (PZT)
25 μm		
350 μm		

The mean roughness values, measured by the portable stylus instrument, for the slight, medium and severe grinding conditions were 0.5156 μm, 0.6844 μm and 0.7933 μm, respectively. As expected,

the mean roughness values increase with process severity. These results are in agreement with those obtained in Fig. 1. Furthermore, the surface roughness values are within an acceptable range for the grinding process, with a maximum value of 1.6 μm for steel, according to [11]. In advanced ceramic grinding, roughness values lower than 1 μm are usually expected.

The STFT spectrograms of both sensors (AE and PZT), for the slight and severe grinding conditions, are shown in Table 1. Magnitude variations in the spectrum frequencies that represents the lowest depth of cut (25 μm) are observed. This variation is related to the contact between the workpiece surface and abrasive grits of the grinding wheel, which follows a non-uniform behavior since many of the abrasive grits do not have contact with the workpiece surface, generating low energy levels on graphs. Thus, little acoustic activity is generated, directly reflecting in the harmonic content of the signal sampled during the process. On the other hand, the spectrogram that represents a severe grinding process (350 μm) presents a uniform harmonic content over time. This is caused by the continuous contact of the abrasive grits and the workpiece surface, generating greater acoustic activity. In both grinding conditions can be observed that the characteristic frequencies are distributed continuously over time, however, for the severest grinding condition, the harmonic content assumes higher magnitude levels.

The frequency bands chosen for the computation of the ROP parameter were (138-143) kHz for the AE sensor and (142-147) kHz for the PZT transducer. The two frequency bands presented characteristics related to the process conditions. The ROP results for both sensors are shown in Fig. 2. It can be clearly seen that as the depth of cut increases, there is an increase of the ROP values, i.g, ROP parameter is proportional to the variation in of radial depth of cut in grinding. This is due to the chip accumulation in the cutting region, resulting in increased cutting force and, consequently, greater acoustic emission activity and surface roughness. Therefore, machining ceramic with diamond abrasive wheel at depth of cut of 350 μm generated the highest ROP, STFT and Ra values.

From results in Table 1 and Fig. 2 can be seen an increase in energy at the beginning and end of the grinding process. This is a typical grinding behavior, since it represents the first contact of the grinding wheel abrasive grits with the workpiece, as well as the last contact, respectively. The grinding contact area was smaller at the beginning and also at the end of the machining process. This characteristic of the process slightly increases the surface roughness values at the ends of the machined workpiece, as can be seen in Fig. 1, from 0.0 to 0.2 and 1.0 to 1.2 in x-axis, where a change in color representing a greater roughness value, which is highly perceptible. In the middle of the workpiece surface, the surface roughness presented almost constant values, all the surface changes are clearer in the severe grinding condition. The frequency bands chosen presented amplitudes related to the workpiece surface condition, in both cases a minimum of overlap between the process conditions can be observed.

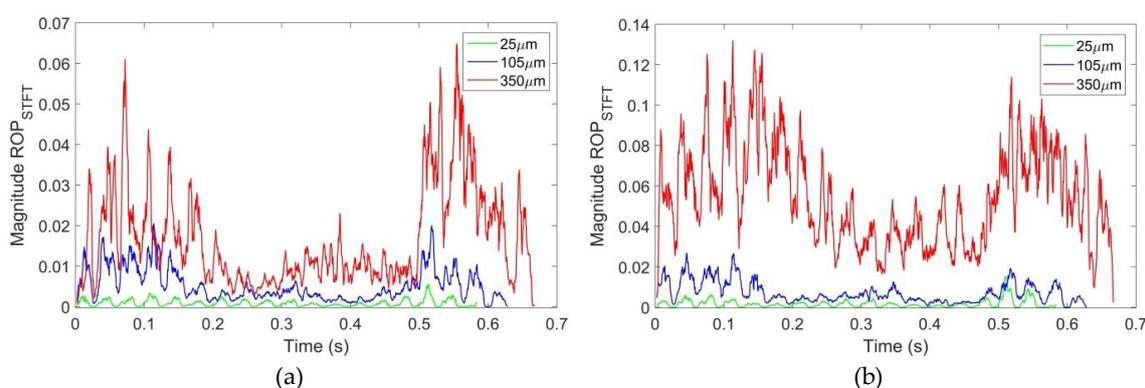


Figure 2. ROP of the (a) AE sensor and (b) PZT transducer.

5. Conclusions

The following conclusions can be drawn from this work on grinding of ceramic with diamond abrasive wheel:

- Both surface roughness values and acoustic signals increased with radial depth of cut;

- Surface irregularities were pronounced when machining in more severe grinding conditions;
- The increase in surface roughness was directly proportional to the increase of ROP values, and concomitantly with the increase of the aggressiveness of the process;
- Both sensors (AE and PZT) responded satisfactorily to the process stimuli;
- The results demonstrated the reliability of the proposed method for the machining conditions tested, which can be extended to other materials and grinding conditions.

Author Contributions: The authors contributed equally to this work.

Funding: This research was funded by São Paulo Research Foundation (FAPESP), grant number #2018/07292-0 and #2017/18148-5.

Acknowledgments: This work was supported in part by the São Paulo Research Foundation (FAPESP) (grants #2018/07292-0 and #2017/18148-5) and Capes Foundation, Ministry of Education of Brazil.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Nakai, M. E.; Aguiar, P. R.; Guillard, H.; Bianchi, E. C.; Spatti, D. H.; D'Addona, D. M. Evaluation of neural models applied to the estimation of tool wear in the grinding of advanced ceramics. *Expert Syst. Appl.* **2015**, *42*, 7026–7035.
2. Jiang, S.; Li, T.; Tan, Y. A DEM methodology for simulating the grinding process of SiC ceramics. In *Procedia Engineering*; 2015; Vol. 102, pp. 1803–1810.
3. Chang, C. W.; Kuo, C. P. An investigation of laser-assisted machining of Al₂O₃ ceramics planing. *Int. J. Mach. Tools Manuf.* **2007**, *47*, 452–461.
4. Ma, L.; Gong, Y.; Chen, X. Study on surface roughness model and surface forming mechanism of ceramics in quick point grinding. *Int. J. Mach. Tools Manuf.* **2014**, *77*, 82–92.
5. Baptista, F. G.; Filho, J. V. Piezoelectric Transducers Applied in Structural Health Monitoring: Data Acquisition and Virtual Instrumentation for Electromechanical Impedance Technique. *Farzad Ebrahimi. (Org.). Adv. Piezoelectric Transducers.* **2011**, *1*, 105–128.
6. Ribeiro, D. M. S.; Conceição JR, P. O.; Sodário, R. D.; Marchi, M.; Aguiar, P. R.; Bianchi, E. C. Low-Cost Piezoelectric Transducer Applied To Workpiece Surface Monitoring in Grinding Process. *ABCM Int. Congr. Mech. Eng. - COBEM* **2015**, *23*.
7. Zhang, S.; Yu, D.; Sheng, S. A discrete STFT processor for real-time spectrum analysis. *IEEE Asia-Pacific Conf. Circuits Syst. Proceedings, APCCAS* **2006**, 1943–1946.
8. Alexandre, F. A.; Lopes, W. N.; Lofrano Dotto, F. R.; Ferreira, F. I.; Aguiar, P. R.; Bianchi, E. C.; Lopes, J. C. Tool condition monitoring of aluminum oxide grinding wheel using AE and fuzzy model. *Int. J. Adv. Manuf. Technol.* **2018**, *96*, 67–79.
9. De Freitas, E. S.; Baptista, F. G.; Budoya, D. E.; De Castro, B. A. Equivalent Circuit of Piezoelectric Diaphragms for Impedance-Based Structural Health Monitoring Applications. *IEEE Sens. J.* **2017**, *17*, 5537–5546.
10. Ribeiro, D. M. S.; Aguiar, P. R.; Fabiano, L. F. G.; M. D'Addona, D.; Baptista, F. G. Spectra measurements using piezoelectric diaphragms to detect burn in grinding process. *IEEE Trans. Instrum. Meas.* **2017**.
11. Marinescu, I. D.; Rowe, W. B.; Dimitrov, B.; Ohmori, H. *Tribology of Abrasive Machining Processes*; 2012; ISBN 9781437734676.



© 2018 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).