

A Comparative Design Analysis of Internal and External Frames Structures for MEMS Vibrating Ring Gyroscopes [†]

Waqas Amin Gill ^{*}, Ian Howard, Ilyas Mazhar and Kristoffer McKee ^{*}

Department of Mechanical Engineering, Curtin University, Perth, WA 6845, Australia;
email1@email.com (I.H.); email2@email.com (I.M.)

^{*} Correspondence: waqasamin.gill@postgrad.curtin.edu.au (W.A.G.); K.Mckee@curtin.edu.au (K.M.)

[†] Presented at the 10th International Electronic Conference on Sensors and Applications (ECSA-10), 15–30 November 2023; Available online: <https://ecsa-10.sciforum.net/>.

Abstract: This research presents a comparative analysis of the two important design methodologies involved in developing Microelectromechanical Systems (MEMS) vibrating ring gyroscopes, namely internal and external ring gyroscopes. Internal ring gyroscopes are constructed with the outside placement of support pillars connected with the semicircular beams that are attached to the vibrating ring structure. The design importance of this particular setting effectively isolates the vibrating ring structure from any external mechanical vibrations, significantly improving the gyroscope's performance. The Internal ring structure provides exceptional precession and reliability, making this design an ideal candidate for harsh conditions, as they can sustain substantial amounts of unwanted and external vibrations without degrading the performance of the gyroscope. On the other hand, external ring gyroscopes include the placement of the support pillars within the vibrating ring structure. This particular design setting is quite convenient in terms of fabrication and provides higher gyroscopic sensitivity. However, this design may lead to coupling the vibrational modes and potentially compromise the performance of the gyroscope. This research discusses and compares the finding of modal analysis of the two distinguished design approaches for the MEMS vibrating ring gyroscopes.

Keywords: MEMS; MEMS design; vibrating ring gyroscope; internal ring; external ring; ring resonator

Citation: Gill, W.A.; Howard, I.; Mazhar, I.; McKee, K. A Comparative Design Analysis of Internal and External Frames Structures for MEMS Vibrating Ring Gyroscopes. *Eng. Proc.* **2023**, *56*, x. <https://doi.org/10.3390/xxxxx>

Academic Editor(s): Name

Published: 15 November 2023



Copyright: © 2023 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

Microelectromechanical system (MEMS) inertial sensors have emerged as essential components of inertial measurement units (IMUs) and have experienced substantial proliferation in the field of space applications. The utilization of MEMS vibrating ring gyroscopes [1–8] has been the subject of substantial discourse in the realm of research and development, particularly in the context of space applications [9–11]. There are various other uses for MEMS vibrating ring gyroscopes in contemporary electrical systems. In the realm of smartphone technology, the utilization of inertial sensors that rely on MEMS vibrating gyroscopes has become increasingly prevalent. The utilization of this technology enhances the detection of angular movement in digital cameras, while also finding applications in other industries such as biomedical, missile technology, and rollover detections in automotive applications.

MEMS vibrating ring gyroscopes have favorable characteristics for their utilization in IMUs within space applications due to their symmetrical configuration, exceptional precision, and resilience in challenging environmental conditions [12–14]. The gyroscope's ring-shaped form, using semicircular springs, exhibits a symmetrical construction that enables to withstand challenging environmental conditions and high vibrations industries [15,16]. This work aims to analyze the comparative design study on two different

designs for MEMS vibrating ring gyroscope. This paper presents the comparative design methodology and early design modelling of the vibrating ring gyroscope. The present study focuses on the examination of modal analysis pertaining to the proposed vibrating ring gyroscope design.

2. Design Methodology

In order to improve performance, stability, and decouple vibrational modes, the frame structures of MEMS vibrating ring gyroscopes are important design considerations. There are particularly two types of frame structures, the inner ring gyroscope design and the outer ring gyroscope design. Both the mentioned design frames will be discussed in detail below.

2.1. Internal Ring Gyroscope

In this type of design frame, the anchor support designed outside of the vibrating ring structure. The vibrating ring structure is attached with the semicircular beams and the whole vibrating structure is attached to the outside placed pillars. This design configuration of an interior ring has the ability to improve the performance of the gyroscope by protecting the vibrating structure from any disruptive external vibrations. Because of their symmetric structure, inertial sensors with internal vibrating ring gyroscopes are indispensable in extreme conditions. They can withstand extreme conditions and vibrations, making them ideal inertial sensors for use in spacecraft applications. A schematic depiction of the internal ring gyroscope structure is shown in Figure 1.

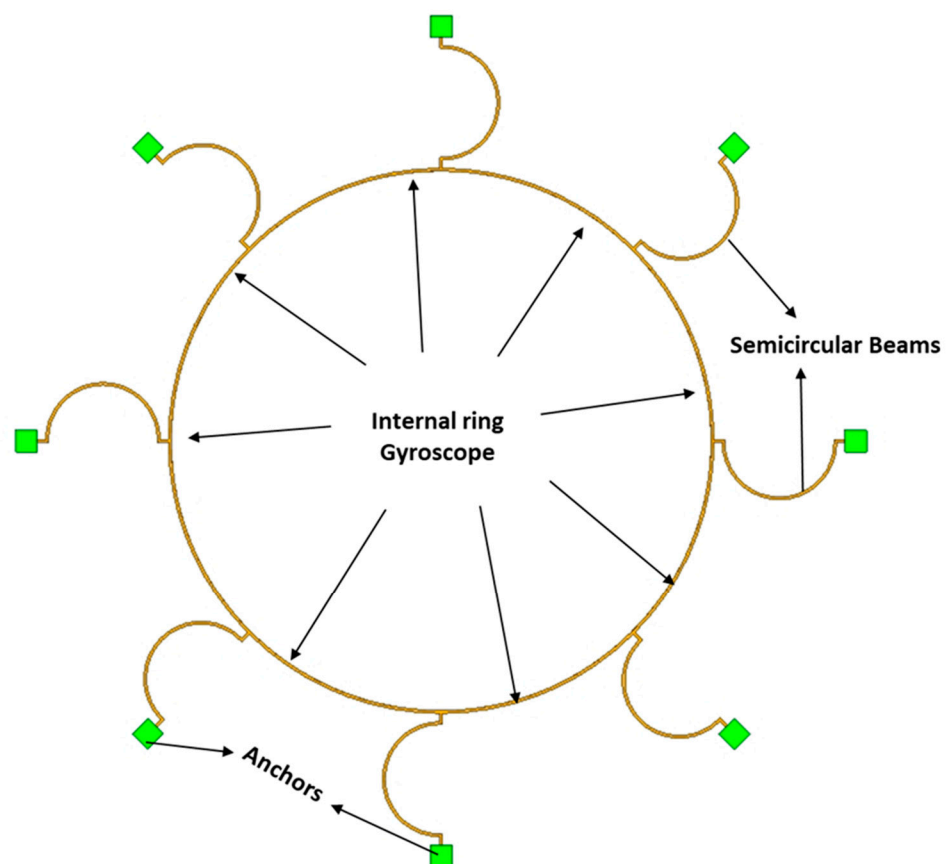


Figure 1. A schematic representation of the internal ring gyroscope.

2.2. External Ring Gyroscope

When designing and developing MEMS vibrating ring gyroscopes, it is usual practise to incorporate an external ring design structure. The external ring gyroscope was designed with the support anchor and semicircular beams construction integrated into its interior. This design strategy has the advantage of being able to handle bigger vibrating ring gyroscope structure, which significantly improves the gyroscope's overall sensitivity. However, unlike the internal ring gyroscope design, this method of design has various difficulties, most notably in terms of its resilience under extreme conditions and more sensitive to unwanted external vibrations. The external ring gyroscope is shown in Figure 2.

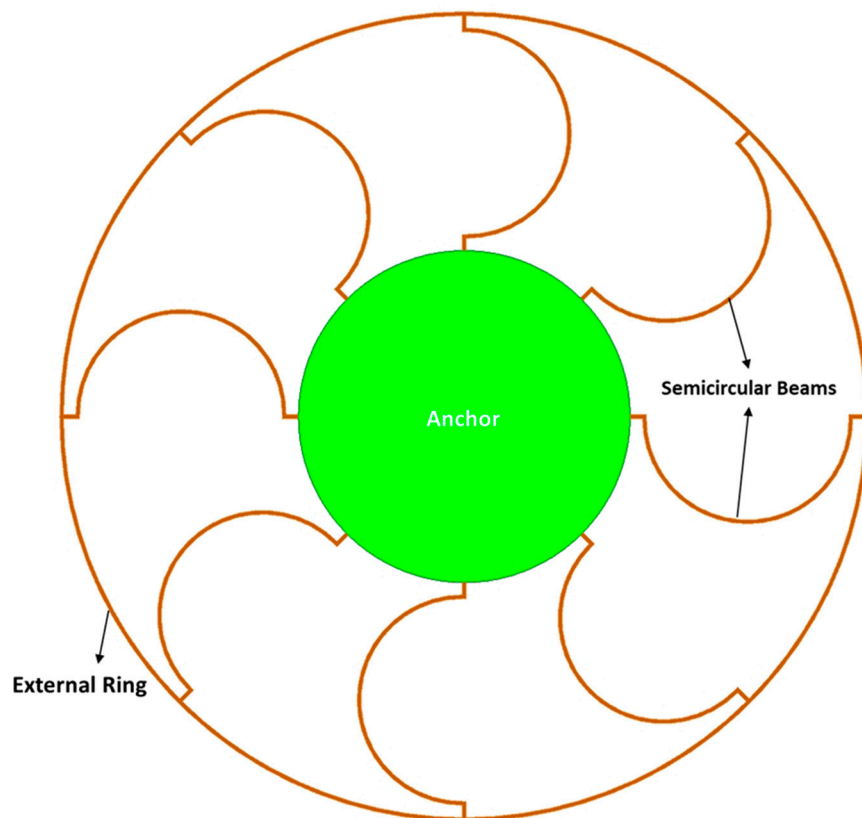


Figure 2. A schematic representation of the external ring gyroscope.

Internal and external ring gyroscopes can be used in a wide variety of vibrating ring gyroscope configurations. A few examples of these design configurations are gyroscopes with one or more rings, resonator disc, cylinders, shells, and stars. The external ring gyroscope can fit any of these gyroscope designs due to its flexible construction. Single ring gyroscopes, on the other hand, provide many benefits due to their internal design structure. Internal space in the internal ring gyroscope could be utilized for the installation of extra tuning electrodes or the planning and implementation of a microscale inertial sensor.

3. Simulation Analyses

The utilization of Finite Element Method (FEM) modal analysis is of utmost importance in computational analyses, particularly in the determination of vibration characteristics pertaining to mechanical structures such as the MEMS vibrating ring gyroscope. This methodology facilitates a comprehensive analysis of the dynamics and modal characteristics shown by the vibrating ring gyroscope. The modal analysis offers a comprehensive understanding of the vibrational modes and frequencies of a vibrating ring

gyroscope structure. This is achieved by discretizing the structure into finite elements and solving the resulting equations. The modal analysis using the FEM based software Ansys™ has been conducted for both internal and external vibrating ring gyroscopes.

3.1. Modal Analysis of Internal Ring Gyroscope

The modal analysis of the internal ring gyroscope is conducted based on its distinctive structural alteration. The design comprises a total of eight semicircular beams, all of which are connected to the internal ring resonator. The entirety of the vibrating ring structure is upheld by externally positioned support pillars around the vibrating structure. The presented design technique effectively implemented measures to isolate the vibrating ring structure from potential external disturbances that may have adverse effects on the overall performance of the gyroscope. The design features comprise on the several key parameters. These include a ring radius of 1000 μm , a semicircular beam radius of 200 μm , a ring and beam thickness of 10 μm , and a structural height of 100 μm . The frequencies depicted in Figure 13 for the internal ring design are 48.78 kHz and 48.80 kHz for mode 1 and mode 2, respectively. The mode mismatch recorded only 17 Hz which shows a good prospect of high sensitivity. The modal results are shown in Figure 3.

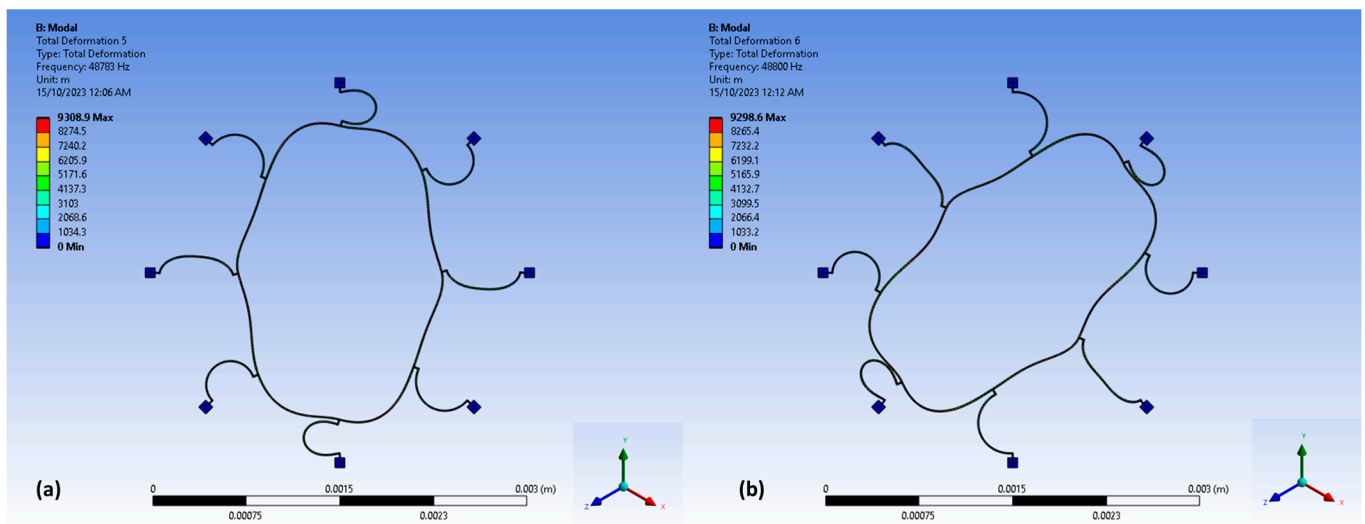


Figure 3. The modal analysis for the internal ring gyroscope (a) driving elliptical shape (b) sensing elliptical shape.

3.2. Modal Analysis of External Ring Gyroscope

In contrast, the external ring gyroscope, exemplifies a conventional methodology for vibrating ring gyroscope design. The external ring gyroscope exhibits the presence of eight semicircular beams that are connected to the external ring resonator, and the entire vibrating structure is interconnected to the centrally positioned circular pillar. The design features include a ring radius measuring 1000 μm , a semicircular beam radius of 200 μm , thicknesses of 10 μm for both the ring and the beams, and the structure has a height of 100 μm . The modal resonance frequencies results are illustrated in Figure 4, with mode 1 exhibiting a resonance frequency of 40.59 kHz and mode 2 displaying a resonance frequency of 40.63 kHz. The mode mismatch recorded 34 Hz which is slightly higher than the internal ring gyroscope design.

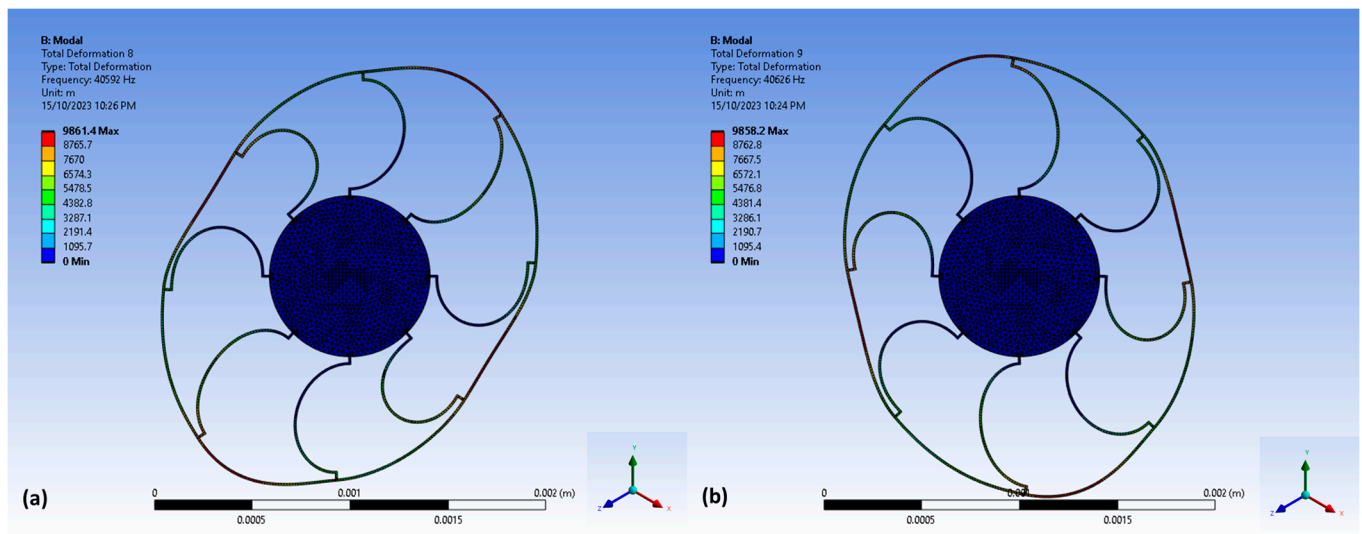


Figure 4. The modal analysis for the external ring gyroscope (a) driving elliptical shape (b) sensing elliptical shape.

Both designs possess identical design characteristics, with the exception being the design geometry. The radii of the vibrating ring and the semicircular beams are same in both gyroscopes. However, it was observed that the internal ring gyroscope exhibited elliptical vibrations at a frequency of around 49 kHz, whereas the external ring gyroscope displayed elliptical vibrations at a frequency of 40 kHz. The mode mismatches for internal and external ring gyroscopes are resulted at frequencies of 17 Hz and 34 Hz, as seen in Table 1. The results findings indicate that the internal ring gyroscope exhibits higher sensitivity and low mode mismatch between elliptical shapes of vibrations, rendering it a preferable candidate over the external ring design for vibrating ring gyroscopes.

Table 1. Modal analysis results for Internal and External ring gyroscope.

Vibrational Modes	Internal Ring Design	External Ring Design	Ring Radius (μm)	Ring Width (μm)	Semicircular Radius (μm)	Device Height (μm)
Driving (kHz)	48.78	40.59 kHz	1000	10	200	100
Sensing (kHz)	48.80	40.63 kHz	1000	10	200	100
Mode Mismatch (Hz)	17	34				

4. Conclusions

We successfully demonstrated two design types of MEMS vibrating ring gyroscopes, the internal ring and the external ring gyroscopes. Comparatively, the internal ring vibrating gyroscope with its outer pillar support shows a good stability against harsh environments. This makes it notably suitable for spacecraft applications. On the other hand, the external ring gyroscope with its centrally positioned pillar offers higher flexibility in design structure but with reduced robustness against high vibrations environment. The FEM modal analysis shows differences in the vibrational modes frequencies of both designs. Despite having identical design features, the internal ring gyroscope demonstrated higher sensitivity with higher resonance frequencies responses. The mode mismatch was observed to be just 17 Hz, in contrast to the 34 Hz for the external ring gyroscope. Therefore, the internal ring gyroscope emerges as the more favourable candidate for our further research in gyroscope.

Author Contributions: The research idea was proposed by W.A.G. and subsequently examined in collaboration with K.M. and W.A.G. conducted all aspects of the research project, including data collection, analysis, and the creation of graphic representations. The manuscript written by W.A.G. The final manuscript edited and reviewed by I.H., I.M. and K.M. All authors have read and agreed to the published version of the manuscript.

Funding: This research received no external funding.

Institutional Review Board Statement: Not applicable.

Informed Consent Statement: Not applicable.

Data Availability Statement: Not applicable.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Yoon, S.W.; Lee, S.; Najafi, K. Vibration sensitivity analysis of MEMS vibratory ring gyroscopes. *Sens. Actuators A Phys.* **2011**, *171*, 163–177.
2. Cao, H.; Liu, Y.; Kou, Z.; Zhang, Y.; Shao, X.; Gao, J.; Huang, K.; Shi, Y.; Tang, J.; Shen, C.; et al. Design, fabrication and experiment of double U-beam MEMS vibration ring gyroscope. *Micromachines* **2019**, *10*, 186.
3. Ayazi, F.; Najafi, K. A HARPSS polysilicon vibrating ring gyroscope. *J. Microelectromech Syst.* **2001**, *10*, 169–179.
4. Gill, W.A.; Howard, I.; Mazhar, I.; McKee, K. A Review of MEMS Vibrating Gyroscopes and Their Reliability Issues in Harsh Environments. *Sensors* **2022**, *22*, 7405.
5. Jia, J.; Ding, X.; Qin, Z.; Ruan, Z.; Li, W.; Liu, X.; Li, H. Overview and analysis of MEMS Coriolis vibratory ring gyroscope. *Measurement* **2021**, *182*, 109704.
6. Syed, W.U.; An, B.H.; Gill, W.A.; Saeed, N.; Al-Shaibah, M.; Al Dahmani, S.; Choi, D.; Elfadel, I.A.M. Sensor Design Migration: The Case of a VRG. *IEEE Sens. J.* **2019**, *19*, 10336–10346.
7. Lee, J.S.; An, B.H.; Mansouri, M.; Yassi, H.A.; Taha, I.; Gill, W.A.; Choi, D.S. MEMS vibrating wheel on gimbal gyroscope with high scale factor. *Microsyst Technol.* **2019**, *25*, 4645–4650.
8. Hyun An, B.; Gill, W.A.; Lee, J.S.; Han, S.; Chang, H.K.; Chatterjee, A.N.; Choi, D.S. Micro-electromechanical vibrating ring gyroscope with structural mode-matching in (100) silicon. *Sens. Lett.* **2018**, *16*, 548–551.
9. Kou, Z.; Liu, J.; Cao, H.; Han, Z.; Sun, Y.; Shi, Y.; Ren, S.; Zhang, Y. Investigation, modeling, and experiment of an MEMS S-springs vibrating ring gyroscope. *J. Micro/Nanolithography MEMS MOEMS* **2018**, *17*, 015001.
10. Gill, W.A.; Ali, D.; An, B.H.; Syed, W.U.; Saeed, N.; Al-shaibah, M.; Elfadel, I.M.; Al Dahmani, S.; Choi, D.S. MEMS multi-vibrating ring gyroscope for space applications. *Microsyst. Technol.* **2020**, *26*, 2527–2533.
11. Dussy, S.; Durrant, D.; Moy, A.; Perriault, N.; Celerier, B. (Eds.) MEMS gyros for space applications-overview of european activities. In *AIAA Guidance, Navigation, and Control Conference and Exhibit*; 2005.
12. Gill, W.A.; Howard, I.; Mazhar, I.; McKee, K. Development of Starfish-Shaped Two-Ring Microelectromechanical Systems (MEMS) Vibratory Ring Gyroscope with C-Shaped Springs for Higher Sensitivity. *Eng. Proc.* **2022**, *27*, 36.
13. Chikovani, V.V.; Tsiuruk, H.V. Digital rate MEMS vibratory gyroscope modeling, tuning and simulation results. *Comput. Y Sist.* **2017**, *21*, 147–159.
14. Khan, I.; Ting, D.S.; Ahamed, M.J. Design and development of a MEMS vibrating ring resonator with inner rose petal spring supports. *Microsyst Technol.* **2021**, *27*, 985–995.
15. Kou, Z.; Liu, J.; Cao, H.; Shi, Y.; Ren, J.; Zhang, Y. A novel MEMS S-springs vibrating ring gyroscope with atmosphere package. *AIP Adv.* **2017**, *7*.
16. Gill, W.A.; Howard, I.; Mazhar, I.; McKee, K. Design and Considerations: Microelectromechanical System (MEMS) Vibrating Ring Resonator Gyroscopes. *Designs* **2023**, *7*, 106.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.