

Integrated Low-Cost Wearable Electrocardiograph System of Primary Assessment for Cases of Rural Residents [†]

Spyridon Mitropoulos ^{1,*}, Pavlos Chalkiadakis ² and Ioannis Christakis ²

¹ Department of Surveying and Geoinformatics Engineering, University of West Attica, Agiou Spyridonos Str., 122 43 Egaleo, Greece

² Department of Electrical and Electronics Engineering, University of West Attica, 250 Thivon Avenue, 122 44 Athens, Greece; pchalk@uniwa.gr (P.C.); jchr@uniwa.gr (I.C.)

* Correspondence: smitro@uniwa.gr

[†] Presented at The 11th International Electronic Conference on Sensors and Applications (ECSA-11), 26–28 November 2024; Available online: <https://sciforum.net/event/ecsa-11>.

Abstract: In recent years, advances in both technology and medicine have made great progress. With the development of technology, low-cost and high-precision sensors have emerged and microcontrollers with high computing power and low power consumption have been created. In densely populated urban areas, health care is provided by a set of hospitals and medical centers where every patient can find an immediate response to his health problem. However, medical care, particularly in non-urban areas, remains limited as many such areas do not have a hospital or medical center nearby. This results in inadequate medical care, both diagnostic and preventive, for the inhabitants of these areas. Today, the development of microprocessors, the high-speed internet and the low-cost sensors that have been developed can enable the creation of autonomous, accessible health monitoring units. In this work, an integrated low-cost, wearable electrocardiograph system is presented. The system is able to operate anywhere there is an active internet connection. The proposed system consists of two parts. Firstly, the wearable ECG which can be located in the patient's home. Secondly, the information system, in which the data is collected and visualized, so that the doctor has immediate access. Health is a precious commodity and the application of technology is imperative, especially for the health care of citizens in remote areas.

Keywords: ECG; low-cost; IoT; remote monitoring; healthcare

Citation: Mitropoulos, S.; Chalkiadakis, P.; Christakis, I. Integrated Low-Cost Wearable Electrocardiograph System of Primary Assessment for Cases of Rural Residents. *Eng. Proc.* **2024**, *5*, x. <https://doi.org/10.3390/xxxxx>

Academic Editor(s):

Published: 26 November 2024



Copyright: © 2024 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

According to the World Health Organization (WHO), cardiovascular disease (CVD) is the leading cause of death worldwide. An estimated 17.9 million people will die from CVD in 2019, representing 32% of all deaths worldwide. Of these deaths, 85% will be due to heart attack and stroke. Of the 17 million premature deaths (under age 70) from non-communicable diseases in 2019, 38% were due to CVD. Most cardiovascular diseases can be prevented by addressing behavioral and environmental risk factors such as smoking, unhealthy diet and obesity, lack of exercise, harmful use of alcohol, and air pollution. More than three-quarters of CVD deaths occur in low and middle income countries. It is important to identify cardiovascular disease as early as possible and initiate management with counseling and medications [1]. The most common form of arrhythmia is atrial fibrillation, which represents a major medical challenge. Atrial fibrillation is associated with a high risk of cardiovascular events, including cardiovascular death, heart failure, ischemic heart disease, sudden cardiac death, and stroke [2]. Atrial fibrillation can be diagnosed by feeling the pulse, but can be inaccurate due to increased heart rate. Therefore, it is most reliably diagnosed using electrocardiography (ECG).

It is important to identify cardiovascular disease as early as possible so that counseling and medical management can be initiated. The electrical activity of the heart is recorded by electrocardiography (ECG). The ECG signal is a bipolar low frequency weak signal and the normal excitation of the signal is 0.05–100 Hz [3]. Diagnosis from an ECG signal can help in various heart related diseases. The recording of an electrocardiogram is carried out by placing electrodes in the patient's body, through which the electrical signals are received [4].

The research study [5] presented the wireless ECG monitoring system using Raspberry pi as a development board and eHealth sensor platform. Their interconnection was done with a connection board developed by Cooking Hacks. The data taken from the electrodes was sent to a database. The work [6] presents a health monitoring system using IoT, based on Android, and specifically presents the necessary infrastructure such as microcontroller, communication protocols, and database management system. A health monitoring system is presented in the work [7], consisting of an ECG sensor and an accelerometer. The data were analyzed both to extract useful physiological parameters and to detect abnormalities in the patient's behavior and heart-related problems. In [8] a low-power ECG monitoring system with wearable capability is presented. In detail, the design of a system with features, low-cost, wearability and low power is presented. The ZigBee protocol was used for data transmission, and a low power ADC (ADS1246) from Texas Instruments was used. The paper [9] presents a brief review of suitable components for building a portable ECG device, citing several companies that have successfully designed their own remote ECG monitoring systems. In [10] a five module system for cardiac monitoring systems is proposed. The system includes body sensors, signal conditioners, analog to digital (ADC) and pressure converters. It also supports remote transmission and analysis. Focusing on the use of mobile phones for monitoring, without the need for additional hardware, thus increasing ease of use.

In general, the structure of a wearable device includes a biosensor and a microcontroller module. Usually the microcontroller includes battery management, Wi-Fi transmission, etc. [11]. Regarding the sampling of an ECG signal, it is obvious that higher accuracy requires higher sampling frequency. During the acquisition of the ECG signal, signal noise is also received, either from the contact of the electrodes with the body or from noise due to the power supply of other devices. These types of noise interfere with the signal and should be minimized [12]. The use of a filter is ideal for these cases. There are two types of filters, analog and digital. The choice of filter plays an important role in the quality of the corrected signal resulting from it [13]. The papers [14,15] present the implementation of analog filter in ECG devices, which consist of passive elements, resistor, inductor, and capacitor. Digital filters give the possibility, as the correction of the signal is done dynamically, of changing the parameters of the filter. This requires computational power and results in much better signal filtering. Digital filters in low-cost ECG devices are presented in [16–18]. Focusing on the energy efficiency of low-cost systems, according to the work [19] this is achievable on affordable microcontrollers through a set of facts to be evaluated during implementation.

Following our work [20], as a continuation of our research efforts, this paper presents an integrated, low-cost, ECG monitoring system. The proposed system consists of a wearable ECG monitoring device and an information system. The portable device consists of a low-cost microcontroller which supports wireless networking for data transmission and a low-cost ECG sensor. This system can be placed inside health centers in remote areas or even in the patient's home. The information system is used to collect, store and visualize the data. In addition, the filtering of the signal with a digital filter was implemented and the results were satisfactory. With the proposed system, the doctor remotely can have the ECG of a patient directly available.

The article is structured as follows: Section 2 presents the Materials and Methods, Section 3 covers the Results and Discussion and Section 4 the Conclusions.

2. Materials and Methods

2.1. ECG Characteristic Analysis

Figure 1 describes a reasonably typical ECG signal [21]. Three characteristic features of the waveform are easily identified: the P wave, the QRS complex, and the T wave. The P wave is associated with the activation of the atria, the QRS complex with the activation of the ventricles, and the T wave with repolarization of the ventricles.

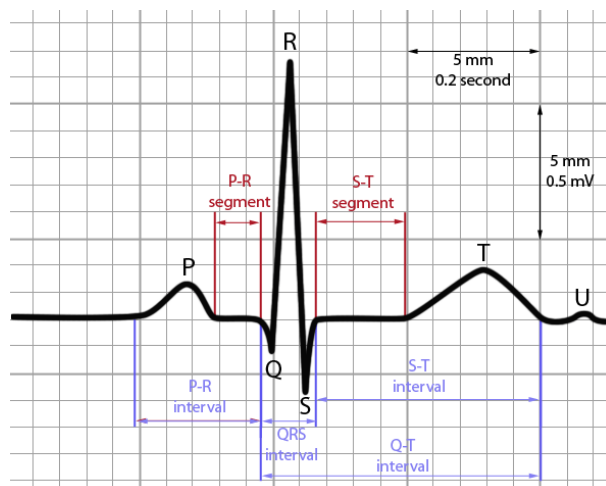


Figure 1. Typical ECG signal [21].

In Figure 1 the electrocardiogram intervals are depicted. The P-R interval is the time from the beginning of the P wave to the start of the QRS complex. The QRS interval or duration or width, is the time from the beginning to the end of the QRS complex. The QT interval is the time from the beginning of the QRS complex to the end of the T wave. The RR interval is the time from the peak of one R wave to that of the following R wave.

2.2. Design and Implementation of a Wearable ECG Device

This study presents the implementation of a low-cost portable ECG monitoring station. The data transmission is done via a wireless network (Wi-Fi). Each station consists of a microcontroller and an ECG sensor. The microcontroller chosen is the affordable TTGO@ESP32 (Shenzhen, China) [22] (Figure 2a). It can cover the computing power required by the proposed ECG monitoring station. Also can provide a large number of analog and digital ports, as well as communication protocols (UART, SPI, I2C) and wireless networking (Wi-Fi). The affordable and low power Single-Lead, Heart Rate Monitor Front End sensor AD8232 (SparkFun Electronics, 80503, USA) from Analog Devices was chosen as the ECG sensor [23] (Figure 2b).



(a)



(b)

Figure 2. The parts of low-cost ECG device: (a) TTGO@ESP32 microcontroller; (b) AD8232 ECG sensor.

The electrodes of the AD8232 sensor (Figure 3a) are placed in specific positions on the body [24], as shown in Figure 3b. Regarding the wearability of the sensor's electrodes on the human body, a section of fabric was used on which the electrodes are placed at the appropriate points. The fabric on one side is placed on the shoulder and wrapped around the human body while the other side is attached by hook-and-loop fasteners to the fabric.

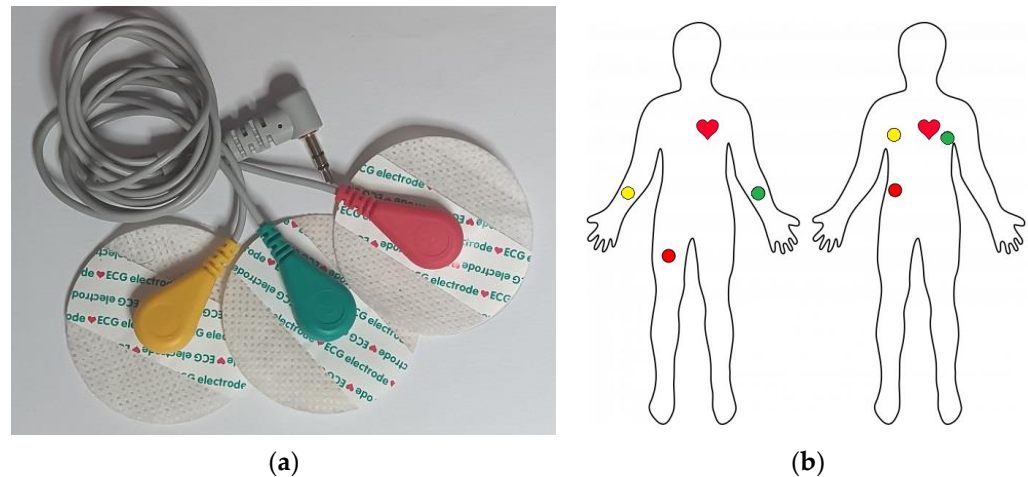


Figure 3. Sensor's electrodes and electrodes placement: (a) Set of three electrodes of low-cost ECG sensor [24]; (b) Typical sensor points on the human body [24].

To achieve the portability of the device, a small form factor plastic box (110 mm × 60 mm × 30 mm) was used, while powering the device is possible even with a mobile phone charger (micro USB-5 volt). The final composition of the low cost electrocardiograph with all its components (microcontroller, ECG sensor and sensor electrodes), is shown in Figure 4.

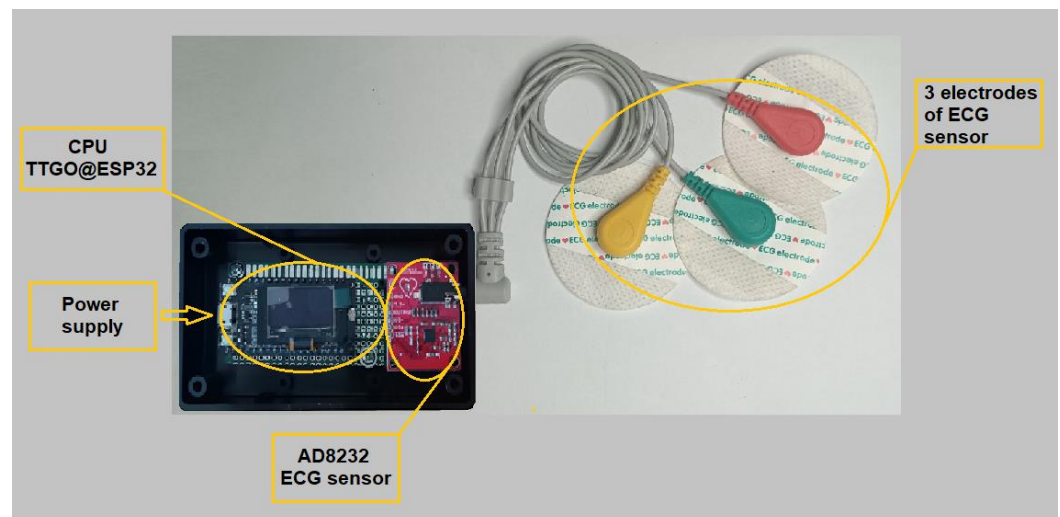


Figure 4. The complete construction of the low-cost electrocardiograph.

2.3. Design and Implementation of an Information System for the Collection and Visualisation of ECG Data

The information system is based on an open source operating system (based on Linux), while two open source server applications are running on it. The first server supports an open source database specifically designed for time series data, while the other server supports web-based software for data visualization.

The use of open source software is preferred against proprietary software because it allows the source code to be adapted according to the requirements of the any implementation from the community. Also encourages participation and contribution by members of the community and researchers. In our work, InfluxDB [25] was chosen because it is designed strictly for time series data. InfluxDB presents similarities to SQL database, but is very different in functionality in many perspectives. It is designed to manage and store large volumes of time series data, while quickly performing real-time analysis. InfluxDB stores data in so called buckets. Data in buckets, can be distinguished based on timestamp and/or tags associated with each point in time uniquely. This is like a SQL database table where the primary key is predefined by the system and is always time.

Data visualization for the end user is done through a web page on the internet, using the Grafana lab software [26]. Grafana is an open source software, which in addition to visualization performs data analysis with the help of customizable dashboards. Grafana can connect to various databases like Prometheus, Influx DB, MySQL, etc. The open configuration environment of this software allows the implementation of custom plugins to connect to any data source of choice. From the Grafana environment the user can both study and analyze the data. In addition, it is possible to monitor data over a period of time, technically called time-series analytics. Thus, it provides an easy interface management environment, for creating dashboards and processing them with various metric tools already included, making it user-friendly. In addition, in Grafana software users are divided into roles such as “administrator”, “operator” and “viewer”, where each role has defined access/use rights, therefore controlling which user has the ability to change the data, as well as the privacy of the data and its dissemination to third parties. Finally, it should be clarified that the connections for data transmission in all cases, both the connection of the measuring device to the database and the connection of the database to the visualization software, are achieved with a unique API key for each connection.

3. Results and Discussion

According to the operation of the software inside the microcontroller, a packet with measurements is created. Every packet is about eight seconds long. Each point (measurement) inside that packet, is acquired with an interval of 500 microseconds apart.

A total of 16.384 measurements are taken. The package of measurements is then formatted appropriately, and sent to the database via the Wi-Fi.

The raw data of the measurements are shown in Figure 5. It can be noticed that the cardiogram contains a lot of signal noise in respect to Figure 1. This results in a not easily recognizable diagram. The periods of the signal as depicted from Figure 1 are not distinguished easily.

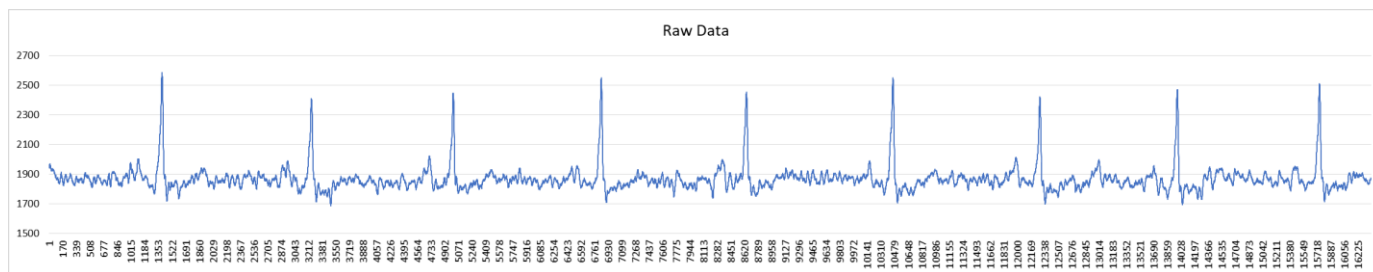


Figure 5. Primary measurements of low-cost ECG.

Both for research and evaluation purposes, the moving average method was applied in different interval values.

The figures below show the results for different intervals. The Figures 6, 7, 8, show the corrected signal with intervals of 50, 100 and 200 points, respectively.

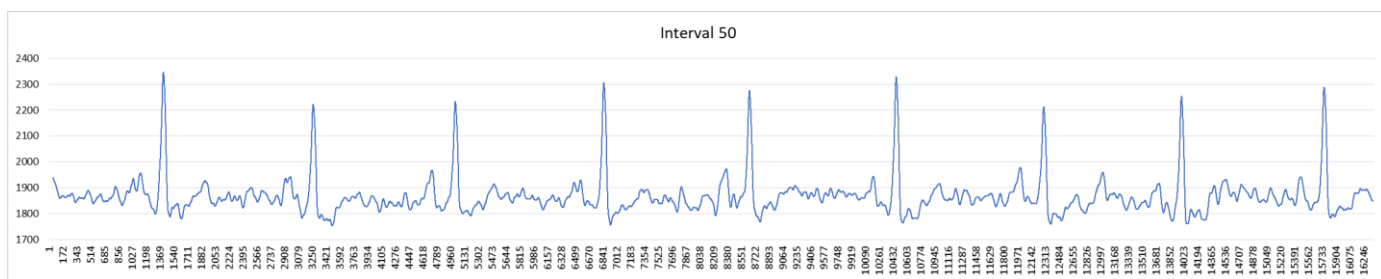


Figure 6. Corrected measurements by moving average method (Interval = 50 points).

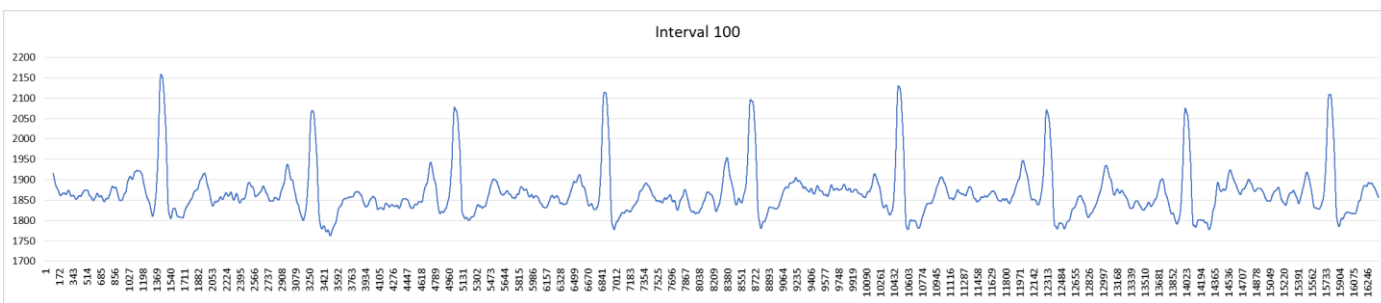


Figure 7. Corrected measurements by moving average method (Interval = 100 points).

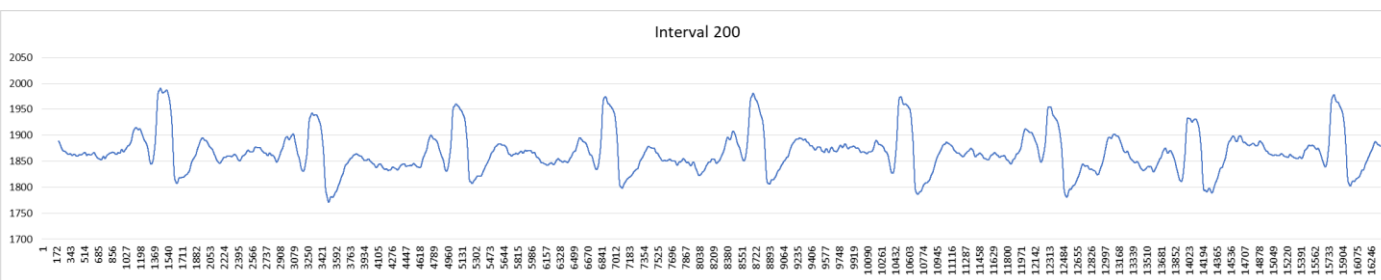


Figure 8. Corrected measurements by moving average method (Interval = 200 points).

Observing the Figures 6–8, it is obvious that the signal is more distinct in Figure 7 where the interval value of the moving average method is 100 points, compared to Figures 6 and 8, where in Figure 6 (interval value 50 points) the noise is evident, while in Figure 8 (interval value 200 points) the signal distortion is clearly visible. In Figure 9, a time section of Figure 7 is shown to illustrate the specific points P, Q, R, S, T of the cardiogram.

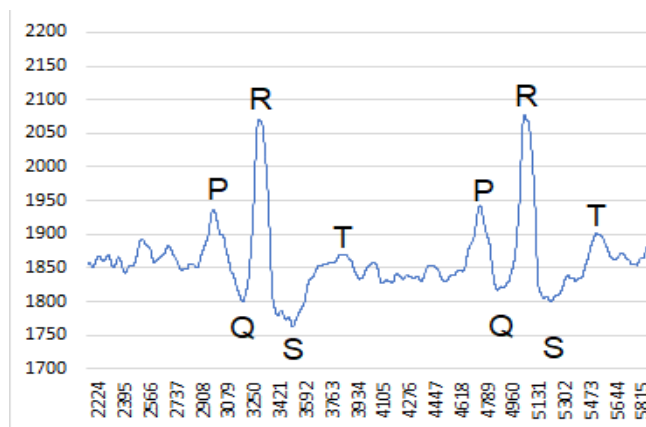


Figure 9. Time section of corrected measurements and P, Q, R, S, T points.

Through the web-based Grafana software, a doctor can see the results of the measurement as shown in Figure 10. For the purposes of the experiment, both data, raw and the corrected measurements, are shown in this figure.



Figure 10. Grafana, ECG measurements dashboard.

More specifically, Figure 11 shows the raw measurements, with the noise clearly in place, distorting the observable signal. Figure 12 shows the corrected measurements using the moving average method, where the noise reduction is evident.

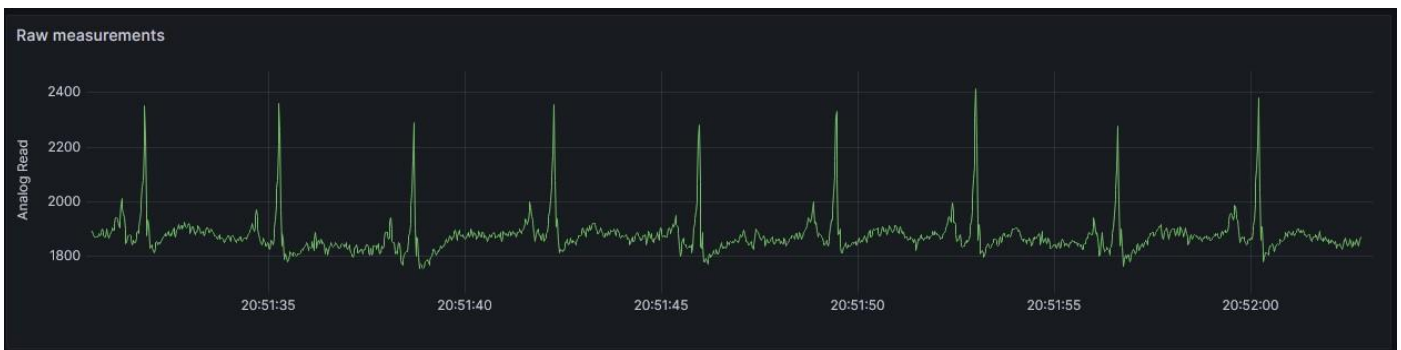


Figure 11. Grafana, low-cost ECG Raw measurements, panel.

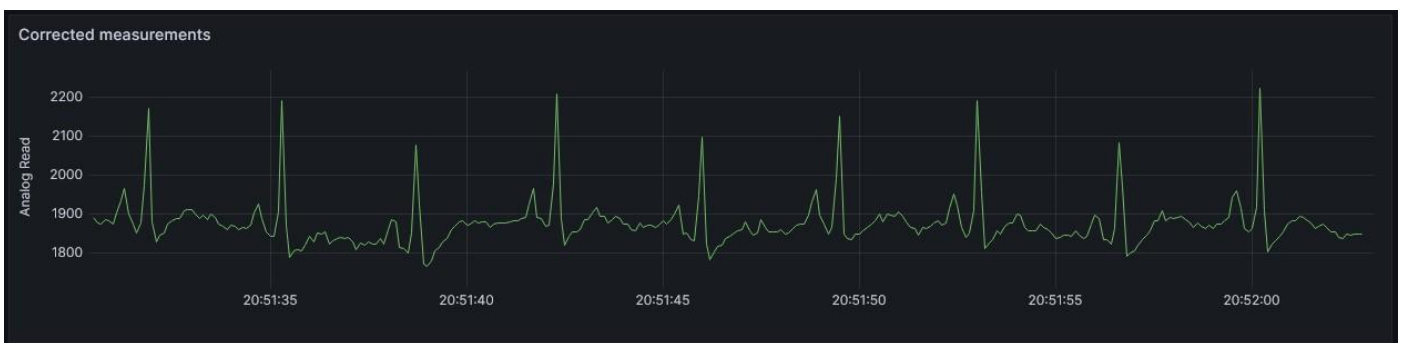


Figure 12. Grafana, low-cost ECG Corrected measurements, panel.

The overall results are of particular interest, as the aim of this work is to demonstrate the usefulness of a low-cost ECG system especially in the health sector. Obviously, this system cannot replace professionally calibrated cardiograph devices, but it can be used as a first step of diagnosis by the doctor, remotely, for people who live in remote areas and areas where health services are not at a short distance. Since we are referring to low-cost sensors, it is understood that the quality of the measurements will not be excellent. This is also evident from the raw measurements according to Figure 11. The solution to this problem is by using the moving average method where the result is shown at Figure 12. This method, despite its simplicity is proven to be quite satisfactory. Figure 12, also depicts the points P, Q, R, S, T, which for the doctor are of critical importance for the interpretation of the cardiogram.

4. Conclusions

Health is a common good for all, and it is imperative that technology contributes to the field of medicine with the aim of medical prevention.

This work presents an integrated low-cost electrocardiograph system, consisting of a measurement device and an information system. The aim is to enable the doctor to monitor the patient's electrocardiogram remotely. Obviously the proposed system cannot replace professional systems, but the application of the system can be used as a first diagnostic tool for people living in remote areas.

The proposed system and the methodology followed demonstrate excellent results, as it works in real time, while the correction of the signal from the noise resulted in the emergence of important and necessary parameters according to which the doctor can interpret the cardiogram. Low-cost systems (CPU, sensors) can be used in a wide range of applications for human service. Their application in the field of health is an area of research, and the development of such applications and systems can be used as a first step in diagnosis, which can save lives. Further testing in such systems and especially using open source software, may advance this type of fields greatly and in less time.

Author Contributions: Conceptualization, S.M. and I.C.; methodology, S.M., P.C. and I.C.; software, S.M. and I.C.; validation, S.M. and I.C.; formal analysis, S.M., P.C. and I.C.; investigation, P.C. and I.C.; resources, S.M. and I.C.; data curation, S.M. and P.C.; writing—original draft preparation, S.M. and I.C.; writing—review and editing, P.C. and I.C.; visualization, S.M. and I.C.; supervision, S.M. and I.C.; project administration, I.C. All authors have read and agreed to the published version of the manuscript.

Funding: This research received no external funding.

Institutional Review Board Statement:

Informed Consent Statement: Not applicable.

Data Availability Statement: Conflicts of Interest: The authors declare no conflict of interest.

References

1. WHO. Cardiovascular Diseases (CVDs). World Health Organization. Available online: [https://www.who.int/news-room/fact-sheets/detail/cardiovascular-diseases-\(cvds\)](https://www.who.int/news-room/fact-sheets/detail/cardiovascular-diseases-(cvds)) (accessed on).
2. Odutayo, A.; Wong, C.X.; Hsiao, A. J.; Hopewell, S.; Altman, D. G.; Emdin, C. A. Atrial Fibrillation and Risks of Cardiovascular Disease, Renal Disease, and Death: Systematic Review and Meta-Analysis. *BMJ* **2016**, *354*, i4482. <https://doi.org/10.1136/bmj.i4482>.
3. Al-Busaidi, A.M.; Khrijji, L. Digitally Filtered ECG Signal Using Low-Cost Microcontroller. In Proceedings of the 2013 International Conference on Control, Decision and Information Technologies (CoDIT), Hammamet, Tunisia, 6–8 May 2013. <https://doi.org/10.1109/codit.2013.6689554>.
4. Bui, N.T.; Phan, D.T.; Nguyen, T.P.; Hoang, G.; Choi, J.; Bui, Q.C.; Oh, J. Real-Time Filtering and ECG Signal Processing Based on Dual-Core Digital Signal Controller System. *IEEE Sens.* **2020**, *20*, 6492–6503.
5. Yakut, O.; Solak, S.; Bolat, E. D. Implementation of a web-based wireless ECG measuring and recording system. In Proceedings of the 17th International Conference on Medical Physics and Medical Sciences, Istanbul, Turkey, October 2015; Volume 9, No. 10, pp. 815–818.

6. Mohammed, J.; Lung, C.H.; Oceanu, A.; Thakral, A.; Jones, C.; Adler, A. Internet of Things: Remote patient monitoring using web services and cloud computing. In Proceedings of the 2014 IEEE International Conference on Internet of Things (IThings), and IEEE Green Computing and Communications (GreenCom) and IEEE Cyber, Physical and Social Computing (CPSCom), Taipei, Taiwan, 1–3 September 2014; pp. 256–263.
7. Luštrek, M.; Gjoreski, H.; Kozina, S.; Cvetkovic, B.; Mirchevska, V.; Gams, M. Detecting falls with location sensors and accelerometers. *Proc. AAAI Conf. Artif. Intell.* **2011**, *25*, 1662–1667.
8. Spanò, E.; Di Pascoli, S.; Iannaccone, G. Low-power wearable ECG monitoring system for multiple-patient remote monitoring. *IEEE Sens. J.* **2016**, *16*, 5452–5462.
9. Vidyashree, K.N.; Sathyanarayana, B. S.; Kumar, S. P.; Sudarshan, B. G. A Review On Design of Portable Ecg System-. *Int. J. Innov. Res. Dev.* **2013**.
10. Jain, P.K.; Tiwari, A. K. Heart Monitoring Systems—A Review. *Comput. Biol. Med.* **2014**, *54*, 1–13. <https://doi.org/10.1016/j.combiomed.2014.08.014>.
11. Bui, N.T.; Vo, T.H.; Kim, B.-k.; Oh, J. Design of a Solar-Powered Portable ECG Device with Optimal Power Consumption and High Accuracy Measurement. *Appl. Sci.* **2019**, *9*, 2129.
12. Barhatte, A.S.; Ghongade, R.; Tekale, S.V. Noise Analysis of ECG Signal Using Fast ICA. In Proceedings of the 2016 Conference on Advances in Signal Processing (CASP), Pune, India, 9–11 June 2016.
13. Saxena, S.; Jais, R.; Hota, M.K. Removal of Powerline Interference from ECG Signal using FIR, IIR, DWT and NLMS Adaptive-Filter. In Proceedings of the 2019 International Conference on Communication and Signal Processing (ICCSP), Chennai, India, 4–6 April 2019.
14. Gifari, M.W.; Zakaria, H.; Mengko, R. Design of ECG Homecare: 12-lead ECG acquisition using single channel ECG device developed on AD8232 analog front end. In Proceedings of the 2015 International Conference on Electrical Engineering and Informatics (ICEEI), Denpasar, Indonesia, 10–11 August 2015; IEEE: Piscataway, NJ, USA, 2015; pp. 371–376.
15. Asgari, S.; Mehriani, A. A Novel Low-Complexity Digital Filter Design for Wearable ECG Devices. *PLoS ONE* **2017**, *12*, e0175139. <https://doi.org/10.1371/journal.pone.0175139>.
16. Rachman, R.A.; Wisana, I. D. G. H.; Nugraha, P. C. Development of a Low-Cost and Efficient ECG Devices with IIR Digital Filter Design. *Indones. J. Electron. Electromed. Eng. Med. Inform.* **2021**, *3*, 21–28. <https://doi.org/10.35882/ijeemi.v3i1.4>.
17. Tripathi, K.; Sohal, H.; Jain, S. Design and Implementation of Robust Low Power ECG Pre-Processing Module. *IETE J. Res.* **2022**, *68*, 2716–2722. <https://doi.org/10.1080/03772063.2020.1725660>.
18. Farag, M.M. A Tiny Matched Filter-Based CNN for Inter-Patient ECG Classification and Arrhythmia Detection at the Edge. *Sensors* **2023**, *23*, 1365. <https://doi.org/10.3390/s23031365>.
19. Katsoulis, S.; Koulouras, G.; Christakis, I. Energy-Efficient Data Acquisition and Control System Using Both LoRaWAN and Wi-Fi Communication for Smart Classrooms. In Proceedings of the 2024 13th International Conference on Modern Circuits and Systems Technologies (MOCASST), Sofia, Bulgaria, 26–28 June 2024; pp. 1–4. <https://doi.org/10.1109/mocast61810.2024.10615862>.
20. Mitropoulos, S.; Rimpas, D.; Chalkiadakis, P.; Orfanos, V.; Christakis, I. Integrated open-source heart rate and SpO2 monitoring system. In Proceedings of the MOL2NET'23, Conference on Molecular, Biomed., Comput. & Network Science and Engineering, 9th ed., 25–31 December 2023; MDPI: Basel, Switzerland, 2023.
21. Cardiovascular Lab: Electrocardiogram: Introduction. Available online: www.medicine.mcgill.ca. <https://www.medicine.mcgill.ca/physio/vlab/cardio/introECG.htm> (accessed on).
22. Santos, S. ESP32 with Built-in SX1276 Lora and SSD1306 OLED Display (Review), Maker Advisor. 2023. Available online: <https://makeradvisor.com/esp32-sx1276-lora-ssd1306-oled/> (accessed on).
23. SparkFun Single Lead Heart Rate Monitor-AD8232-SEN-12650-SparkFun Electronics. Sparkfun.com. Available online: <https://www.sparkfun.com/products/12650> (accessed on).
24. AD8232 Heart Rate Monitor Hookup Guide-SparkFun Learn. learn.sparkfun.com. Available online: <https://learn.sparkfun.com/tutorials/ad8232-heart-rate-monitor-hookup-guide> (accessed on).
25. Farmer, K. InfluxData. InfluxData. Available online: <https://www.influxdata.com/> (accessed on).
26. Grafana Labs. Grafana-The Open Platform for Analytics and Monitoring. Grafana Labs. Available online: <https://grafana.com/> (accessed on).

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.