

Using radar imagery data to determine mixed forests characteristics [†]

Viktor Sidorenkov ¹, Iuliia Achikolova ^{1,*}, Daniil Astapov ¹, Oleg Ryabtsev ¹

¹ All-Russian Research Institute for Silviculture and Mechanization of Forestry; forestvniilm@yandex.ru

* Correspondence: pipintook@yandex.ru; Tel.: +7 (950) 415-80-72

[†] Presented at the 3rd International Electronic Conference on *Forests* – Exploring New Discoveries and New Directions in Forests, 15 to 31 October 2022. Available online: <https://iecf2022.sciforum.net>

Abstract: Implementing inventory in remote and hard-to-reach forests is rather challenging. The study develops methods for identifying qualitative and quantitative characteristics of mixed forests using Sentinel-1 imagery. The relationships between standing volume, forest density, age, and number of trees and radar indicators are revealed. The results are compared with forest inventory materials for a part of the study area. For most stands there is a similarity in standing volume and forest density definition. The study demonstrate that it is possible to identify quantitative and qualitative forests characteristics using radar survey data.

Keywords: radar imagery; satellite survey; Sentinel-1; forest inventory; forest characteristics; standing volume; forest density

1. Introduction

A radar satellite survey has considerable potential for identifying quantitative and qualitative forest characteristics since it does not depend on cloudiness, weather, and illumination. Several studies demonstrate the possibility of using radar imagery to describe and estimate forest vegetation, the biomass in particular [1-8]. Our previous studies concerning the development of forest inventory interpretation methods showed the possibility of determining standing volume, forest density, and canopy closeness from radar satellite images. For even-aged forest stand which is formed under intense anthropogenic (forest cuttings) or natural (wildfires) impacts on forests, it is possible to determine the age and quality of the stand as radar image textural features allow to identify the forest age class. When forests have high species diversity, to develop forest inventory interpretation algorithms, it is necessary to establish a significant number of sampling plots, taking into account the regional forest features and growing conditions. A vast sampling plots network is essential for verification of various forest inventory methods based on satellite imagery. This research analyses a dataset from 360 sampling plots; it aims to design and approve methods of forest inventory interpretation using radar survey data. These methods create a fundament for elaborating automated services for processing radar satellite imagery to obtain forest characteristics and further transition to digital, intelligent production technologies in the field of forestry.

2. Materials and Methods

The fieldwork was conducted in the taiga zone of the European part of Russia and Western Siberia, including the territory of Kostroma, Vologda, Arkhangelsk, Nizhny Novgorod, Tyumen regions, and the Udmurt Republic. We established 360 sampling plots in forest formations of various species composition, age, standing volume, and density.

Citation: Sidorenkov, V.; Achikolova, I.; Astapov, D.; Ryabtsev, O. Using radar imagery data to determine mixed forests characteristics. *Environ. Sci. Proc.* **2022**, *4*, x. <https://doi.org/10.3390/xxxxx>

Academic Editor: Giorgos Mallinis

Published: date

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2022 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

Places for laying sampling plots were determined according to forest inventory materials and optical survey in two steps. On the first step, forest inventory materials were analyzed to identify differences in standing volume, density, and age. The second step was the analysis of optical survey materials. The territory was classified into forest and non-forest lands according to the NDVI index in winter imagery. For non-forest lands the NDVI values vary within 0.08-0.1 and depend on the regional forest features, shrub and trees growing rate, and reforestation on clearcut areas. The classification was implemented in Envi 5.2 software applying decision tree method, afterwards a mask of forest lands was created. Settlements, roads, shelterbelts were excluded from forest lands. Thus, the territory covered by forest vegetation was revealed.

The determined places for sampling plots were analyzed with unsupervised classification algorithm (IsoData) and the territory was estimated on moisture content by the MSI index (Moisture Stress Index) using images from July-August. The moisture content index in vegetation is a crucial indicator of the forest ecosystems diversity. In general, range of the MSI index for forest vegetation is from 0.08 to 0.4. Its value depends on the species composition of forest stands and reaches 0.07-0.08 for medium-aged, ripe and overmature coniferous stands, and more than 0.10 for soft-wooded broadleaved stands.

The designing methods for obtaining the characteristics of mixed forest stands and their testing was carried out on the basis of Sentinel-1 imagery data aged less than three years from the date of establishing sampling plots. The data were processed with multiple regression algorithms in the Statistica 13 software.

3. Results

According to data from radar images for January-February period on the territory of Western Siberia taiga zone, for pure pine stands, correlation dependences were revealed between standing volume and forest density and the following radar indicators: specific radar cross-section (SRCS) values in gamma-zero on the VV-polarization (GammaVV) and VH-polarization (GammaVH); the sum of the ERCS of objects in the value of gamma-zero on VV- and VH-polarizations (Sum), textural features "total mean" (GLCMMean), which is the cup product of the pixel value and frequency of its occurrence with the neighboring pixel (GLCMM). The highest correlation coefficients (0.4-0.5) between the observed and predicted values were found for the winter months – January and February. According to previous studies, for summer months, the correlation did not exceed 0.2 [9].

In order to improve the accuracy of determining forest characteristics, significant experimental work was performed to refine the analysis methods using various algorithms for suppressing speckle noise. Filtering methods of incoherent accumulation (Multilooking) and Frost were applied; images without filtering were processed as well.

The calculation of radar indices and Haralik texture characteristics was implemented for each dataset obtained from three options of amplitude radar images pre-processing (incoherent accumulation, Frost, no filtering). No changes were made to the algorithms for obtaining characteristics of radar images.

Data were processed in the open-source SNAP software provided by the European Space Agency. Radar images were processed with Graph Builder and Batch Processing modules that enabled to make and apply prepared processing algorithms (graphs) with customizable parameters. The calculation of the NRVI radar index was executed in Matlab. For suppressing speckle noise by the incoherent accumulation procedure, materials and graphs from our previous research on taiga forests were used [10].

Based on the selected radar imagery data, correlations of radar indicators with forest characteristics were calculated. The results obtained from the selected images are compared with the ones developed for all radar images for the entire observation period. At the end of the study, an assessment of whether the exclusion radar images with unfavorable conditions from analysis effects the correlation coefficient increase.

The first link in the statistical data processing system is the correlation analysis of the relationships between the quantitative and qualitative forest characteristics and the radar

survey indicators. Preliminary data analysis allowed to identify correlating features, which were later used to build relationship models between the standing volume and forest density with radar indicators based on multiple regression models. Correlation analysis showed weak dependences of standing volume, forest density, number of trees, age, and species composition on the survey indicators only for the winter months with stable snow cover.

In order to get quantitative and qualitative characteristics of forests according to radar survey data, a single algorithm of multiple factor regression was applied. Relationships between forest characteristics and the following indicators was found:

- specific radar cross-section (SRCS) values in gamma-zero on the VV-polarization (GammaVV);
- a radar index representing the ratio of four SRCS-objects in gamma-zero at VH-polarization to the sum of SRCS-objects in gamma-zero value at VV- and VH-polarizations (RVI);
- textural features "total mean" (GLCMMean), which is the cup product of the pixel value and frequency of its occurrence with the neighboring pixel (GLCMM);
- the scatter of the mean value of reference and neighboring pixels combinations (GLCMVariance);
- the linear connection value of the pixel pairs brightness levels (GLCMCCorrelation).

This approach helped to select the most appropriate method from the considered options of radar survey data pre-processing by various speckle-noise filtering methods.

The efficiency analysis of defining forest inventory indicators based on radar survey data applying various methods of preliminary image processing demonstrated close results (Table 1). Despite the high correlation coefficients of the observed and predictive features, the significance level for most analysis options is high ($p > 0.05$), which can cause forecast errors outside the analyzed statistical pool.

Table 1. Efficiency of determining forest characteristics using various methods of preliminary radar image processing.

Correlation coefficient between experimental and predicted values				
Filtering method	Forest characteristics			
	Standing volume, m ³ per ha	Relative forest density	Age, years	Number of trees, pieces per ha
Frost	0.74	0.7	0.83	0.71
Multilooking	0.8	0.8	0.8	0.8
No filter	0.78	0.86	0.72	0.71

The obtained relationships were tested for the territory of Oktyabrsky forestry in Kostroma region (Figures 11, 12).

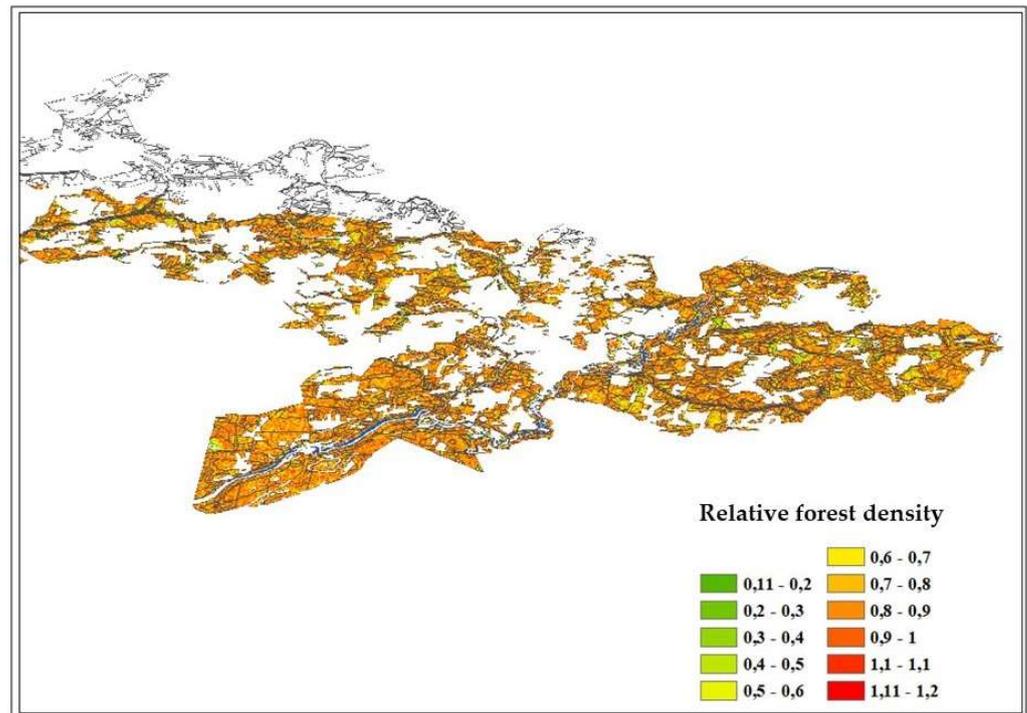


Figure 1. Deciphering forest density according to radar survey data.

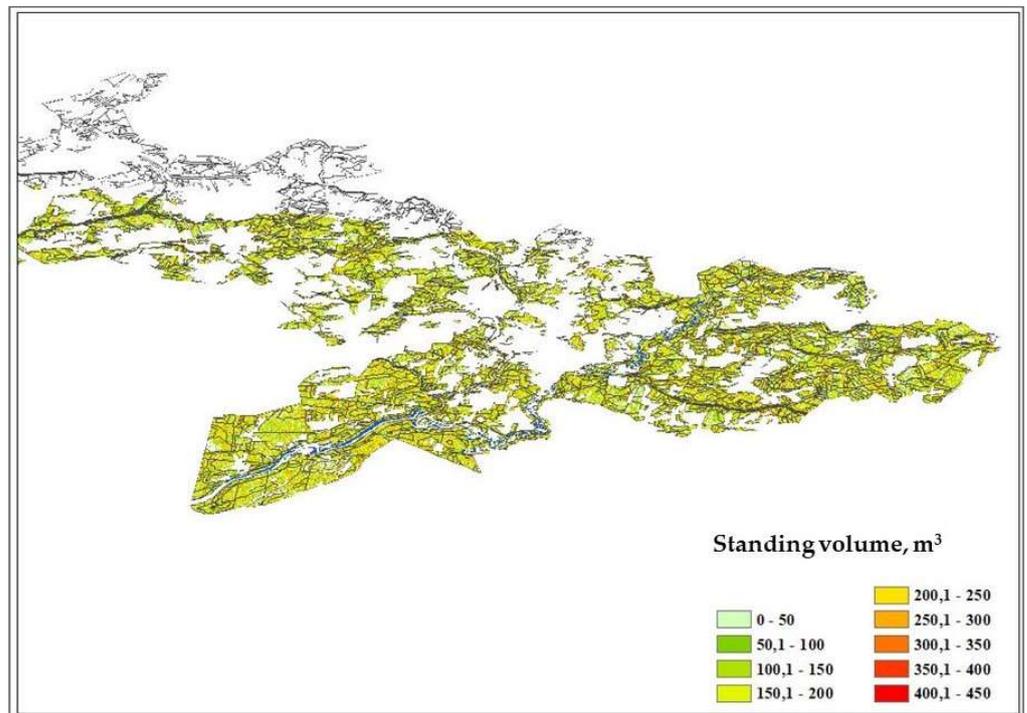


Figure 2. Deciphering standing volume according to radar survey data.

4. Discussion

The study results showed that applying the imagery pre-processing method with the incoherent accumulation provides the most accurate determining quantitative forest characteristics. Reliable values of standing volume and forest density can be obtained by models based on multiple regression. Relationships between standing volume, forest density, age, and the number of trees with the following radar indicators were revealed: specific radar cross-section (SRCS) values in gamma-zero on the VV-polarization (GammaVV),

VH-polarization (GammaVH); textural features "total mean" (GLCMMean); the scatter of the mean value of reference and neighboring pixels combinations (GLCMVariance); the linear connection value of the pixel pairs brightness levels (GLCMCCorrelation); GammaVH - GammaVV radar index (Diff), and GammaVH + GammaVV radar index (Sum). The results were compared with the forest inventory materials for a part of the study area. For most forest stands, there is a similarity in the definition of standing volume and forest density. The discrepancies may be caused by both the developed models' errors and the forest inventory data inaccuracy (usually about 20-30%, which is acceptable).

Author Contributions: Conceptualization, V.S. and I.A.; methodology, V.S.; software, V.S.; validation, V.S, D.A. and I.A.; formal analysis, D.A.; investigation, V.S, I.A and D.A.; resources, O.R.; data curation, V.S.; writing—original draft preparation, V.S; writing—review and editing, I.A.; visualization, V.S.; supervision, V.S. All authors have read and agreed to the published version of the manuscript.

Informed Consent Statement: Informed consent was obtained from all subjects involved in the study.

Data Availability Statement: Not applicable.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Hoscilo, A., Lewadowska, A., Ziolkowski, D., Sterenczak, K., Lisanczuk, M., Schmulius, C., Pathe, C. Forest aboveground biomass estimation using a combination of Sentinel-1 and Sentinel-2 data, IGARSS, 2018, New York, pp 9026-9029.
2. Kuplish, T.M., Curran, P.J. Temporal analysis of JERS-1/SAR images over regenerating forests in Brazilian Amazonia. Proceedings of IGARSS-99, Hamburg, Germany, 28 June – 2 July 1999.
3. Le Toan, T., Beaudoin, A., Riom, J., Guyon, D. Relating forest biomass to SAR data., IEEE Transaction on geoscience and remote sensing, Vol. 30, No. 2, March 1992.
4. Ulaby, F.T., El-Rayes, M.A. Microwave dielectric spectrum of vegetation – Part II: Dual-dispersion model. IEEE Transactions on Geoscience and Remote Sensing. 1987. GE-25(5), pp 550-557.
5. Frost V.S., Stiles J.A., Shanmugan K.S., Holtzman J.C. A Model for Radar Images and Its Application to Adaptive Digital Filtering of Multiplicative Noise. IEEE Transactions on Pattern Analysis and Machine Intelligence. 1982, T.: PAMI-4, Issue 2, pp 157-166.
6. Tsydypov, B.Z., Kirbizhekova, I.I., Dorzhiev, B.C., Ochirov, O N. Determination of forest biomass using satellite radar data. *Bulletin of the Buryat State Agricultural Academy*, 2010. Volume 3, pp 79-86.
7. Zakharov, A.I., Yakovlev, O.I., Smirnov, V.M. Satellite monitoring of the Earth: Radar sounding of the surface. Moscow, KRASAND; 2012, 248 p.
8. Kirbizhekova I.I., Chimitdorzhiev T.N., Garmaev A.M., Gusev M.A. Application of radar data for mapping the biomass of forest vegetation in conditions of complex terrain. *Izvestia of higher educational institutions. Physics*, 2013, Issue 82, Volume 56. pp 201-202.
9. Sidorenkov, V.M., Astapov, D.O., Badak, L.A., Achikolova, I.S. Possibilities of implementing forest inventory based on radar satellite imagery data on the example of ribbon forests in the Altai Territory. *Modern Problems of Remote Sensing of the Earth from Space*; Moscow, IKI RAN, 2021, p 329.
10. Sidorenkov, V.M., Kushnyr, O.V., Badak, L.A., Astapov, D.O., Bukas, A.V. Possibilities of forest inventory on the basis of radar satellite imagery data. *Research of the Earth from space*, 2021, Issue 5; pp 72-84.