

# Analysis and Simulation of Loading Impact Damping Characteristics for Two-stage Pressure Hydro-pneumatic Suspension of a Mining Dump Truck <sup>†</sup>

Gangfeng Wang <sup>\*</sup>, Yunxi Zhang, Xuefeng Suo and Xiang Liu

Key Laboratory of Road Construction Technology and Equipment of MOE, School of Construction Machinery, Chang'an University, Xi'an 710064, China; 2020125018@chd.edu.cn (Y.Z.); suoxuefeng@chd.edu.cn (X.S.); 2021225121@chd.edu.cn (X.L.)

<sup>\*</sup> Correspondence: wanggf@chd.edu.cn

<sup>†</sup> Presented at 1st International Electronic Conference on Machines and Applications, 15–30 September 2022; Available online: <https://iecm2022.sciforum.net/>.

**Abstract:** The high load capacity and the harsh working environment of mining dump trucks require suspension structures with good damping properties and simple structures. Hydro-pneumatic suspensions are widely used due to their non-linear stiffness and damping characteristics, which allow them to adapt to changes in external load excitation. To solve the problem of high stiffness of the vehicle under the loading impact conditions, which leads to easy damage to the suspension and tyre components, a two-stage pressure hydro-pneumatic suspension system is designed to meet the needs of the new vehicle based on the single-chamber hydro-pneumatic suspension. The 1/4 hydro-pneumatic suspension of a mining dump truck is applied as the research object. By comparing the pressure, dynamic deflection and acceleration of the two type suspension cylinders through simulation and experiment respectively, the damping characteristics of two-stage pressure hydro-pneumatic suspension system during the loading process are obtained.

**Keywords:** Mining dump truck; hydro-pneumatic suspension; damping characteristics; loading impact; double-accumulator

**Citation:** Wang, G.; Zhang, Y.; Suo, X.; Liu, X. Analysis and Simulation of Loading Impact Damping Characteristics for Two-stage Pressure Hydro-pneumatic Suspension of a Mining Dump Truck. *Eng. Proc.* **2022**, *3*, x. <https://doi.org/10.3390/xxxxx>

Published: 16 September 2022

**Publisher's Note:** MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



**Copyright:** © 2021 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

## 1. Introduction

Hydro-pneumatic suspensions are widely used on off-highway vehicles due to their variable stiffness and variable damping characteristics. The working environment of mining dump trucks is harsh, and the impact on the vehicle during operation can cause serious damage to the hydro-pneumatic suspension and tire components.

To improve the overall service life of the vehicle, this paper designs a two-stage pressure-type hydro-pneumatic suspension system and studies its damping characteristics under loading conditions[1]. A new type of two-stage pressure-type hydro-pneumatic suspension for mining dump trucks produced by a company is used as the research object. The single-chamber and two-stage pressure-type hydro-pneumatic systems are modeled by AMESim software, and the damping characteristics of the single-chamber hydro-pneumatic suspension and two-stage pressure hydro-pneumatic suspension in the loading process are analyzed through simulation and experimental comparison[2]. The two chambers of the two-stage pressure chamber hydro-pneumatic suspension do not participate in the work at the same time, when the spring load is not large, the main chamber acts alone, and the air pressure of the main chamber gradually increases with the increase of the load, when the pressure of the main chamber is greater than the air pressure of the compensation chamber, the two chambers will work at the same time, so as to ensure that the vehicle has basically the same inherent vibration frequency at no load and full load.

Figure 1 shows a sketch of the structure of two-stage pressure hydro-pneumatic suspension.

When the suspension is in the compression working, the piston and the piston rod move upward relative to the cylinder barrel, at this time, the volume of oil chamber I becomes smaller and the pressure becomes larger. The volume of oil chamber II becomes larger and the pressure becomes smaller, the check valve opens, and the hydraulic oil inside the oil chamber I is compressed to flow in two directions, part of the hydraulic oil flows into the oil chamber II through the check valve and the damping hole. The other part of the hydraulic oil flows into the low-pressure accumulator through the rubber hose, so that accumulator gas chamber is compressed, the volume becomes smaller and the pressure rises. When the pressure reaches the initial pressure of the high-pressure accumulator, the high-pressure accumulator opens and the hydraulic oil flows into the high-pressure accumulator through the rubber hose[3].

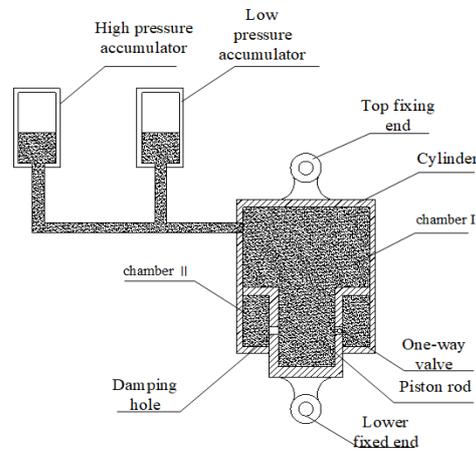


Figure 1. Schematic diagram of two-stage pressure hydro-pneumatic suspension structure.

## 2. Development and Analysis of the Mathematical Model of Hydro-pneumatic Suspension

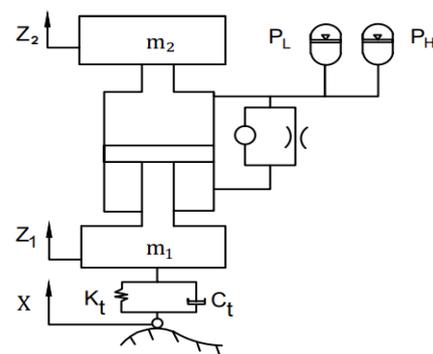


Figure 2. Mathematical model of two-stage pressure hydro-pneumatic suspension

Hydro-pneumatic suspension starts to work when the vehicle passes over road obstacles as shown in Figure 2, a mathematical model of the single wheel two degrees of freedom vibration of a heavy vehicle suspension system is established. This model only considers the vibration of the suspension in the vertical direction and ignores the vibration of the other degrees of freedom. The equations of motion for the suspended and non-suspended masses are obtained from the mathematical model as follows.

$$M_2 \ddot{X}_3 - F = 0 \tag{1}$$

$$M_1\ddot{X}_2 + F + K_1(X_2 - X_1) + C_1\dot{X}_2 = 0 \tag{2}$$

$M_1, M_2$ —non-suspended and suspended masses;  $Z_1, Z_2, X$ —pavement excitation, displacement of non-suspended and suspended masses;  $\ddot{X}_1, \ddot{X}_2$ —acceleration of non-suspended and suspended masses;  $\dot{X}_2$ —velocity of non-suspended mass blocks;  $\ddot{X}_3$ —relative acceleration of suspended masses;  $K_t$ —tyre stiffness;  $C_t$ —tyre damping;  $P_L$ —low pressure accumulators;  $P_H$ —high pressure accumulators.

### 3. Hydro-pneumatic Suspension Modeling and Simulation Using AMESim

In the AMESim simulation software, a two-stage pressure hydro-pneumatic suspension model was constructed based on the single air chamber as shown in Figure 3. The simulation model was created based on the actual structural parameters of a mining dump truck and the main parameters are shown in Table 1.

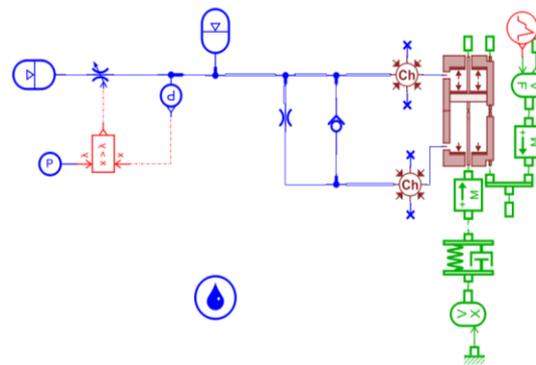


Figure 3. Two-stage pressure hydro-pneumatic suspension model.

Table 1. Hydro-pneumatic suspension model parameters

Name of parameter	Parameter values
Dynamic deflection characterization /mm	500
Cylinder bore /mm	220
Piston rod outer diameter /mm	180
Low-pressure accumulator initial pressure /MPa	1
Low-pressure accumulator initial volume /L	3.4
High-pressure accumulator initial pressure /MPa	4
High-pressure accumulator initial volume /L	4.264
Damping hole diameter /mm	15
Check valve diameter /mm	15
Tyre rigidity / N/m	$6 \times 10^6$
Tyre dampening/ $m \cdot s^{-1}$	20000
Suspension quality /Kg	3000
Non-suspended mass /Kg	3050
Gas variability index	1.4
Damping bore flow index	0.62
One-way valve flow coefficient	0.61

#### 3.1. Simulation Analysis and Experimental Comparison

The pressure and displacement sensors were installed on the oil and gas suspension during the experiments and the mounting positions are shown in Figure 4. The pressure and displacement information of the suspension was obtained by means of DEWE-2600 multi-channel data acquisition instrument[4,5].

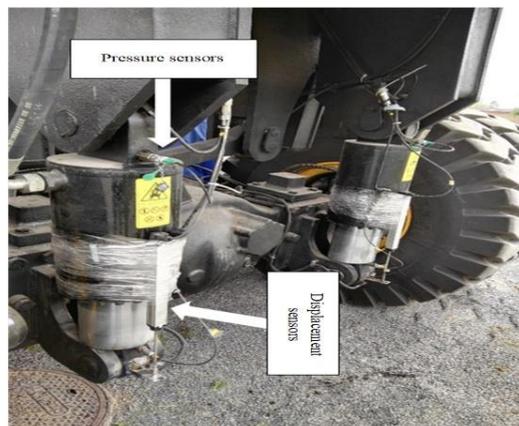


Figure 4. Sensors installation position.

The experimental vehicle is the newly developed TLD110 mining dump truck from Shaanxi Tongli Heavy Industries, with a body weight of 40 tones and a load capacity of 70 tones, having a total weight of 110 tones at full load.

To verify the correctness of the simulation analysis, the oil density and oil temperature during the simulation are consistent with the actual experiment. To exclude the factor of self-weight of the body to be considered during the experiment, the simulation model was first run unloaded for the 30s to make the system reach static equilibrium, and then seven times 10 tons of loading excitation was input one by one to obtain the pressure change curve of the suspension cylinder accumulator as shown in Figure 5. As can be seen from the graph, the cylinder pressure oscillation peak is getting smaller and smaller, which is due to the vehicle stiffness getting higher and higher during the loading process in the experiment, the uneven loading mass, the drop position, and the offset of the center of gravity of the loaded material[6,7]. The maximum relative error between the simulation data value and the experimental test value of the single air chamber hydro-pneumatic suspension is 5.70%, which is within a reasonable range and verifies the accuracy of the simulation model[8,9].

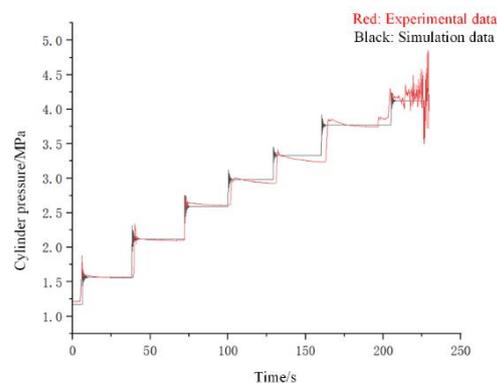


Figure 5. Pressure characteristic curve of hydro-pneumatic suspension.

### 3.2. Characteristic Analysis

#### 3.2.1. Pressure Characteristic Analysis

The hydro-pneumatic suspension pressure characteristic curve is shown in Figure 6. The cylinder pressure did not reach the high-pressure accumulator opening pressure during the first six loadings, the high-pressure accumulator of two-stage pressure type did not work at this time, and the cylinder pressure reached the high-pressure accumulator opening pressure during the seventh loading, and the high-pressure accumulator worked. From the graph, the peak pressure of the cylinder of the single-chamber hydro-pneumatic suspension is 4.93MPa, and the peak pressure of the cylinder of the two-stage pressure type hydro-pneumatic suspension is 4.75MPa, the peak pressure of the cylinder of the new hydro-pneumatic suspension is reduced by 0.18MPa[10,11]. Then, the cylinder pressure changes of both suspensions tend to be close to each other, which indicates that the two-stage pressure-type hydro-pneumatic suspension is more responsive and can protect the suspension better.

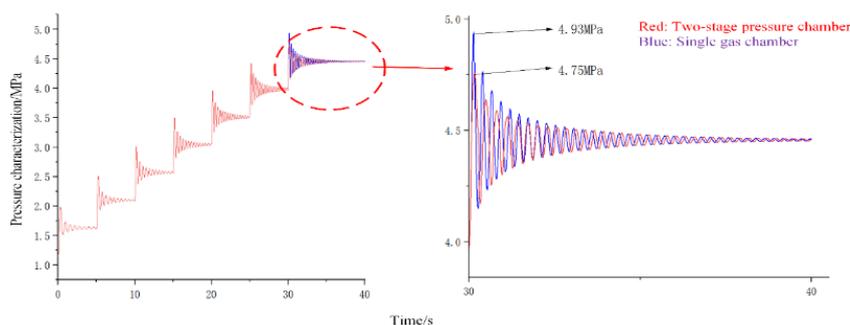


Figure 6. Variation curve of cylinder pressure.

### 3.2.2. Dynamic Deflection Characteristics Analysis

The dynamic deflection characteristics of the hydro-pneumatic suspension piston concerning cylinder barrel are shown in Figure 7. The two-stage pressure type high-pressure accumulator did not work during the first six loadings, and the high-pressure accumulator worked during the seventh loading.

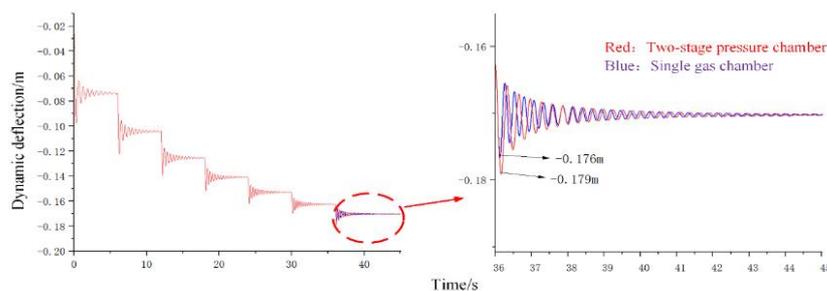


Figure 7. Variation curve of dynamic deflection.

### 3.2.3. Acceleration Analysis

The acceleration changes curve of the oil and gas suspension is shown in Figure 8. The two-stage pressure high-pressure accumulator did not work during the first six loadings, and the high-pressure accumulator worked when the seventh load. As can be seen from the figure, the acceleration peak of the two-stage pressure hydro-pneumatic suspension is decreased by 62.3%, compared with the single-chamber hydro-pneumatic suspension of  $-3.88\text{m}\cdot\text{s}^{-2}$ .

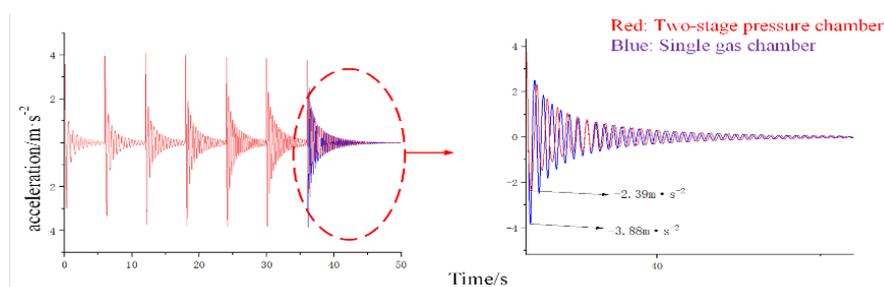


Figure 8. Variation curve of acceleration.

#### 4. Conclusion

A two-stage pressure hydro-pneumatic suspension was designed based on the original single chamber hydro-pneumatic suspension, and the output characteristics of the hydro-pneumatic suspension system were analyzed and studied under the vehicle loading impact. The following results can be obtained from simulation and experiment analysis: 1) the peak pressure of the cylinder of the improved two-stage pressure-type hydro-pneumatic suspension is reduced by 0.18 Mpa; 2) the maximum displacement of the piston compression stroke of the new two-stage pressure hydro-pneumatic suspension increases by 3mm during the loading shock, and the two-stage pressure hydro-pneumatic suspension system is more conducive to stabilizing the body under the same excitation. The simulation and test analysis proved that the two-stage accumulator system is effective in improving the impact resistance and smoothness and stability of heavy vehicles.

**Author Contributions:** Conceptualization, G.W.; methodology, G.W. and X.S.; software, Y.Z. and X.L.; formal analysis, Y.Z. and X.L.; writing—original draft preparation, Y.Z.; funding acquisition, G.W. and X.S. All authors have read and agreed to the published version of the manuscript.

**Funding:** This work was supported in part by the Natural Science Basic Research Project of Shaanxi Province, China (Grant No. 2019JM-073).

**Institutional Review Board Statement:** Not applicable.

**Informed Consent Statement:** Not applicable.

**Data Availability Statement:** No new data were created or analyzed in this study. Data sharing is not applicable to this article.

**Conflicts of Interest:** The authors declare no conflict of interest.

#### References

- Liu, H.B. Performance Parameters Effect Analysis of Interconnected Hydro-pneumatic Suspension Based on AMESim. *Machine Tool & Hydraulics* **2017**, *45*, 130-136.
- Liu, J.Q.; Wang Y.C.; Wang C.Z. Study on Stiffness Characteristics of Interconnected Hydro-pneumatic Suspension System with Inclined Suspension Cylinders. *Machine Tool & Hydraulics* **2019**, *47*, 59-63.
- Suo X.F.; Jiao S.J.; Wang G.F. Experimental Study on Vibration and Impact Characteristics of Hydro-pneumatic Suspension of a Mine Dump Truck. *Noise and Vibration Control*, **2020**, *40*: 173-176+240.
- Ma L.Z. Research On Ride Comfort Of Multi-Axle Emergency Rescue Vehicle. *Yan Shan University*, **2021**.
- Sun C.B.; Ma D.W.; Zhu Z.L. Vibration performance of interconnected hydro-pneumatic suspension based on the damping assembly at different positions. *Journal of Machine Design* **2015**, *32*, 34-40.
- Sun Y.B. Research on Characteristics of Hybrid-interconnected Hydro-pneumatic Suspension and Analysis of Ride Comfort. *Dalian University of Technology*, **2016**.
- Tian W.P.; Yang Y.K.; Wang W. The Influence of the Interconnection Forms of Hydro-pneumatic Suspension on Vehicle Stability. *Automotive Engineering* **2017**, *39*, 1362-1367+1389.
- Wang S.; Fang Q.; Zhang L.J. Research on the Influence of Electric Hydraulic Damper on the Ride Comfort of Tracked Vehicle. *Vehicle & Power Technology* **2021**, *3*, 21-27.
- Wei Z.L.; Xiu X.; Zhuang X.Y. Design of Hydro Pneumatic Spring Balanced Suspension System for Heavy Trailer. *Internal Combustion Engine & Parts* **2021**, *20*, 1-2.

- 
10. You Z.; He R.; Liu W.G. Performance Analysis of Hydro-Pneumatic Suspension of Truck Based on Stiffness and Damping Characteristics. *Machinery Design & Manufacture* **2022**, *373*, 223-227. 1  
2
  11. Zhang L.; Liu Q.S.; Wang Z.P. Electro-hydraulic Brake Control for Improved Ride Comfort in Four-wheel-independently-actuated Electric Vehicles. *Journal of Mechanical Engineering* **2020**, *56*, 125-134. 3  
4  
5