

# Wireless Channel Assessment of Auditoriums for the Deployment of Augmented Reality Systems for Enhanced Show Experience of Impaired Persons <sup>†</sup>

Imanol Picallo <sup>1</sup>, Aida Vidal Balea <sup>2,3</sup>, Peio Lopez-Iturri <sup>1,4,\*</sup>, Paula Fraga-Lamas <sup>2,3</sup>, Hicham Klaina <sup>5</sup>, Tiago M. Fernández-Caramés <sup>2,3</sup>, and Francisco Falcone <sup>1,4</sup>

<sup>1</sup> Department of Electric, Electronic and Communication Engineering, Public University of Navarre, 31006 Pamplona, Navarra, Spain; imanol.picallo@unavarra.es (I.P.); peio.lopez@unavarra.es (P.L.-I.); francisco.falcone@unavarra.es (F.F.)

<sup>2</sup> Dept. of Computer Engineering, Faculty of Computer Science, Universidade da Coruña, 15071, A Coruña, Spain; aida.vidal@udc.es (A.V.-B.); paula.fraga@udc.es (P.F.-L.); tiago.fernandez@udc.es (T.M.F.-C.)

<sup>3</sup> Centro de Investigación CITIC, Universidade da Coruña, 15071, A Coruña, Spain

<sup>4</sup> Institute for Smart Cities, Public University of Navarre, 31006 Pamplona, Navarra, Spain

<sup>5</sup> Department of Signal theory and Communications, University of Vigo, 36310 Vigo, Spain; hklaina@uvigo.es (H.C.)

\* Correspondence: peio.lopez@unavarra.es; Tel.: +34-948-169082 (P.L.-I.)

† Presented at the 6th International Electronic Conference on Sensors and Applications, 15–30 November 2019; Available online: <https://ecsa-6.sciforum.net/>

Published: date

**Abstract:** Auditoriums and theaters are buildings in which concerts, shows and conferences are held, offering a diverse and dynamic cultural offer to citizens. Unfortunately, people with impairments usually have difficulties in order to fully experience all the provided cultural activities, since such environments are not totally adapted to their necessities. For example, in an auditorium, visually impaired users have to be accompanied to their seats by staff, as well as when the person wants to leave the event in the middle of the show (e.g., to go to the toilette) or when he/she wants to move around during breaks. This work is aimed at improving the autonomy of disabled people within the mentioned kind of environments, as well as in enhancing their show experience by deploying Wireless Sensor Networks and Wireless Body Area Networks connected to an augmented reality device (Microsoft HoloLens smart glasses). For that purpose, intensive measurements have been taken in a real scenario (Baluarte Congress Center and Auditorium of Navarre) located in the city of Pamplona. The results show that this kind of environments presents high wireless interference at different frequency bands due to the existing wireless systems deployed within them, such as multiple WiFi access points, wireless microphones or wireless communication systems used by the show staff. Therefore, radio channel simulations have been also performed with the aim of assessing the potential deployment of the proposed solution. The presented work can lead to the deployment of augmented reality systems within auditoriums and theaters, boosting the development of new applications.

**Keywords:** Auditorium; Wireless Channel; Augmented Reality; HoloLens; Impaired persons; Enhanced show experience

---

## 1. Introduction

According to the latest WHO reports [1], 2.2 billion people suffer from some type of visual impairment. The diseases that can cause severe visual impairment or even blindness are glaucoma, diabetic retinopathy or macular degeneration.

In the literature, numerous studies have presented assistive devices for people with visual impairments, specifically, smart glasses for the recognition of obstacles that send information to the person with disabilities through audio [2]. In this work [3], a detection intelligent stick is added to the smart glasses for objects that are outside the user's viewing area. This stick provides fall detection, sending the GPS coordinates of the user to a predefined contact. In indoor environments, the solution is complicated, as it requires the deployment of ZigBee or BLE sensors to determine the path that people with disabilities has to follow [4,5].

In environments such as auditoriums or theaters, there are usually devices for people with hearing impairments that may be mild (hearing devices) or high (Modulated Frequency systems transmitters for users wearing cochlear implants), but no guidance devices are available for people with visual disabilities. This work wants to overcome this barrier, and for this, a network of wireless sensors and body area sensors connected to an Augmented Reality (AR) device like Microsoft HoloLens smart glasses [6] is proposed to improve the autonomy of people with disabilities as well as their experience in this type of environments. The deployment will be carried out in the Baluarte Palace of Congresses and Auditorium of Navarre, located in the city of Pamplona, in the main auditorium that is inside. The objective is therefore that people with disabilities can move freely throughout the auditorium, without the help of hostess services.

The radio characterization has been carried out through simulations based on 3D-Ray Launching software (3D RL), where the dimensions of the auditorium have been considered together with the dielectric properties of the obstacle materials, such as the dielectric constant and the conductivity. The results show that an optimized radio planning could be a key issue due mainly to the interference levels present within the auditorium.

## 2. AR solution for visual impaired people

AR has evolved significantly since the 1960s from the technological and business standpoint. Recently, it has been pointed out as a key technology enabler for Industry 4.0 [7] due to their potential applications. Nevertheless, its use to enhance leisure activities is still very incipient. In the case of people with visual impairments, AR has the potential to enable a wide range of user-friendly and real-time applications, like providing information and assistance (e.g., vibrations for haptic feedback, sign-reading assistance [8]), locating items, guidance and navigation, interacting with Internet of Things (IoT) devices or augmented collaboration.

Among the different commercial AR devices, Microsoft HoloLens smart glasses were chosen since they are one the most promising AR headsets on the market. HoloLens contains a custom-built Holographic Processing Unit (HPU 1.0), 2 GB of RAM and 64 GB of Flash, embedded sensors, see-through holographic lenses, automatic pupillary distance calibration and human-machine interfaces (voice support, gaze tracking, spatial sound and gesture recognition). In addition, the smart glasses can be connected to other devices through WiFi (IEEE 802.11 ac) or Bluetooth 4.1, and its battery lasts approximately 2 to 3 hours with an active use and up to two weeks in stand-by mode.

## 3. Radio characterization of the auditorium

In order to characterize the radio channel within the proposed auditorium scenario, intensive measurement campaigns for both to characterize the radio channel and to assess the present interference levels have been carried out. In addition, simulations by means of the 3D RL in-house developed code have been performed. The algorithm is based on geometrical optics (GO) and geometrical theory of diffraction (GTD). The code has been programmed in Matlab, and an exhaustive description of its operation procedure is presented in [9].

### 3.1. Auditorium under analysis

The scenario object of the radio planning studio is the Baluarte Congress Center and Auditorium of Navarre, which is located in the city of Pamplona. Baluarte is composed of different rooms, among which the main auditorium stands out for its size, as can be seen in Figure 1. It has a total capacity of

1,568 seats, which are divided into 1,036 in the room and 532 in the auditorium box. It has dimensions of 65.26 m x 30.58 m x 16 m (length x width x height). The room is paneled in beech wood and the seats are made of leather. Table 1 shows the parameters of the materials that the auditorium is composed of and which have been considered in the simulations.



(a)



(b)



(c)

**Figure 1.** Baluarte Congress Center and Auditorium of Navarre [10]: (a) Outside view; (b) Main auditorium front view; (c) Main auditorium back view.

**Table 1.** Material properties for Ray Launching simulations (at 2.4 GHz).

Material	$\epsilon_r$	Conductivity (S/m)
Beech wood	2.0473	0.0527
Seat leather	1.2	0.24
Concrete	8.5	0.02
Metal	4.5	$37.8 \times 10^6$

During the measurement campaign, several spectrograms were measured to analyze potential interfering systems in the auditorium and thus be able to plan the placement of the wireless sensor network. Such spectrograms were obtained with an Agilent’s FieldFox N9912A spectrum analyzer. In Figures 2 and 3, the spectrograms are shown in the 2.4 GHz and 5 GHz bands, where the amount of interfering systems in Baluarte mainly shows WiFi channels in both bands. This is important to keep in mind, since Microsoft HoloLens glasses operate both at 2.4 GHz and 5 GHz using IEEE 802.11ac and Bluetooth 4.1.

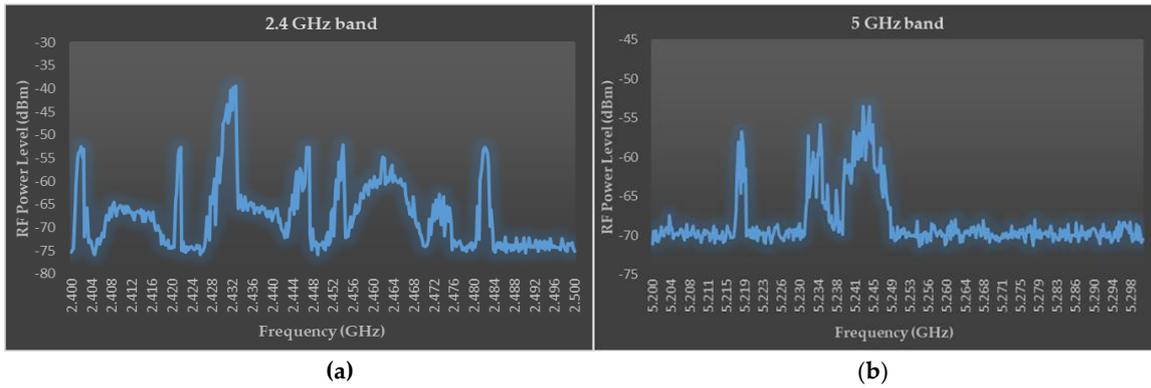


Figure 2. Measured spectrograms at: (a) 2.4 GHz band; (b) 5 GHz band.

3.2. Simulation versus Measured results

In this section, the simulation results obtained with the 3D RL tool are presented in order to compare them with real power measurements obtained with the spectrum analyzer for the frequencies of 2.4 GHz and 5.5 GHz, at different points of the auditorium to fully characterize it. In Figure 3, the Baluarte auditorium model created with the 3D RL is presented, where the transmitter (represented by a green square) is located on the audiovisual cabin shelf, 1.55 m above the ground, and the measurement points (represented by blue circles) are at the height of the seats, 1m above the ground.

The transmitter is a VCO (Voltage Controlled Oscillator) that operates with a different transmission power according to the operating frequency. At 2.4 GHz, the ZX95-2500 model was used, where the maximum VCO power is 8.38 dBm, while for 5.5 GHz the ZX95-5400 model was employed, where the maximum VCO power is -4.3 dBm. For both cases, a dual band antenna was used, which works in the ranges 2.4-2.5 GHz and 5.2-5.8 GHz. Table 2 shows a summary of the parameters configured in the simulations.

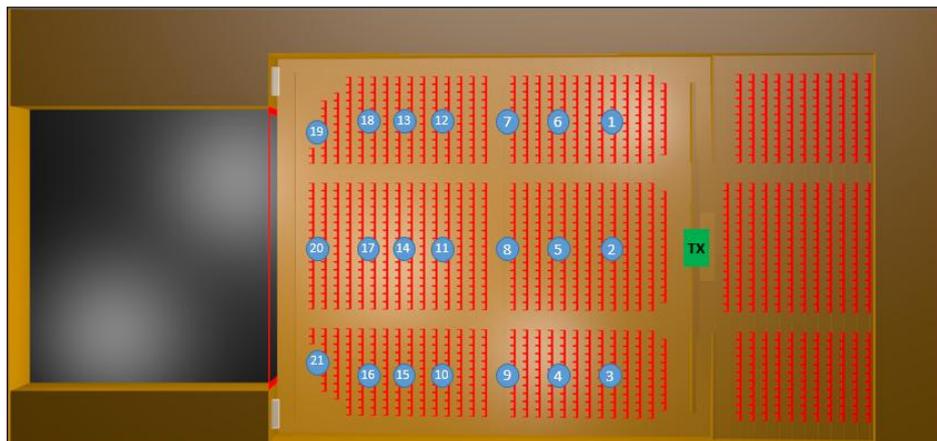


Figure 3. Auditorium scenario from upper view for the 3D Ray Launching simulations with the transmitter (green square) and receivers (blue circles).

Table 2. Ray-Launching simulation parameters.

Parameters	Values for 2.4 GHz	Values for 5.5 GHz
Transmitted Power	8.38 dBm	-4.3 dBm
Antenna Type/Gain	Monopole/0.3 dB	Monopole/3.74 dB
Launched rays resolution	1 degree	1 degree
Permitted maximum rebounds	6	6
Cuboids size (Mesh resolution)	50 cm × 50 cm × 50 cm	50 cm × 50 cm × 50 cm

Figure 4 shows compares the measurement and simulation results for 2.4 GHz and 5.5 GHz. As shown in the figure, for both working frequencies the 3D RL method is validated due to the similarity between measurements and simulations. For the higher operating frequency, lower power reception levels are obtained, mainly due to the increase in propagation losses and the lower transmission power. Specifically, at 2.4 GHz it is obtained a 0.78 dB mean error and a 0.6 dB standard deviation, while for 5.5 GHz it is obtained a 2.38 dB mean error and a 2.7 dB standard deviation. These results indicate that the 3D RL tool is valid for planning the deployment of the wireless sensor network.

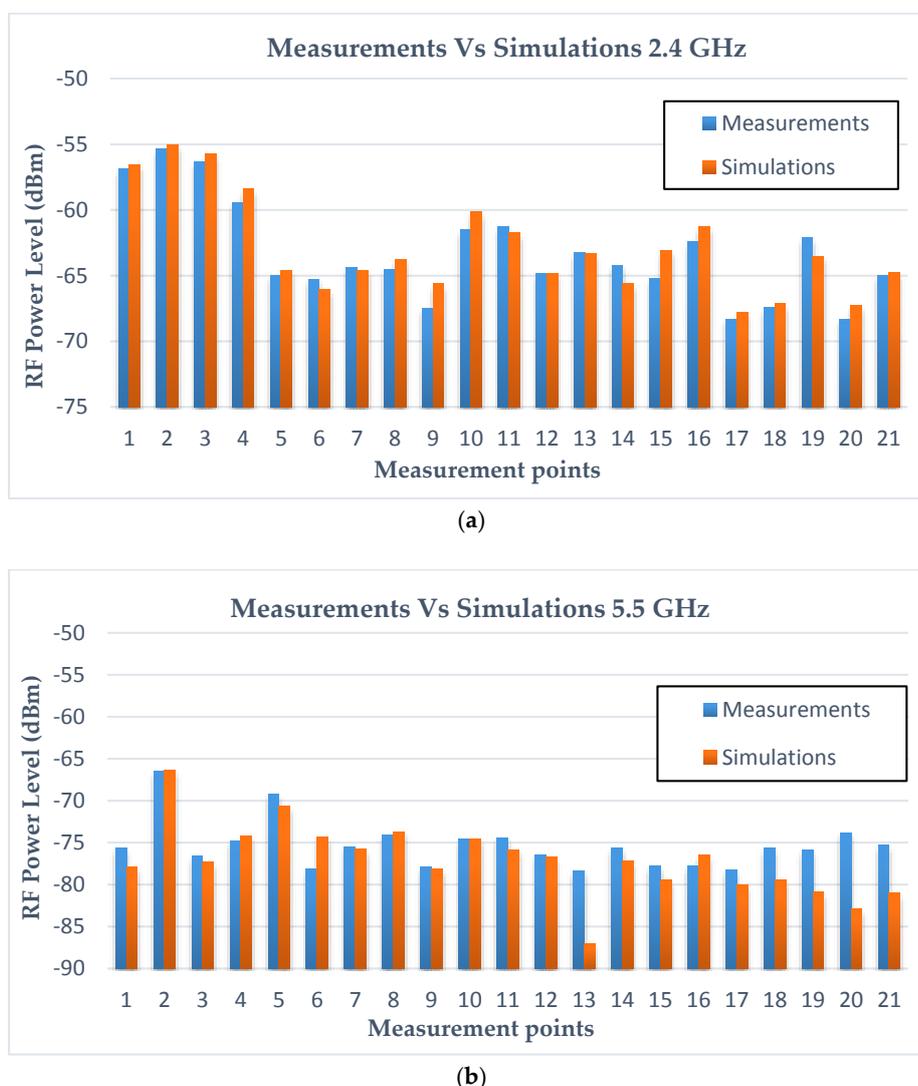


Figure 4. Comparison between measurements and simulations results: (a) 2.4 GHz; (b) 5.5 GHz.

#### 4. Discussion

This paper presents a first assessment of the wireless channel for both 2.4 GHz and 5 GHz operation frequencies. Measurements within the auditorium under analysis show that the environment presents high interference levels at both frequency bands due mainly to the WiFi networks of the auditorium. In order to gain insight in the radio channel behavior, simulations by means of the in-house 3D RL algorithm as well as RF signal propagation measurements have been performed with the aim of studying the viability of deploying WSN/WBAN connected to an AR device (Microsoft HoloLens smart glasses). Future works will consist on the development of applications for the improvement of the autonomy and show experience of impaired people.

**Author Contributions:** conceptualization, I.P. and P.L.-I.; methodology, P.L.-I. and F.F.; software, I.P. and A.V.-B.; validation, I.P., H.K. and A.V.-B.; formal analysis, I.P. and A.V.-B.; investigation, I.P. and P.F.-L.; data curation, P.L.-I.; writing—original draft preparation, I.P.; writing—review and editing, T.M.F.-C. and P.F.-L.;

visualization, I.P. and H.K.; supervision, P.L.-I. and F.F.; project administration, F.F. and T.M.F.-C; funding acquisition, F.F. and T.M.F.-C.

**Funding:** This research and APC was funded by Xunta de Galicia (ED431C 2016-045, ED431G/01) and Project RTI2018-095499-B-C31, Funded by Ministerio de Ciencia, Innovación y Universidades, Gobierno de España (MCIU/AEI/FEDER,UE).

**Acknowledgments:** We thank the staff of Baluarte Congress Center and Auditorium of Navarre for the support for the experiments.

**Conflicts of Interest:** The authors declare no conflict of interest. The funders had no role in the design of the study; in the collection, analyses, or interpretation of data; in the writing of the manuscript, or in the decision to publish the results.

## References

1. World Health Organization (WHO). Available online: <https://www.who.int/news-room/fact-sheets/detail/blindness-and-visual-impairment> (accessed on 8 October 2019)
2. Bai, J.; Liu, Z.; Lin, Y.; Li, Y.; Lian, S.; Liu, D. Wearable Travel Aid for Environment Perception and Navigation of Visually Impaired People. *Electron.* **2019**, *8*, 697.
3. Liang-Bi, C.; Jian-Ping, S.; Ming-Che, C.; Wan-Jung, C.; Ching-Hsiang, Y.; Cheng-You, S. An Implementation of an Intelligent Assistance System for Visually Impaired/Blind People. *IEEE International Conference on Consumer Electronics (ICCE)*, 2019, 1-2.
4. Al-Qutayri, M.; Jeedella, J.; Al-Shamsi, M. An integrated wireless indoor navigation system for visually impaired. *2011 IEEE International Systems Conference* **2011**, 17–23.
5. Murata, M.; Ahmetovic, D.; Sato, D.; Takagi, H.; Kitani, K.M.; Asakawa, C. Smartphone-based Indoor Localization for Blind Navigation across Building Complexes. *2018 IEEE International Conference on Pervasive Computing and Communications (PerCom)* **2018**, 1–10.
6. Microsoft HoloLens Official Web Page. Available online: <https://www.microsoft.com/en-us/hololens> (accessed on 12 October 2019).
7. Fernández-Caramés, T.M.; Fraga-Lamas, P.; Suárez-Albela, M.; Vilar-Montesinos, M. A Fog Computing and Cloudlet Based Augmented Reality System for the Industry 4.0 Shipyard. *Sensors* **2018**, *18*, 1798.
8. Huang, J.; Kinateder, M.; Dunn, M.J.; Jarosz, W.; Yang, X.-D.; Cooper, E.A. An augmented reality sign-reading assistant for users with reduced vision. *PLOS ONE* **2019**, *14*, e0210630.
9. Azpilicueta, L.; Rawat, M.; Rawat, K.; Ghannouchi, F.; Falcone, F. Convergence Analysis in Deterministic 3D Ray Launching Radio Channel Estimation in Complex Environments. *ACES Journal*. **2014**, *29*(4), 256-271.
10. BALUARTE Pamplona - Palacio de Congresos y Auditorio de Navarra. Available online: <http://www.baluarte.com/eng/salas-y-servicios/salas/main-auditorium> (accessed on 10 October 2019).



© 2019 by the authors; licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC-BY) license (<http://creativecommons.org/licenses/by/4.0/>).