

Proceeding Paper

# An Introduction to Atmospheric Pollutant Dispersion Modelling †

Joel B. Johnson

School of Health, Medical & Applied Sciences, Central Queensland University,  
North Rockhampton, QLD 4701, Australia; joel.johnson@cqumail.com

† Presented at 5th International Electronic Conference on Atmospheric Sciences, 16–31 July 2022; Available online: <https://ecas2022.sciforum.net/>.

**Abstract:** Modelling the dispersion of atmospheric pollutants plays an important role in regulatory and epidemiological settings. Although the majority of modelling concepts were developed in the 1980s, a significant amount of optimisation and refinement of dispersion models has occurred since this time. In addition, some completely novel models such as computational fluid dynamics have emerged. Furthermore, next generation models are continually improving the accuracies of the results obtained. This review provides a non-technical outline of the mechanisms of atmospheric pollutant dispersion modelling and discusses common model types and their applications.

**Keywords:** Gaussian model; Eulerian model; computational fluid dynamic (CFD) model; Lagrangian model

## 1. Introduction

With the well-established link between various forms of air pollution and detrimental health conditions including respiratory conditions (Horne et al. 2018; Johannson et al. 2015; Xu et al. 2016), cardiovascular disease (Pope III et al. 2015; Xie et al. 2015; Zhang et al. 2015), cancer (Chen et al. 2016; Gharibvand et al. 2016) and other systemic conditions (Alves et al. 2018; Bernatsky et al. 2016), the importance of maintaining air quality has never been more accentuated. Particularly in light of the continuing decrease in ambient air quality in regions such as East Asia (Geddes et al. 2015), the modelling of atmospheric pollutants plays a vitally important role in guiding regulatory decisions relating to existing and future air quality (Chalabi et al. 2017; Kumar et al. 2016; Sachdeva and Bakshi 2017). In addition to providing the ability to predict (i.e. forecast) pollutant levels at a given timepoint (Forsyth 2014), pollutant modelling allows for specific pollution events to be traced back to their most likely origin (Ling et al. 2017). Amongst the numerous potential uses, this is particularly important for regulatory decision making or planning (Chalabi et al. 2017; Li and Zhang 2014; Po et al. 2019), epidemiological studies (Khreis et al. 2017; Wang et al. 2015) and forensic purposes (i.e. identification of the polluter(s) responsible for an observed reduction in air quality) (Ling et al. 2017; Squizzato and Masiol 2015; Xin et al. 2016). Air quality monitoring also plays an important role in allowing industries to demonstrate their compliance with national air quality standards (Godish et al. 2014).

The choice of pollutant dispersion model plays a key factor in the accuracy of the results obtained (Dezzutti et al. 2018). The available modelling techniques were reviewed by Daly and Zannetti (2007) over a decade ago, and more recently by Barratt (2013) and Colls and Tiwary (2017). In addition, several recent reviews have focussed on the modelling techniques specifically associated with traffic-derived atmospheric pollution (Forehead and Huynh 2018; Khan et al. 2018). However, the technical jargon associated with such reviews may render them unintelligible for the layperson. This review aims to

Academic Editor: Anthony Lupo

Published: 14 July 2022

**Publisher's Note:** MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



**Copyright:** © 2022 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

provide a simple introduction to atmospheric pollutant dispersion modelling in terminology accessible to the uninitiated and outline the currently available models. Particular emphasis is given to models and applications reported over the past five years.

## 2. The Basics of Dispersion Modelling

### 2.1. Data Input

The basic inputs of a pollutant dispersion model include the emission source(s) and pollutant emission levels, meteorological conditions and any changes, topography and any chemical processes (if applicable). A range of possible inputs is given in Table 1.

**Table 1.** Some possible data inputs for a dispersion model.

Emission Characteristics	Source Characteristics	Location Characteristics	Meteorological Characteristics
Pollutants	Source types (e.g. point, line, area, volume)	Location (e.g. urban vs rural)	Temperature
Pollutant characteristics	Source dimensions (if applicable)	Terrain (simple vs complex)	Wind speed
Distribution of source(s)	Volume emission rates	Surface roughness ( $z_0$ )	Wind direction
Emission rates	Temperature	Interfaces of land & water (if any)	Atmospheric stability/turbulence
	Moisture content	Existing (background) pollutant levels	Solar radiation (particularly important for photochemical modelling)
	Presence of buildings or other infrastructure		Cloud cover
			Moisture

### 2.2. Data Processing—The “Black Box”

For many, the model comprises a “black box” wherein the necessary data is entered, the start button is pressed and the outputs consequently analysed. Indeed, with the rising complexity of the models available, it would be impractical for most users to spend the time necessary to gain a complete understanding of the operations of the model they are using.

At the most basic level, atmospheric models comprise one or more mathematical formulae that take into account the input parameters to calculate the concentrations of one or more pollutants at specific locations at any point downwind or downtime. Clearly, the most accurate results would be gained from modelling the trajectory of every pollutant molecule over the simulation period. However, this would require an inordinate amount of processing power. Rather, models must simulate pollutants as a number of discrete components, typically taking either a fixed grid (Eulerian) or trajectory approach. With the fixed grid approach, the area in question is divided into a grid; the air quality within each grid is calculated at each time point based on its previous air quality and that of adjacent grids, taking into account the prevailing meteorological conditions (Godish et al. 2014). In the simpler trajectory approach, the emissions are chunked into either a single block or a number of “puffs”, each comprising a potentially variable (albeit known) amount of pollutant (Cécé et al. 2016). The directional and temporal spread of each puff is then simulated.

In order to do this, processing power is divided among a number of modules, each connected to the core “dispersion” module. Each module simulates a specific aspect within the simulation, such as the identity and concentrations of any pollutants present, any chemical reactions, effects of buildings or terrain, effects of meteorology, plume rise, and deposition of pollutants. Other modules may be added onto a model. For example,

the module PRIME (Plume Rise Model Enhancements) is included in many regulatory dispersion models (e.g. ISC, AERMOD, CALPUFF, TAPM, AUSPLUME), allowing for the prediction of turbulent flow and mixing induced by buildings.

Some models (“reactive models”) also allow for chemical reactions between components to be simulated. This allows for more realistic prediction of the true atmospheric quality, albeit at a higher processor cost. Concentrations of compounds such as CO and SO<sub>2</sub> are often forecast using non-reactive models due to their relative inertness, while the more chemically reactive species NO, NO<sub>2</sub> and O<sub>3</sub> necessitate the use of reactive models (Godish et al. 2014).

### 2.3. Data Output

Although outputs will depend on the specific application to which the model is applied, the most important output is typically the predicted concentrations of specific pollutants at given point(s) surrounding the emission source, at specified points in time.

Before being released to the general public, the outputs of a new pollutant dispersion model will be calibrated against the true pollutant levels across a number of sites, obtained from air quality monitoring stations. Particularly with the rise of cheaper air quality monitoring stations which could be implemented more widely (Cavaliere et al. 2018; Schneider et al. 2017), the validation of dispersion models, both pre- and post-release, is expected to only increase in the future.

### 2.4. Data Analysis

From the data output, an assessment of likely environmental or health effects can then be made. Despite its seeming simplicity, accurate interpretation of the model output is of the utmost concern. If the model results are not interpreted correctly, then there is little point in running the model in the first place.

### 2.5. Simulation Timeframe

Models can either be short-term (hours to days) or long-term (months to years) (Godish et al. 2014; Raffee et al. 2018). Short-term modelling is typically used for predicting pollutant levels under “worst case” scenarios. On the other hand, long-term modelling is often used for epidemiological and atmospheric deposition studies (Godish et al. 2014).

## 3. Box Models

### 3.1. Introduction

Box modelling is one of the earliest and simplest forms of pollutant dispersion modelling. Traditionally, box models found particular use in situations requiring the simulation of chemical interactions between pollutants, as the simplified spatial and temporal dispersion allowed for a greater focus on the chemical aspects.

In a box model, the airshed is assumed to be a simple box of set dimensions, with all emissions released into the box. Once released, the emissions are assumed to be evenly distributed throughout the box. As expected, the accuracy of such a model is quite limited, as shown in comparative studies (Gronwald and Chang 2018). The main advantage of the box model is its simplicity, thus requiring very little processing power and allowing for very fast simulation runtimes. In addition, very little input data are required.

### 3.2. Examples of simple box models

#### EKMA

The model EKMA (Empirical Kinematic Modelling Approach) was used as an early method of assessing the likelihood of photochemical smog formation in urban settings (Carter et al. 1982). In this model, the concentrations of VOCs and NO<sub>x</sub> were assumed to

remain constant from their values measured in the early morning. EKMA is in fact a type of Lagrangian simulation, albeit limited to a box model system (Martinez et al. 1983a; Martinez et al. 1983b). Despite its age, EKMA is still occasionally used for the study of ozone-NO<sub>x</sub>-VOCs relationships in simple settings (Collet et al. 2018; Luo et al. 2018; Su et al. 2018).

### 3.3. Uses

Given their overt simplicity, box models are not commonly used in contemporary regulatory settings except for preliminary assessment purposes (Singh 2018). However, they do retain a place in pollutant dispersion modelling, particularly in small anthropogenic enclosed spaces. For example, Lin et al. (2017) applied a box model to investigate the disappearance of formaldehyde from indoor air spaces via photodegradation. Given the relatively small air spaces indoors coupled with the frequent lack of ventilation to the outdoor environment, the use of a box model is quite appropriate in such circumstances. Nevertheless, more complicated models have also been applied to the indoor environment (Mocho et al. 2017).

Modified versions of the box model, such as a two-box model, have been utilised in modelling photochemical pollutant levels in street canyons (i.e. a street enclosed by tall buildings on each side) (Zhong et al. 2015; Zhong et al. 2016), amongst other uses (Jensen et al. 2018). Many other models designed specifically for street canyons are based off the box model, albeit typically modelling each street as an individual box. Examples include the STREET and STREET-BOX models (Johnson et al. 1973; Mensink and Lewyckyj 2001).

## 4. Eulerian Models

### 4.1. Introduction

Eulerian models take a strictly mathematical approach to pollution modelling. The area of study is divided into a number of grid cells, both horizontally and vertically, and the average pollutant concentration within each cell is calculated at each time point. Eulerian dispersion modelling was introduced by Reynolds et al. (1973). Although initially used for modelling time periods of only a few days per simulation, more recent versions may be used for longer periods of time.

As Eulerian models are based on the average grid concentrations rather than following an entire plume, they easily account for removal of the constituent particles through deposition or chemical reactions (Ničeno et al. 2008).

### 4.2. Examples

#### 4.2.1. TAPM

The Air Pollution Model (TAPM), developed by CSIRO (Hurley et al. 2005), is unusual for a dispersion model in that it can use either a Eulerian grid or Lagrangian particle model to calculate dispersion (Hurley 2008). The latter is considered to be more accurate at locations close to the emission source. Another remarkable aspect is its ability to extract meteorological conditions from synoptic charts (past, present or forecast). Surface measurements can also be incorporated.

TAPM functions particularly well in complex situations, such as locations with a sea breeze or complex terrain (Matthaios et al. 2018). The incorporated prognostic meteorological model has also been used to provide meteorological input data for other dispersion models (Bang et al. 2019; Trieu et al. 2015). As expected for a mathematical-based simulation, TAPM is quite computationally intensive.

Recent applications of TAPM include use in a complex, mountainous terrain (Matthaios et al. 2018), modelling of heavy metal deposition around a copper smelter (Pollard et al. 2015) and evaluation of health risks resulting from VOC emissions from municipal waste (Sarkhosh et al. 2017).

#### 4.2.2. Variable K-Theory Model

A Eulerian Variable K-Theory model has been found to provide the highest accuracy compared to box, Gaussian plume and Lagrangian models, when simulating NO<sub>2</sub> and SO<sub>2</sub> concentrations across 17 sites (Gronwald and Chang 2018).

### 5. Gaussian Models

#### 5.1. Introduction

Based off the assumption that plume spread is due to the diffusion of the constituent pollutants, Gaussian models take the pollutant concentrations to follow a normal (Gaussian) distribution in both the horizontal and vertical aspects (Godish et al. 2014), as determined through experimental measurements of plume spread (Nieuwstadt and van Dop 1982). These models have been in regulatory use in the USA for almost 60 years (Godish et al. 2014). Gaussian plume models assume the pollutants are emitted at a continuous rate, modelling the pollutants as a single, continuous plume (Figure 1). Gaussian plumes expand in two dimension over time (y and z). Gaussian plume models require the following assumptions: the emission and meteorological conditions must remain constant, no chemical transformations occur, and wind speeds always equal or exceed 1 m s<sup>-1</sup> (Godish et al. 2014).

Inputs include factors such as the pollutant release rate, release height, wind speed (at the reference height; often the height of emissions release), mixing/inversion height, and the horizontal and vertical dispersion factors. In addition, rising or sinking of the plume may be modelled. When the plume reaches the ground or the upper boundary layer of air, it is assumed to reflect quantitatively from these surfaces. Over time, this may lead to the false appearance of pollutants accumulating at ground level, which can be accounted for in the model (Godish et al. 2014). Further detail surrounding the mathematical calculations underlying Gaussian models is presented by Godish et al. (2014), hence will not be discussed in detail here.

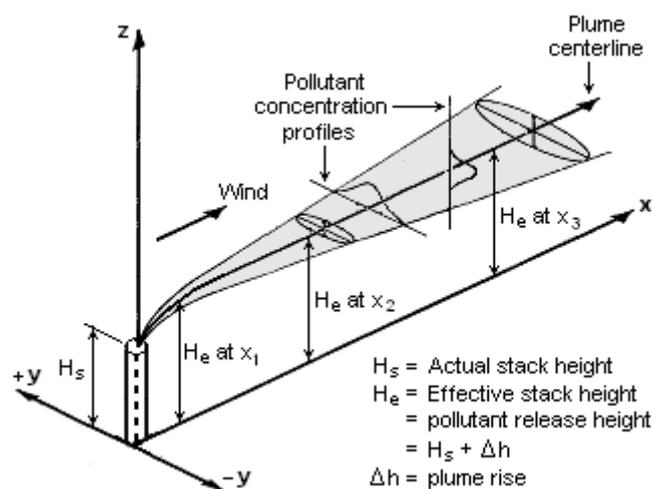


Figure 1. A representation of a Gaussian plume model. Image by Milton Beychok; reproduced under Creative Commons 3.0 licence.

## 5.2. Gaussian Plume Models

### 5.2.1. AEOLIUSF

AEOLIUSF (Assessing the Environmental Of Locations In Urban Streets Full version) is designed for modelling dispersion in urban street canyons (Barratt 2013; Buckland 1998). Compared to other street models, AEOLIUS/AEOLIUSF is not as commonly used in contemporary settings. Its accuracy is middle-of-the-range, being higher than STREET models but lower than SEUS models (Dezzutti et al. 2018).

### 5.2.2. AERMOD

AERMOD superseded the ISC model as the preferred Gaussian plume model of the US EPA (Environmental Protection Agency [EPA] 2019). From the meteorological conditions, terrain and upper atmospheric conditions entered, a single wind field is calculated and used in the simulation, while the terrain, elevation, surface roughness and land use is used to calculate factors such as the turbulence, stability class and Monin-Obukhov length (a continuous measure of near-surface atmospheric stability) (Daly and Zannetti 2007). AERMOD is suitable for ground or elevated sources, and both simple and complex terrain (EPA 2019). AERMOD is unsuitable for modelling when the wind speed is zero (Goldstone 2015).

Contemporary applications of AERMOD include assessing complex industrial emissions (Gulia et al. 2015), modelling emissions from cement factories (Jayadipraja et al. 2016; Yazdi et al. 2016) and gas-fired power plants (Singh et al. 2016), and predicting near-road pollutant levels (Askariyeh et al. 2017). In particular, pollutant sources surrounded by complex terrain are often modelled via AERMOD (ul Haq et al. 2019).

### 5.2.3. AUSPLUME

This model is often used in Australia and New Zealand. Its level of detail is believed to be a little lower than AERMOD; however, AUSPLUME can be used in modelling situations where the wind speed is zero (Goldstone 2015).

Recent applications of this model include mapping the dispersion of radon released from a Romanian uranium mine (Madear et al. 2018) and modelling odour dispersion from rubber factories in Malaysia (Idris et al. 2017).

### 5.2.4. CALINE3

CALINE is a modified Gaussian plume model, where the emission source is a line rather than a point (Benson 1992). Its main use is in modelling pollutant dispersion from roads; the road geometry can be varied rather than being restricted to a straight line. CALINE3 remains an EPA-recommended Gaussian line model (EPA 2019), while the updated CALINE4 model is also used in some contemporary applications (Majumder 2019). CALINE3 is designed for relatively simple terrain and forms the basis of models such as CAL3QHC and CAL3QHCR (EPA 2019).

(Majumder 2019) used CALINE4, combined with ISCST3, to predict NO<sub>2</sub> and PM<sub>10</sub> concentrations along a road line source.

### 5.2.5. CAL3QHC and CAL3QHCR

Both models are based off CALINE3, but are specifically designed for determining the build-up of CO hotspots resulting from traffic stagnation, particularly at intersections (EPA 2019). CAL3QHCR is the “refined” version of CAL3QHC and consequently requires a greater data input, in particular localised meteorological data (EPA 2019).

In recent years, CAL3QHC has been applied to the epidemiological study of the congenital effects of vehicular pollutants (Beamer et al. 2015) and assessing the spread of CO, NO<sub>x</sub> and VOCs from intersections in India (Dhyani et al. 2019).

### 5.2.6. CTDMPPLUS

As suggested by its name, Complex Terrain Dispersion Model Plus Algorithms for Unstable Situations (CTDMPLUS) is designed for use in complex terrain situations (Perry 1992). However, it can be used in all stability conditions (including stable and neutral conditions) (EPA 2019). From a review of the literature, it does not appear to be commonly used in contemporary settings.

### 5.2.7. ISC

The ISC (Industrial Source Complex) model, as reported and evaluated by Bowers et al. (1981), was previously the approved Gaussian plume model of the US Environmental Protection Agency (EPA) (Daly and Zannetti 2007). Recent applications of the ISC model include modelling VOCs downwind of a petrochemical manufacturing plant (Chen et al. 2015) and monitoring a number of pollutants (CO, VOC, NO<sub>x</sub> and PM<sub>10</sub>) in Italian agricultural land (Iodice and Senatore 2015a; Iodice and Senatore 2015b). Some authors also combine the ISC model with AEROMOD for improved accuracy of the results (Esbrí et al. 2015; Roy et al. 2016).

### 5.2.8. OCD

The Offshore and Coastal Dispersion (OCD) model is a straight-line Gaussian model, designed for predicting the dispersion of pollutants over marine or coastal regions (EPA 2019). Changes as the plume crosses the coastline are incorporated (EPA 2019). This model has been used across a range of environments, including the Gulf of Mexico (Muriel-García et al. 2016).

## 6. Lagrangian Models

### 6.1. Introduction

Lagrangian models simulate a number of “puffs” of pollutants emitted from the source, usually at regular intervals. The most common is a “Gaussian puff” model, where each puff is assumed to follow a Gaussian distribution as it moves downwind and expands. The puffs are 3D elements that expand in all dimensions (x, y and z) over time, concurrently moving downwind from the emission source. A model may comprise hundreds to hundreds of thousands of these theoretical puffs (Daly and Zannetti 2007). As each puff is treated independently, they can have varying rates of dispersion and move in various directions, allowing for more realistic modelling of local conditions within the simulation. Another related model of this type is the Lagrangian random walk model, where the plume is discretised as numerous independent tracer particles. The particles are transported by the mean wind field with local turbulence accounted for using a stochastic ‘random walk’ algorithm. In particular, Lagrangian models show improved accuracy in models with complex topography or flow patterns (e.g. recirculation of the pollutants) and temporal variation in emissions or meteorology.

Lagrangian models are often used for modelling across longer distances and timeframes (up to several years long) (Daly and Zannetti 2007). In contrast, Gaussian plume models are typically restricted to predictions up to 50 km from the point source (Godish et al. 2014). The field of Lagrangian modelling was introduced by Rodhe (1972); Rodhe (1975) and has gathered momentum rapidly since that time.

Time steps of between 1 and 180 seconds may be used (Inthavong et al. 2016; Sachdeva and Baksi 2017). As with Gaussian plume modelling, the assumption of complete pollutant reflection from the ground and upper atmospheric boundary layer may result in misleading conclusions unless this is taken into account (Boughton et al. 1987; Monin 1959).

## 6.2. Examples

### 6.2.1. AFTOX

The AFTOX (Air Force Toxic) chemical dispersion model was created by Kunkel (1988). It assumes that four Gaussian puffs are released from the source every minute. As it does not account for decay or settling of the pollutants, AFTOX often provides higher pollutant concentrations and a lower accuracy compared to other model types (Gronwald and Chang 2018). AFTOX is restricted to neutrally buoyant gases, but is particularly useful for modelling liquid spills which subsequently evaporate (Abbasi et al. 2017).

AFTOX was recently used as the basis for modelling investigating the relationship between raindrop size and the scavenging efficiency of aerosol particles (Elperin et al. 2016).

### 6.2.2. CALPUFF

CALPUFF is the approved long-range (>80 km) atmospheric emissions model of the US EPA (Daly and Zannetti 2007). However, CALPUFF also finds use in short-range simulations with complex surface topography (Tomasi et al. 2016), being widely used as a regulatory model in Australian and New Zealand. CALPUFF is versatile at both short-range and long-range simulations (Daly and Zannetti 2007). With more recent software such as VISTAS version 6, CALPUFF can be run at timescales of less than one hour (Exponent Engineering and Science Consulting 2019).

Applications include the modelling of odour dispersion (Çetin Doğruparmak et al. 2018; Yaacof et al. 2017), dispersion of various pollutants produced by industrial facilities (Gulia et al. 2015) and in the study of shipping emissions in a Western Australian port (Formentin 2017). One application of particular note was the modelling of atmospheric mercury released from a coal-fired power plant in Mexico (García et al. 2017). Numerous studies have also utilised CALPUFF in modelling dispersion over complex terrain (Sagan et al. 2018; Tomasi et al. 2016).

### 6.2.3. Hybrid Eulerian-Lagrangian Dispersion Models (HDMs)

Hybrid models combining the Eulerian and Lagrangian methods, as outlined by André (1990), remain relatively common, particularly for simulating dispersion close to point-line sources (Sachdeva and Baksi 2017). The emissions are initially modelled as puffs using the Lagrangian method, then after travelling a specified distance or expanding to a specified level, the puffs are assumed to approximate a volume emission. The Eulerian method then takes over to calculate the long-range pollutant dispersal (Sachdeva and Baksi 2017). The major advantage of this method is the reduction in required processing power compared to using a Lagrangian model at all scales (Sachdeva and Baksi 2017).

Hybrid models have been used in complex environments such as complex urban (Bahlali et al. 2017) and mixed industrial-residential environments (Bonafé et al. 2018), and in combination with CFD modelling to predict PM<sub>10</sub> levels (Brusca et al. 2016) and other pollutants (Bahlali et al. 2018) in complex scenarios.

## 7. Computational Fluid Dynamics Models

### 7.1. Introduction

Computational fluid dynamics (CFD) has been a well-established modelling technique in engineering disciplines for many years. However, it is only relatively recently that it was turned toward the application of modelling atmospheric pollutants. CFD is based off Navier-Stokes equations, which are 3-dimensional, unsteady, non-linear, partial-differential equations that can exactly model the flow of atmospheric gases. The number of unknowns exceeds the number of discretised equations, hence different techniques are used to model unknown turbulence terms to find a solution. A Lagrangian or Eulerian framework is incorporated into the model in order to calculate the transport and dispersion of contaminants through the atmosphere. Depending on the

fidelity and resolution of the simulation, CFD models can require very large amounts of computing power.

There are three major classes of CFD models: Reynolds-Averaged Navier Stokes (RANS), Large Eddy Simulation (LES) and Direct Numerical Simulation (DNS).

### 7.2. Examples and Uses

Brown et al. (2013) compared the Quick Urban and Industrial Complex (QUIC) dispersion model, based off empirical parameterizations of the flow around and between buildings in order to model wind flow in an urban environment. Although the results of the model provided a similar accuracy to standard CFD modelling in this instance, the advantage of CFD models is that wind flow through novel building configurations and/or combinations can be simulated, rather than relying on empirical data.

Mocho et al. (2017) used a CFD model to investigate the movement of formaldehyde in an indoor setting. As expected, the accuracy of the results was improved over a simple box model.

CFD has been used for modelling the near-field dispersion of pollutants, when plumes of varying buoyancies were present (Tominaga and Stathopoulos 2018). Other uses include the modelling of PM<sub>10</sub> movement (Brusca et al. 2016) and the movement of reactive chemical components (Sanchez et al. 2016).

## 8. Street Network Models

### 8.1. Introduction

The street network model is currently the least utilised contemporary modelling technique (Soulhac et al. 2017). This method, designed for the analysis of vehicle emissions in built-up urban environments, typically treats each street as a line source of emissions, with the quantity of emissions calculated from the traffic volume along that street.

### 8.2. Examples

#### 8.2.1. SIRANE

The SIRANE model, developed by Soulhac et al. (2011), is specifically designed for modelling pollutant dispersal from traffic in urban regions. To date, it is the main street network model reported in the literature (Soulhac et al. 2017). Each street is modelled as a box, with transfer of pollutants occurring along the box (i.e. along the street), between boxes (at street intersections) and between boxes and the atmospheric boundary layer (Soulhac et al. 2011). Atmospheric conditions may change hourly, but are assumed to be constant in between these timepoints. The model has been validated against wind tunnel data (Salem et al. 2015) and against a year of NO<sub>2</sub> emissions data (Soulhac et al. 2017). However, work by Wang et al. (2016) has suggested that the output of SIRANE shows a poor correlation with near-road NO<sub>2</sub> concentrations, but better correlation with the average NO<sub>2</sub> values. Nevertheless, SIRANE has been used in several epidemiological studies, particularly in France (Morelli et al. 2016; Ouidir et al. 2015; Padilla et al. 2016).

Derivative street pollution models have been created based off SIRANE, including MUNICH (Model of Urban Network of Intersecting Canyons and Highways), which utilises a grid modelling method (Kim et al. 2018).

## 9. Other Models

Specialised models are available for modelling pollutant dispersion over long ranges, in complex terrain, and for photochemically reactive pollutants (Godish et al. 2014). One example is the Operational Street Pollution Model (OSPM) for modelling the chemistry of photochemical smog formation (Hertel et al. 1991; Wang et al. 2016). Other common photochemical models include CMAQ (Community Multiscale Air Quality), CAMx (Comprehensive Air quality Model with extensions), UAM (Urban Airshed Model®) and CALGRID (Daly and Zannetti 2007). Of particular note are CAMx, an open-source model

(Ciarelli et al. 2016), and UAM, the most widely used photochemical air quality model (Daly and Zannetti 2007).

Statistical models are available for the short-term forecasting of air quality, based off recent and current air quality measurements (Finzi and Nunnari 2005). Such models do not seek to establish cause and effect, rather solely aiming to link patterns in emission trends to the air quality (Daly and Zannetti 2007). In a similar fashion, machine-learning algorithms have also been trialled for the prediction of O<sub>3</sub>, NO<sub>2</sub> and SO<sub>2</sub> concentrations (Shaban et al. 2016).

Due in part to the short lifespan and unique properties of odorous compounds, air quality models specifically designed for predicting the dispersion of such compounds are available (Daly and Zannetti 2007), such as ModOdor (Liu et al. 2019).

## 10. Conclusions

Atmospheric pollutant dispersion models have played an enormous role in setting and regulating atmospheric emission levels and have likely played a vital role in the improvement in air quality observed across many westernised countries over the past few decades. With new applications and models reported on a weekly basis, the emissions modeller is faced with a baffling array of models to choose from. However, a basic understanding of the mechanisms behind each model and the strengths and limitations of each should assist in guiding this choice. Particularly with advances in computer processing power and simulation abilities, the results produced by atmospheric pollutant dispersion models are more detailed and accurate than ever before. It is hoped that regulatory bodies will be able to utilise this accuracy in such a way that the world's air quality continues to improve over the coming years.

### Funding:

### Institutional Review Board Statement:

### Informed Consent Statement:

### Data Availability Statement:

**Conflicts of Interest:** The author declares that no conflicts of interest exist.

## References

1. Abbasi, T.; Tauseef, S.; Suganya, R.; Abbasi, S. Types of accidents occurring in chemical process industries and approaches to their modeling. *Int. J. Eng. Sci. Math* **2017**, *6*, 424–455.
2. Alves, A.G.F.; et al. Influence of air pollution on airway inflammation and disease activity in childhood-systemic lupus erythematosus. *Clin. Rheumatol.* **2018**, *37*, 683–690.
3. Andr n, A. A meso-scale plume dispersion model. Preliminary evaluation in a heterogeneous area. *Atmos. Environ. Part A Gen. Top.* **1990**, *24*, 883–896.
4. Askariyeh, M.H.; Kota, S.H.; Vallamsundar, S.; Zietsman, J.; Ying, Q. AERMOD for near-road pollutant dispersion: Evaluation of model performance with different emission source representations and low wind options *Transp. Res. Part D: Transp. Environ.* **2018**, *57*, 392–402.
5. Bahlali, M.; Dupont, E.; Carissimo, B. Adaptation of the Lagrangian module of a CFD code for atmospheric dispersion of pollutants in complex urban geometries and comparison with existing Eulerian results. 2017.
6. Bahlali, M.L.; Dupont, E.; Carissimo, B. A hybrid CFD RANS/Lagrangian approach to model atmospheric dispersion of pollutants in complex urban geometries International. *J. Environ. Pollut.* **2018**, *64*, 74–89.
7. Bang, H.Q.; Nguyen, H.D.; Vu, K.; Hien, T.T. Photochemical Smog Modelling Using the Air Pollution Chemical Transport Model (TAPM-CTM) in Ho Chi Minh City. *Vietnam Environ. Modeling Assess.* **2019**, *24*, 295–310.
8. Barratt, R. *Atmospheric Dispersion Modelling: An Introduction to Practical Applications*; Routledge: 2013.
9. Beamer, P.I.; et al. B46 HEALTH EFFECTS OF AIR POLLUTION AND NANOPARTICLES: Childhood Cc16 Levels Are Associated With Diesel Exposure At Birth. *Am. J. Respir. Crit. Care Med.* **2015**, *191*, 1.
10. Benson, P.E. A review of the development and application of the CALINE3 and 4 models. *Atmos. Environ. Part B Urban Atmos.* **1992**, *26*, 379–390.
11. Bernatsky, S.; et al. Fine particulate air pollution and systemic autoimmune rheumatic disease in two Canadian provinces. *Environ. Res.* **2016**, *146*, 85–91.

12. Bonafé, G.; Montanari, F.; Stel, F. A hybrid Eulerian-Lagrangian-statistical approach to evaluate air quality in a mixed residential-industrial environment. *Int. J. Environ. Pollut.* **2018**, *64*, 246–264.
13. Boughton, B.; Delaurentis, J.; Dunn, W. A stochastic model of particle dispersion in the atmosphere. *Bound. Layer Meteorol.* **1987**, *40*, 147–163.
14. Bowers, J.; Anderson, A.J.; Huber, A. Evaluation study of the industrial source complex (ISC) dispersion model. Paper 81.20. 4. In Proceedings of the Annual Meeting, Air Pollution Control Association, Philadelphia, PA, USA, 21 June 1981.
15. Brown, M.J.; Gowardhan, A.A.; Nelson, M.A.; Williams, M.D.; Pardyjak, E.R. QUIC transport and dispersion modelling of two releases from the Joint Urban 2003 field experiment International. *J. Environ. Pollut.* **2013**, *52*, 263–287.
16. Brusca, S.; Famoso, F.; Lanzafame, R.; Mauro, S.; Messina, M.; Strano, S. PM10 Dispersion Modeling by means of CFD 3D and Eulerian–Lagrangian models: Analysis and comparison with experiments. *Energy Procedia* **2016**, *101*, 329–336.
17. Buckland, A. Validation of a street canyon model in two cities. *Environ. Monit. Assess.* **1998**, *52*, 255–267.
18. Carter, W.P.; Winer, A.M.; Pitts, J.N., Jr. Effects of kinetic mechanisms and hydrocarbon composition on oxidant-precursor relationships predicted by the EKMA isopleth technique. *Atmos. Environ.* **1982**, *16*, 113–120.
19. Cavaliere, A.; et al. Development of Low-Cost Air Quality Stations for Next Generation Monitoring Networks: Calibration and Validation of PM2.5 and PM10 Sensors. *Sensors* **2018**, *18*, 2843.
20. Cécé, R.; Bernard, D.; Brioude, J.; Zahibo, N. Microscale anthropogenic pollution modelling in a small tropical island during weak trade winds: Lagrangian particle dispersion simulations using real nested LES meteorological fields. *Atmos. Environ.* **2016**, *139*, 98–112.
21. Doğruparmak, Ş.Ç.; Pekey, H.; Arslanbaş, D. Odor dispersion modeling with CALPUFF: Case study of a waste and residue treatment incineration and utilization plant in Kocaeli, Turkey. *Environ. Forensics* **2018**, *19*, 79–86.
22. Chalabi, Z.; et al. Applying air pollution modelling within a multi-criteria decision analysis framework to evaluate UK air quality policies Atmospheric environment **2017**, *167*, 466–475.
23. Chen, M.-H.; Yuan, C.-S.; Wang, L.-C. A feasible approach to quantify fugitive VOCs from petrochemical processes by integrating open-path fourier transform infrared spectrometry measurements and industrial source complex (ISC) dispersion model. *Aerosol Air Qual. Res.* **2015**, *15*, 1110–1117.
24. Chen, X.; et al. Long-term exposure to urban air pollution and lung cancer mortality: A 12-year cohort study in Northern China. *Sci. Total Environ.* **2016**, *571*, 855–861.
25. Ciarelli, G.; et al. Evaluation of European air quality modelled by CAMx including the volatility basis set scheme. *Atmos. Chem. Phys.* **2016**, *16*, 10313–10332.
26. Collet, S.; Kidokoro, T.; Karamchandani, P.; Shah, T. Future-Year Ozone Isopleths for South Coast, San Joaquin Valley, and Maryland. *Atmosphere* **2018**, *9*, 354.
27. Colls, J.; Tiwary, A. *Air Pollution: Measurement, Modelling and Mitigation*; CRC Press: 2017.
28. Daly, A.; Zannetti, P. Air pollution modeling—An overview. In *Ambient Air Pollution*; Zannetti, P., Al-Ajmi, D., Al-Rashied, S., Eds.; The Arab School for Science and Technology (ASST) and The EnviroComp Institute: 2007; pp 15–28.
29. Dezzutti, M.; Berri, G.; Venegas, L. Intercomparison of Atmospheric Dispersion Models Applied to an Urban Street Canyon of Irregular Geometry. *Aerosol Air Qual. Res.* **2018**, *18*, 820–828.
30. Dhyani, R.; Sharma, N.; Advani, M. Estimation of fuel loss and spatial-temporal dispersion of vehicular pollutants at a signalized intersection in Delhi City, India. *WIT Trans. Ecol. Environ.* **2019**, *236*, 233–243.
31. Elperin, T.; Fominykh, A.; Krasovtsov, B. Effect of raindrop size distribution on scavenging of aerosol particles from Gaussian air pollution plumes and puffs in turbulent atmosphere. *Process Saf. Environ. Prot.* **2016**, *102*, 303–315.
32. EPA. Air Quality Dispersion Modeling—Preferred and Recommended Models. US Government. Available online: <https://www.epa.gov/scram/air-quality-dispersion-modeling-preferred-and-recommended-models> (accessed on 15 October 2019).
33. Esbrí, J.M.; López-Berdonces, M.A.; Fernández-Calderón, S.; Higuera, P.; Díez, S. Atmospheric mercury pollution around a chlor-alkali plant in Flix (NE Spain): An integrated analysis. *Environ. Sci. Pollut. Res.* **2015**, *22*, 4842–4850.
34. Exponent Engineering and Science Consulting. CALPUFF Modeling System. Available online: <http://www.src.com/> (accessed on).
35. Finzi, G.; Nunnari, G. *Air Quality Forecast and Alarm Systems*; Chapter 16A; Zannetti, P., Ed.; Air Quality Modeling: 2005; Volume II.
36. Forehead, H.; Huynh, N. Review of modelling air pollution from traffic at street-level-The state of the science. *Environ. Pollut.* **2005**, *241*, 775–786.
37. Formentin, G. *Estimating the Dispersion of Shipping Emissions from Fremantle Port, Western Australia*; Murdoch University: 2017.
38. Forsyth, T. Public concerns about transboundary haze: A comparison of Indonesia, Singapore, and Malaysia. *Glob. Environ. Change* **2014**, *25*, 76–86.
39. García, G.F.; Álvarez, H.B.; Echeverría, R.S.; de Alba, S.R.; Rueda, V.M.; Dosantos, E.C.; Cruz, G.V. Spatial and temporal variability of atmospheric mercury concentrations emitted from a coal-fired power plant in Mexico. *J. Air Waste Manag. Assoc.* **2017**, *67*, 973–985.
40. Geddes, J.A.; Martin, R.V.; Boys, B.L.; van Donkelaar, A. Long-term trends worldwide in ambient NO<sub>2</sub> concentrations inferred from satellite observations. *Environ. Health Perspect.* **2015**, *124*, 281–289.

41. Gharibvand, L.; Shavlik, D.; Ghamsary, M.; Beeson, W.L.; Soret, S.; Knutsen, R.; Knutsen, S.F. The association between ambient fine particulate air pollution and lung cancer incidence: Results from the AHSMOG-2 study. *Environmental health perspectives* **2016**, *125*, 378–384.
42. Godish, T.; Davis, W.T.; Fu, J.S. *Air Quality*; CRC Press: Boca Raton, FL, USA, 2014.
43. Goldstone, M. AERMOD: Assessment of meteorological files and comparison with Ausplume for Area Source Modelling. *Air Qual. Clim. Change* **2015**, *49*, 38.
44. Gronwald, F.; Chang, S.-Y. Evaluation of the Precision and Accuracy of Multiple Air Dispersion Models. *J. Atmos. Pollut.* **2018**, *6*, 1–11.
45. Gulia, S.; Kumar, A.; Khare, M. Performance evaluation of CALPUFF and AERMOD dispersion models for air quality assessment of an industrial complex. 2015.
46. Hertel, O.; Berkowicz, R.; Larssen, S. The operational street pollution model (OSPM). In *Air Pollution Modeling and Its Application VIII*; Springer: Berlin/Heidelberg, Germany, 1991; pp 741–750.
47. Horne, B.D.; et al. Short-term elevation of fine particulate matter air pollution and acute lower respiratory infection. *Am. J. Respir. Crit. Care Med.* **2018**, *198*, 759–766.
48. Hurley, P. Development and verification of TAPM. In *Air Pollution Modeling and Its Application XIX*; Springer: Berlin/Heidelberg, Germany, 2008; pp 208–216.
49. Hurley, P.J.; Edwards, M.; Physick, W.L.; Luhar, A.K. TAPM V3-model description and verification. *Clean Air Environ. Qual.* **2005**, *39*, 32.
50. Idris, N.; Kamarulzaman, N.; Nor, Z.M. Odour Dispersion Modelling for Raw Rubber Processing Factories. *J. Rubber Res.* **2017**, *20*, 223–241.
51. Inthavong, K.; Tian, L.; Tu, J. Lagrangian particle modelling of spherical nanoparticle dispersion and deposition in confined flows. *J. Aerosol Sci.* **2016**, *96*, 56–68.
52. Iodice, P.; Senatore, A. Air pollution and air quality state in an Italian National Interest Priority Site. Part 2: The pollutant dispersion. *Energy Procedia* **2015**, *81*, 637–643.
53. Iodice, P.; Senatore, A. Appraisal of pollutant emissions and air quality state in a critical Italian region: Methods and results. *Environ. Prog. Sustain. Energy* **2015**, *34*, 1497–1505.
54. Jayadiprāja, E.; Daud, A.; Assegaf, A.; Maming, M. The application of the AERMOD model in the environmental health to identify the dispersion area of total suspended particulate from cement industry stacks. *J. Res. Med. Sci.* **2016**, *4*, 2044–2049.
55. Jensen, A.; et al. Comparison of geometrical layouts for a multi-box aerosol model from a single-chamber dispersion study. *Environments* **2018**, *5*, 52.
56. Johannson, K.A.; Balmes, J.R.; Collard, H.R. Air pollution exposure: A novel environmental risk factor for interstitial lung disease? *Chest* **2015**, *147*, 1161–1167.
57. Johnson, W.; Ludwig, F.; Dabberdt, W.; Allen, R. An urban diffusion simulation model for carbon monoxide. *J. Air Pollut. Control Assoc.* **1973**, *23*, 490–498.
58. Khan, J.; Ketzler, M.; Kakosimos, K.; Sørensen, M.; Jensen, S.S. Road traffic air and noise pollution exposure assessment—A review of tools and techniques. *Sci. Total Environ.* **2018**, *634*, 661–676.
59. Khreis, H.; Kelly, C.; Tate, J.; Parslow, R.; Lucas, K.; Nieuwenhuijsen, M. Exposure to traffic-related air pollution and risk of development of childhood asthma: A systematic review and meta-analysis. *Environ. Int.* **2017**, *100*, 1–31.
60. Kim, Y.; Wu, Y.; Seigneur, C.; Roustan, Y. Multi-scale modeling of urban air pollution: Development and application of a Street-in-Grid model (v1. 0) by coupling MUNICH (v1. 0) and Polair3D (v1. 8.1). *Geosci. Model Dev.* **2018**, *11*, 611–629.
61. Kumar, A.; Patil, R.S.; Dikshit, A.K.; Islam, S.; Kumar, R. Evaluation of control strategies for industrial air pollution sources using American Meteorological Society/Environmental Protection Agency Regulatory Model with simulated meteorology by Weather Research and Forecasting Model. *J. Clean. Prod.* **2016**, *116*, 110–117.
62. Kunkel, B. *User's Guide for the Air Force Toxic Chemical Dispersion Model (AFTOX). Interim Report, October 1985–December 1987*; Air Force Geophysics Lab.: Hanscom AFB, MA, USA, 1988.
63. Li, M.; Zhang, L. Haze in China: Current and future challenges. *Environ. Pollut.* **2014**, *189*, 85–86.
64. Lin, M.-W.; Jwo, C.-S.; Ho, H.-J.; Chen, L.-Y. Using box modeling to determine photodegradation coefficients describing the removal of gaseous formaldehyde from indoor air. *Aerosol Air Qual. Res.* **2017**, *17*, 330–339.
65. Ling, Z.; Zhao, J.; Fan, S.; Wang, X. Sources of formaldehyde and their contributions to photochemical O<sub>3</sub> formation at an urban site in the Pearl River Delta, southern China. *Chemosphere* **2017**, *168*, 1293–1301.
66. Liu, Y.; Zhao, Y.; Lu, W.; Wang, H.; Huang, Q. ModOodor: 3D numerical model for dispersion simulation of gaseous contaminants from waste treatment facilities. *Environ. Model. Softw.* **2019**, *113*, 1–19.
67. Luo, H.; Yuan, Z.; Zheng, J.; Duan, Y. Source-based dynamic control strategies of ozone in different functional areas in Shanghai, China. In *EGU General Assembly Conference Abstracts*; 2018. p 3237.
68. Madear, G.; Traista, E.; Pop, I. Radon dispersion air modeling in Banat mining area. In *Mine Planning and Equipment Selection 2000*; Routledge: 2018; pp 919–924.
69. Majumder, S. Emission load distribution and prediction of NO<sub>2</sub> and PM<sub>10</sub> using ISCST3 and CALINE4 line source modeling. *Appl. J. Environ. Eng. Sci.* **2019**, *5*, 2121–2135.
70. Martinez, J.; Maxwell, C.; Javitz, H.; Bowol, R. *Evaluation of the Empirical Kinetic Modeling Approach (EKMA)*; NTIS: Springfield, VA, USA, 1983; Volume 133.

71. Martinez, J.R.; Maxwell, C.; Javitz, H.S.; Bawol, R. Performance evaluation of the Empirical Kinetic Modeling Approach (EKMA). In *Air Pollution Modeling and Its Application II*; Springer: Berlin/Heidelberg, Germany, 1983; pp 199–211.
72. Matthaios, V.N.; Triantafyllou, A.G.; Albanis, T.A.; Sakkas, V.; Garas, S. Performance and evaluation of a coupled prognostic model TAPM over a mountainous complex terrain industrial area. *Theor. Appl. Climatol.* **2018**, *132*, 885–903.
73. Mensink, C.; Lewycky, N. A simple model for the assessment of air quality in streets. *Int. J. Veh. Des.* **2001**, *27*, 242–250.
74. Mocho, P.; Desauziers, V.; Plaisance, H.; Sauvat, N. Improvement of the performance of a simple box model using CFD modeling to predict indoor air formaldehyde concentration. *Build. Environ.* **2017**, *124*, 450–459.
75. Monin, A. Smoke propagation in the surface layer of the atmosphere. In *Advances in Geophysics*; Elsevier: Amsterdam, The Netherlands, 1959; Volume 6, pp 331–343.
76. Morelli, X.; Rieux, C.; Cyrus, J.; Forsberg, B.; Slama, R. Air pollution, health and social deprivation: A fine-scale risk assessment. *Environ. Res.* **2016**, *147*, 59–70.
77. Muriel-García, M.; Cerón-Bretón, R.M.; Cerón-Bretón, J.G. Air pollution in the Gulf of Mexico Open. *J. Ecol.* **2016**, *6*, 32.
78. Ničeno, B.; Dhotre, M.; Deen, N. One-equation sub-grid scale (SGS) modelling for Euler–Euler large eddy simulation (EELES) of dispersed bubbly flow. *Chem. Eng. Sci.* **2008**, *63*, 3923–3931.
79. Nieuwstadt, F.; van Dop, H. *Atmospheric Turbulence Pollution Modeling*; Reidel: 1982.
80. Ouidir, M.; et al. Estimation of exposure to atmospheric pollutants during pregnancy integrating space–time activity and indoor air levels: Does it make a difference? *Environ. Int.* **2015**, *84*, 161–173.
81. Padilla, C.; Kihal-Talantikit, W.; Vieira, V.; Deguen, S. City-specific spatiotemporal infant and neonatal mortality clusters: Links with socioeconomic and air pollution spatial patterns in France. *Int. J. Environ. Res. Public Health* **2016**, *13*, 624.
82. Perry, S.G. CTDMPPLUS: A dispersion model for sources near complex topography. Part I: Technical formulations. *J. Appl. Meteorol.* **1992**, *31*, 633–645.
83. Po, L.; Rollo, F.; Viqueira, J.R.R.; Lado, R.T.; Bigi, A.; López, J.C.; Nesi, P. TRAFAIR: Understanding Traffic Flow to Improve Air Quality. In Proceedings of the 2019 IEEE International Smart Cities Conference (ISC2), Casablanca, Morocco, 14–17 October 2019; pp 14–17.
84. Pollard, A.S.; et al. Integrating dispersion modelling and lichen sampling to assess harmful heavy metal pollution around the Karabash copper smelter, Russian Federation. *Atmos. Pollut. Res.* **2015**, *6*, 939–945.
85. Pope, C.A., III; et al. Relationships between fine particulate air pollution, cardiometabolic disorders, and cardiovascular mortality. *Circ. Res.* **2015**, *116*, 108–115.
86. Raffee, A.F.; Rahmat, S.N.; Hamid, H.A.; Jaffar, M.I. A Review on Short-Term Prediction of Air Pollutant Concentrations. *Int. J. Eng. Technol.* **2018**, *7*, 32–35.
87. Reynolds, S.D.; Roth, P.M.; Seinfeld, J.H. Mathematical modeling of photochemical air pollution—I: Formulation of the model. *Atmos. Environ.* **1973**, *7*, 1033–1061.
88. Rodhe, H. A study of the sulfur budget for the atmosphere over Northern Europe". *Tellus* **1972**, *24*, 128–138.
89. Rodhe, H. Some aspects of the use of air trajectories for the computation of large-scale dispersion and fallout patterns. In *Advances in Geophysics*; Elsevier: Amsterdam, The Netherlands, 1975; Volume 18, pp 95–109.
90. Roy, D.; Singh, G.; Yadav, P. Identification and elucidation of anthropogenic source contribution in PM10 pollutant: Insight gain from dispersion and receptor models. *J. Environ. Sci.* **2016**, *48*, 69–78.
91. Sachdeva, S.; Baksi, S. Air Pollutant Dispersion Models: A Review. In *Springer Transactions in Civil and Environmental Engineering*; Springer: Berlin/Heidelberg, Germany, 2017; pp. 203–207.
92. Sagan, V.; Pasken, R.; Zarauz, J.; Krotkov, N. SO<sub>2</sub> trajectories in a complex terrain environment using CALPUFF dispersion model, OMI and MODIS data. *Int. J. Appl. Earth Obs. Geoinf.* **2018**, *69*, 99–109.
93. Salem, N.B.; Garbero, V.; Salizzoni, P.; Lamaison, G.; Soulhac, L. Modelling pollutant dispersion in a street network. *Bound. - Layer Meteorol.* **2015**, *155*, 157–187.
94. Sanchez, B.; Santiago, J.-L.; Martilli, A.; Palacios, M.; Kirchner, F. CFD modeling of reactive pollutant dispersion in simplified urban configurations with different chemical mechanisms. *Atmos. Chem. Phys.* **2016**, *16*, 12143–12157.
95. Sarkhosh, M.; Shamsipour, A.; Yaghmaeian, K.; Nabizadeh, R.; Naddafi, K.; Mohseni, S.M. Dispersion modeling and health risk assessment of VOCs emissions from municipal solid waste transfer station in Tehran, Iran. *J. Environ. Health Sci. Eng.* **2017**, *15*, 4.
96. Schneider, P.; Castell, N.; Vogt, M.; Dauge, F.R.; Lahoz, W.A.; Bartonova, A. Mapping urban air quality in near real-time using observations from low-cost sensors and model information. *Environ. Int.* **2017**, *106*, 234–247.
97. Shaban, K.B.; Kadri, A.; Rezk, E. Urban air pollution monitoring system with forecasting models. *IEEE Sens. J.* **2016**, *16*, 2598–2606.
98. Singh, D.; MukeshSharma, A.; Shukla, S. Ambient Air Quality Modeling of 355 MW Gas Based Combined Cycle Power Plant in Complex Terrain. *Indian J. Air Pollut. Control* **2016**, *16*, 10–16.
99. Singh, K. Air pollution modeling. *Int. J. Adv. Res. Ideas Innov. Technol.* **2018**, *4*.
100. Soulhac, L.; Nguyen, C.V.; Volta, P.; Salizzoni, P. The model SIRANE for atmospheric urban pollutant dispersion. PART III: Validation against NO<sub>2</sub> yearly concentration measurements in a large urban agglomeration. *Atmos. Environ.* **2017**, *167*, 377–388.
101. Soulhac, L.; Salizzoni, P.; Cierco, F.-X.; Perkins, R. The model SIRANE for atmospheric urban pollutant dispersion; part I, presentation of the model. *Atmos. Environ.* **2011**, *45*, 7379–7395.

102. Squizzato, S.; Masiol, M. Application of meteorology-based methods to determine local and external contributions to particulate matter pollution: A case study in Venice (Italy). *Atmos. Environ.* **2015**, *119*, 69–81.
103. Su, R.; et al. Exploration of the formation mechanism and source attribution of ambient ozone in Chongqing with an observation-based model. *Sci. China Earth Sci.* **2018**, *61*, 23–32.
104. Tomasi, E.; et al. Dispersion Modeling Over Complex Terrain in the Bolzano Basin (IT): Preliminary Results from a WRF-CALPUFF Modeling System. In *International Technical Meeting on Air Pollution Modelling and its Application*; Springer: Berlin/Heidelberg, Germany, 2016; pp 157–161.
105. Tominaga, Y.; Stathopoulos, T. CFD simulations of near-field pollutant dispersion with different plume buoyancies. *Build. Environ.* **2018**, *131*, 128–139.
106. Trieu, T.; Duc, H.N.; Scorgie, Y. Performance of TAPM-CTM as an airshed modelling tool for the Sydney region. In Proceedings of the 22nd International Clean Air & Environment Conference, Melbourne, Australia, September 2015.
107. ul Haq, A.; Nadeem, Q.; Farooq, A.; Irfan, N.; Ahmad, M.; Ali, M.R. Assessment of AERMOD modeling system for application in complex terrain in Pakistan. *Atmospheric Pollution Research* 2019.
108. Wang, A.; Fallah-Shorshani, M.; Xu, J.; Hatzopoulou, M. Characterizing near-road air pollution using local-scale emission and dispersion models and validation against in-situ measurements. *Atmos. Environ.* **2016**, *142*, 452–464.
109. Wang, M.; et al. Air pollution and lung function in Dutch children: A comparison of exposure estimates and associations based on land use regression and dispersion exposure modeling approaches. *Environ. Health Perspect.* **2015**, *123*, 847–851.
110. Xie, W.; et al. Relationship between fine particulate air pollution and ischaemic heart disease morbidity and mortality. *Heart* **2015**, *101*, 257–263.
111. Xin, Y.; Wang, G.; Chen, L. Identification of long-range transport pathways and potential sources of PM10 in Tibetan Plateau uplift area: Case study of Xining, China in 2014. *Aerosol Air Qual. Res.* **2016**, *16*, 1044–1054.
112. Xu, Q.; et al. Fine particulate air pollution and hospital emergency room visits for respiratory disease in urban areas in Beijing, China, in 2013. *PLoS ONE* **2016**, *11*, e0153099.
113. Yaacof, N.; Qamaruzzaman, N.; Yusup, Y. Comparison method of odour impact evaluation using calpuff dispersion modelling and on-site odour monitoring. *Eng. Herit. J.* **2017**, *1*, 1–5.
114. Yazdi, M.N.; Arhami, M.; Ketabchy, M.; Delavarrafei, M. Modeling of Cement Factory Air Pollution Dispersion by AERMOD. 2016.
115. Zhang, Y.; et al. Association between ambient air pollution and hospital emergency admissions for respiratory and cardiovascular diseases in Beijing: A time series study. *Biomed. Environ. Sci.* **2015**, *28*, 352–363.
116. Zhong, J.; Cai, X.-M.; Bloss, W.J. Modelling the dispersion and transport of reactive pollutants in a deep urban street canyon: Using large-eddy simulation. *Environ. Pollut.* **2015**, *200*, 42–52.
117. Zhong, J.; Cai, X.-M.; Bloss, W.J. Modelling photochemical pollutants in a deep urban street canyon: Application of a coupled two-box model approximation. *Atmos. Environ.* **2016**, *143*, 86–107.