

Investigation of Mixing Dynamics of a Pilot-Scale Twin Paddle Blender Containing Non-Spherical Particles [†]

Behrooz Jadidi ^{1,*}, Mohammadreza Ebrahimi ², Farhad Ein-Mozaffari ³ and Ali Lohi ⁴

¹

² mebrahimi@torontomu.ca

³ fmozaffa@torontomu.ca

⁴ alohi@torontomu.ca

* Correspondence: bjadidi@torontomu.ca

[†] Presented at the 2nd International Electronic Conference on Processes: Process Engineering – Current State and Future Trends (ECP 2023), 17–31 May 2023; Available online: <https://ecp2023.sciforum.net/>.

Abstract: An in-depth analysis of the flow patterns and mixing dynamics in a twin paddle blender with the bi-disperse non-spherical particles was investigated using the discrete element method (DEM) and experiments. This study aimed to explore the mixing efficiency of a twin paddle blender containing two different shapes of non-spherical particles. The study focussed on the demonstration of the applicability of the GPU-based DEM model. To achieve this, calibration tests were performed using a classical rotary drum to validate the accuracy of the DEM model. The next step was to examine the impact of various operating parameters on the mixing performance such as impeller rotational speed. The relative standard deviation (RSD) was employed as a measure of mixing performance. Results revealed that the rotational speed of the impellers had a significant impact on the mixing performance.

Keywords: particulate flow; non-spherical particle; mixing dynamics; discrete element method (DEM); double paddle blender

1. Introduction

The mixing of granular materials is a critical process in various industries, including energy, food, pharmaceuticals, and chemicals. When designing processing units like mixing systems, it is essential to understand the mechanical behavior of the granular materials. However, predicting their behavior under various operating conditions can be challenging due to the random and complex particles' interactions. This task becomes even more challenging when particles have different sizes, shapes, and physical properties. To tackle this issue, researchers have developed the Discrete Element Method (DEM) approach [1], which tracks individual particle motions and provides comprehensive particle-level information about the system. While the DEM approach has proved effective in simulating various mixing systems [2–5], it has some challenges, including long computational times and high processing power requirements. Consequently, models often simplify the system by using monodisperse size distributions and spherical particles [6]. However, this approach does not address the complexity of the particle shapes in industrial applications. To overcome this shortcoming, practical studies are necessary to model the particles accurately and develop effective solutions that can be implemented in the real-world engineering applications. Such studies will improve our understanding of irregular particles' behavior in various mixing scenarios. Thus, the objective of this research is to explore the mixing behavior of a blend of two non-spherical particle shapes (cubical and cylindrical particles) in a pilot-scale mixer using DEM. The effect of impeller

Citation: Jadidi, B.; Ebrahimi, M.; Ein-Mozaffari, F.; Lohi, A. Investigation of Mixing Dynamics of a Pilot-Scale Twin Paddle Blender Containing Non-Spherical Particles. *Eng. Proc.* **2023**, *37*, x. <https://doi.org/10.3390/xxxxx> Published: 17 May 2023



Copyright: © 2023 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

rotational speed on the mixing performance of two non-spherical particles in a twin paddle blender is discussed in this paper.


2. Modeling and Simulations

GPU-enhanced DEM via EDEM 2022 was used to study the mixing behavior in a double paddle blender. The DEM is a comprehensive numerical method that considers the movement and interaction of all particles in a mixing system. This method utilizes Newton's equations of motion to determine the translational and rotational velocities, positions, and orientations of individual particles based on their contacts with other particles and walls. Various contact models have been developed to estimate and evaluate particle interactions [7,8]. The geometry of the twin-paddle blender and the formulas used to determine the contact forces and torques are available in our prior research and are not included in this paper for the purpose of being concise [3,6,9–13]. Additionally, in the simulations, the polyhedral method was applied to represent non-spherical particles.

3. Results and Discussion

To begin with, image analysis was employed to collect experimental data from a rotary drum that had a mixture of cylindrical and cubical particles. Then, the GPU-based DEM solver (EDEM v2022 commercial software) was utilized for the modelling of the same experiments. The experimental data was then used to calibrate the DEM model. The calibrated DEM model was used to investigate how the mixing performance is affected by the operating parameters once it was calibrated. Figure 1 shows different snapshots of the simulated mixer at a constant vessel fill level and particle number ratio ($\frac{Number_{cubical}}{Number_{cylindrical}}$), captured from various views after commencing 20 s of mixing process. The figure demonstrates that increasing the rotational speed of the paddles from 10 to 100 RPM improved the mixing performance.

The use of 100 RPM resulted in increased momentum transfer from impellers to particles. However, when the paddles rotated at higher speeds (100 RPM), the particles were less likely to move in bulk along the length of the vessel. On the other hand, a lower impeller rotational speed (70 RPM) allowed particles to move and mix more easily along the mixer's shaft than a higher impeller rotational speed (100 RPM), leading to almost similar mixing performance at both speeds. These findings are consistent with previous studies that have reported an overall improvement in mixer performance with increasing impeller rotational speed for the spherical particles [3,14]. The results suggest that the choice of impeller speed should be carefully considered in order to achieve optimal mixing performance in specific applications. When choosing the impeller speed for optimal mixing performance, the mixing objectives such as achieving homogeneity, reducing particle agglomeration, or maximizing mass transfer should be considered. Moreover, the operational constraints such as power consumption and shear sensitivity should also be taken into account.

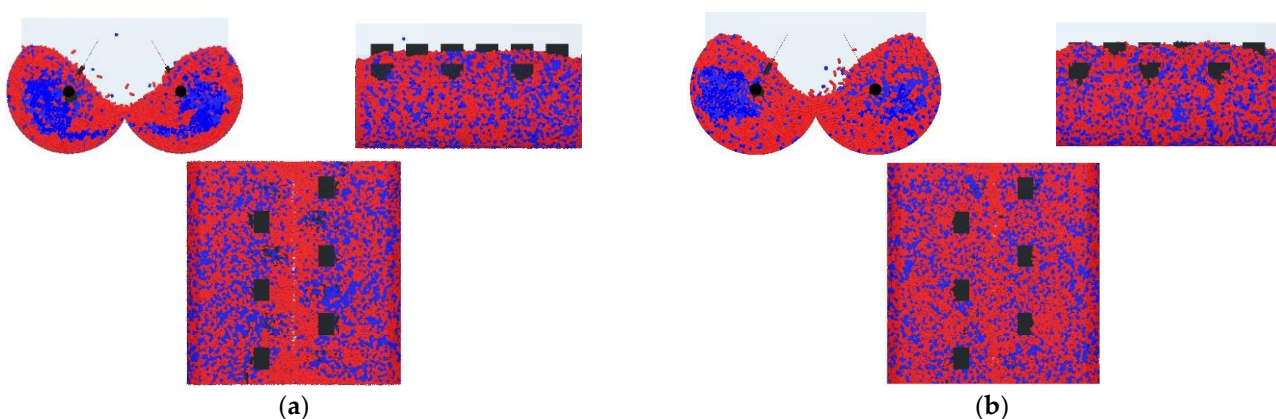

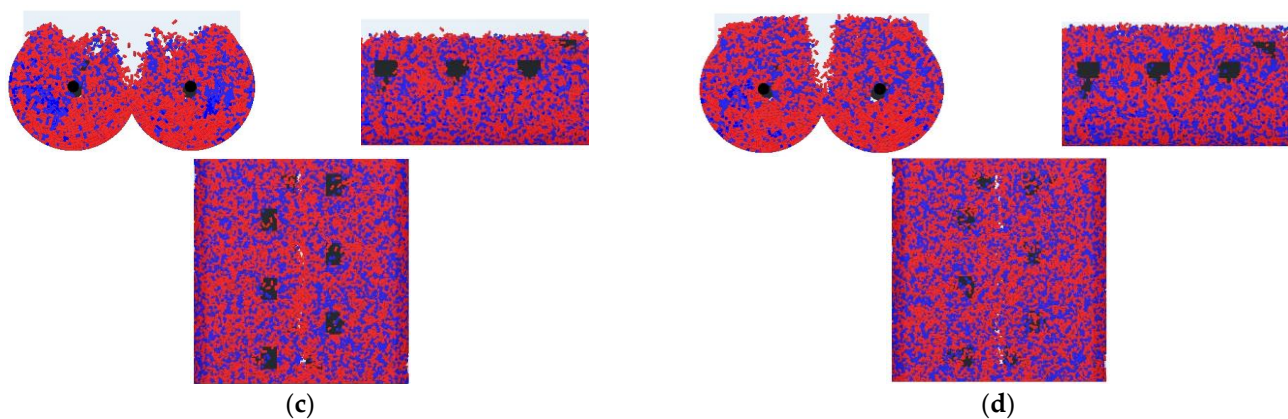


Figure 1. The impact of the impeller rotational speed on mixing at a fill level of 50% and particle number ratio of 1 under different paddle rotational speeds: (a) 10 RPM, (b) 40 RPM, (c) 70 RPM, and (d) 100 RPM.

4. Conclusions

This study used numerical analysis to examine the flow and mixing process of bi-disperse non-spherical particles in a horizontal twin paddle blender. The accuracy of the DEM model was verified by comparing it to the experimental data obtained from a rotary drum. This study also examined the effect of adjusting operating parameters on mixing performance. The findings demonstrated that the rotational speed of the paddle had the most substantial effect on the blender's mixing ability. Enhancing the paddle's rotational speed led to a notable improvement in mixing performance.

Author Contributions: B.J.: Conceptualization, Methodology, Software, Validation, Writing—original draft. M.E.: Conceptualization, Methodology, Software, Writing—review and editing, Supervision. F.E.-M.: Conceptualization, Resources, Methodology, Writing—review and editing, Supervision, Project administration, Funding acquisition. A.L.: Conceptualization, Resources, Methodology, Writing—review and editing, Supervision, Project administration, Funding acquisition. All authors have read and agreed to the published version of the manuscript.

Funding: This research was funded by Natural Sciences and Engineering Research Council of Canada (NSERC: RGPIN-2019-04644 and RGPIN-2019-05644).

Acknowledgments: The financial support of the Natural Sciences and Engineering Research Council of Canada (NSERC) is gratefully acknowledged.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Cundall, P.A.; Strack, O.D. A discrete numerical model for granular assemblies. *Géotechnique* **1979**, *29*, 47–65. <https://doi.org/10.1680/geot.1979.29.1.47>.
2. Muzzio, F.J.; Llusa, M.; Goodridge, C.L.; Duong, N.-H.; Shen, E. Evaluating the mixing performance of a ribbon blender. *Powder Technol.* **2008**, *186*, 247–254. <https://doi.org/10.1016/j.powtec.2007.12.013>.
3. Ebrahimi, M.; Yaraghi, A.; Jadidi, B.; Ein-Mozaffari, F.; Lohi, A. Assessment of bi-disperse solid particles mixing in a horizontal paddle mixer through experiments and DEM. *Powder Technol.* **2020**, *381*, 129–140. <https://doi.org/10.1016/j.powtec.2020.11.041>.
4. Laurent, B.; Cleary, P. Comparative study by PEPT and DEM for flow and mixing in a ploughshare mixer. *Powder Technol.* **2012**, *228*, 171–186. <https://doi.org/10.1016/j.powtec.2012.05.013>.
5. Cai, R.; Hou, Z.; Zhao, Y. Numerical study on particle mixing in a double-screw conical mixer. *Powder Technol.* **2019**, *352*, 193–208. <https://doi.org/10.1016/j.powtec.2019.04.065>.
6. Jadidi, B.; Ebrahimi, M.; Ein-Mozaffari, F.; Lohi, A. Mixing performance analysis of non-cohesive particles in a double paddle blender using DEM and experiments. *Powder Technol.* **2022**, *397*, 117122. <https://doi.org/10.1016/j.POWTEC.2022.117122>.
7. Norouzi, H.R.; Zarghami, R.; Sotudeh-Gharebagh, R.; Mostoufi, N. Coupled CFD-DEM modeling: Formulation, implementation and application to multiphase flows. John Wiley & Sons: Hoboken, NJ, USA, 2016. <https://doi.org/10.1002/9781119005315>.
8. Blais, B.; Vidal, D.; Bertrand, F.; Patience, G.S.; Chaouki, J. Experimental Methods in Chemical Engineering: Discrete Element Method—DEM. *Can. J. Chem. Eng.* **2019**, *97*, 1964–1973. <https://doi.org/10.1002/CJCE.23501>.

9. Bjadidi, B.; Ebrahimi, M.; Ein-Mozaffari, F.; Lohi, A. Effect of the Mixer Design Parameters on the Performance of a Twin Paddle Blender: A DEM Study. *Processes* **2023**, *11*, 733. <https://doi.org/10.3390/PR11030733>.
10. Jadidi, B.; Ebrahimi, M.; Ein-Mozaffari, F.; Lohi, A. Investigation of Mixing Non-Spherical Particles in a Double Paddle Blender via Experiments and GPU-Based DEM Modeling. *Eng. Proc.* **2022**, *19*, 24. <https://doi.org/10.3390/ECP2022-12661>.
11. Jadidi, B.; Ebrahimi, M.; Ein-Mozaffari, F.; Lohi, A. Investigation of impacts of particle shape on mixing in a twin paddle blender using GPU-based DEM and experiments. *Powder Technol.* **2023**, *417*, 118259. <https://doi.org/10.1016/J.POWTEC.2023.118259>.
12. Jadidi, B.; Ebrahimi, M.; Ein-Mozaffari, F.; Lohi, A. Mixing and segregation assessment of bi-disperse solid particles in a double paddle mixer. *Particuology* **2023**, *74*, 184–199. <https://doi.org/10.1016/J.PARTIC.2022.06.006>.
13. Jadidi, B.; Ebrahimi, M.; Ein-Mozaffari, F.; Lohi, A. A comprehensive review of the application of DEM in the investigation of batch solid mixers. *Rev. Chem. Eng.* **2022**. <https://doi.org/10.1515/REVCE-2021-0049>.
14. Yaraghi, A.; Ebrahimi, M.; Ein-Mozaffari, F.; Lohi, A. Mixing assessment of non-cohesive particles in a paddle mixer through experiments and discrete element method (DEM). *Adv. Powder Technol.* **2018**, *29*, 2693–2706. <https://doi.org/10.1016/j.appt.2018.07.019>.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.