

Evaluation of hydrodynamic conditions of the offshore zone of Oualidia lagoon (Atlantic Coast of Morocco)

Mohammed Bouchkara^{1,2,*}, Khalid El Khalidi^{1,2}, Nouhaila Erraji Chahid^{1,2}, Imane Joudar^{1,2}, Vladimir Koutitonsky³
Aïssa Benazzouz⁴, Abdenaim Minoubi⁵ and Bendahhou Zourarah^{1,2}.

- 1 Marine Geosciences and Soil Science Laboratory (URAC-45), Earth Sciences department, Faculty of Sciences, Chouaib Doukkali University, EL Jadida, Morocco. elkhalidi_khalid@yahoo.fr
 - 2 Center of Coastal and Sea, Chouaib Doukkali University, EL Jadida, Morocco.
 - 3 Hydrosoft SA., Saint-Zotique, QC, Canada.
 - 4 Nautical Science and Naval Engineering Department, Institut Supérieur d'Études Maritimes, Km 7, Road El Jadida, Casablanca B.P. 20520, Morocco. benazzouz.metlisem@gmail.com
 - 5 Interdisciplinary Laboratory LIRBEM, Department of Life and Earth Sciences, Ecole Normale Supérieure, Cadi Ayyad University, Marrakech, Morocco. minoubiabdenaim@gmail.com
- * Correspondence: m.bouchkara@yahoo.com

Abstract: The present study is based on the combination of field measurements with Copernicus Marine Service (CMS) data to assess the historical variations of ocean variables in the Oualidia lagoon in Morocco, including tides, waves, currents and winds. The lagoon of Oualidia is a site of ornithological importance, it has been classified as a site of biological and ecological interest (S.I.B.E), through the Master Plan of Protected Areas, and as a RAMSAR site since 2005. This lagoon has undergone significant anthropogenic modifications in recent years, which included the creation of a sediment trap in 2011 and dike opening upstream in 2005. The objective of this research is to evaluate the hydrodynamic conditions of this lagoon and its open sea area (offshore) using field measurements and ocean data collected from Marine Copernicus Service platform. As a result, the analysis of wind data for the year 2021 shows that the prevailing winds are generally northwest, north to northeast, with a very strong predominance of north to northeast winds. The harmonic analysis of tides for the same period showed that the lagoon is dominated by a M2 tide component with an amplitude reaching 0.9649 m. In addition, the results of the analysis of waves in front of the lagoon of Oualidia revealed a dominance of waves of height ranging between 1 and 2.5 m representing nearly 60% of model outputs. Waves with a height of 3 to 4 m represent 10% of results while large winter waves (> 4m) represent only 3%. In addition, the analysis of current data (in situ) indicates that the current velocities decrease from downstream to upstream area, in relation to the variation and the period of tides that affect the variability of tidal currents inside of the lagoon.

Keywords: Hydrodynamics; Tides; Waves; Currents; CMS; Offshore; Oualidia; Morocco.

Citation: Lastname, F.; Lastname, F.; Lastname, F. Title. *Proceedings* **2022**, *69*, x. <https://doi.org/10.3390/xxxxx>

Academic Editor: First name Lastname

Published: date

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2022 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

Surface water systems are waters that are naturally open to the atmosphere, such as rivers, lakes, reservoirs, estuaries and coastal waters. Their water quality management requires three important working methods, (1) monitoring, (2) theoretical analysis, and (3) computer modelling [1].

To help decision-makers identify the extent of environmental problems in these environments, reliable measured data are essential. Monitoring is the only way to know the actual characteristics of the ecosystem and to give the basis for theoretical analysis and numerical modelling [1]. It is only after making certain observations that theoretical analysis and numerical modelling can help to understand hydrodynamic and water quality processes and produce reliable outputs to support decision making. In many instances,

these processes cannot be well described in mathematically based models until they are measurable in real water bodies [1].

Lagoons, in particular, represent 13% of the world's coastline [2–4]. These coastal ecosystems are relatively isolated from the open ocean by coastal barriers that allow communication between channels and inlets. Some lagoons have a maximum depth of more than 30 m, although the average depth is rarely greater than 2 m [5]. Traditionally, lagoons have been very beneficial to humans providing both high biological productivity and port and navigation facilities. However, these coastal ecosystems are actively affected by interactions between terrestrial, marine, and atmospheric processes and are most sensitive to a variety of natural processes, including global climate change and also human activities [6]. For these reasons, the permanent assessment of hydrodynamical, sedimentological and ecological states of these ecosystems is of paramount importance for understanding their natural evolution and supporting decision making in these complex coastal environments.

In this paper, we focus on the historical assessment of the main hydrodynamic factors controlling the long-term and short-term trends of the sedimentological and ecological properties in Oualidia lagoon (Atlantic Coast of Morocco). This study represents a primary assessment of the hydrodynamic parameters in the Oualidia lagoon based on Copernicus forecasting systems and in situ measurements that will allow modeling the hydrodynamic and sedimentological state of the lagoon using mathematical models.

2. Materials and methods

2.1 Study area

The lagoon of Oualidia is located on the Moroccan Atlantic Coast in the province of Sidi Bennour city (32° 44',42 N - 9° 02',50 W) and extends parallel to the coast over a distance of about 7 km long and 0.5 km wide. The communication of the lagoon with the ocean is ensured by three inlets located downstream: a permanent main inlet (150 m wide and 3 m deep on average) and a secondary inlet (50 m wide and 2 m deep) and a third small one, active only during the periods of high tides (Figure 1).

This lagoon is among the most important coastal wetlands in Morocco. Today, in relation to its ornithological importance, this site has been classified as a site of biological and ecological interest (S.I.B.E), through the Master Plan of Protected Areas, and as a RAMSAR site since 2005. This site, of international value, constitutes a migratory stopover and a winter refuge appreciate by the various species of waterbirds.

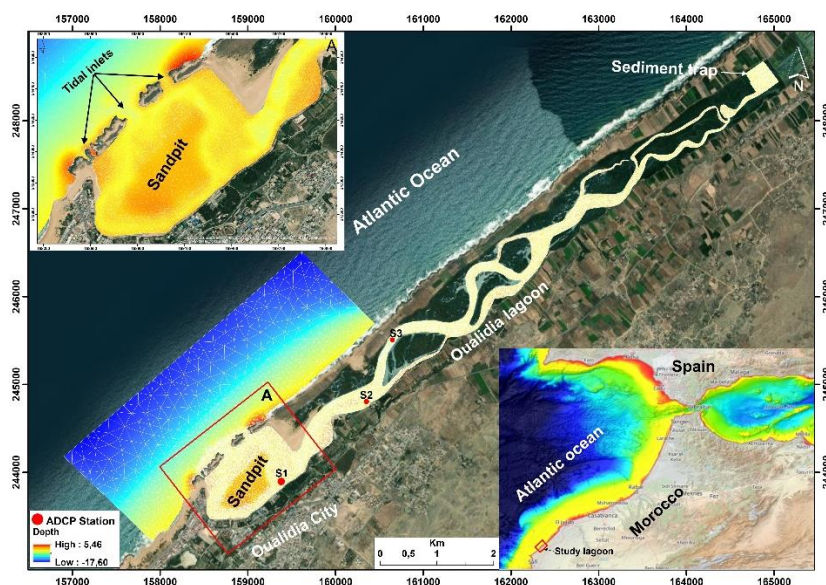


Figure 1. Location of the study area.

2.2 Data collection

Wind data, were obtained as NETCDF files by the European Centre for Medium-Range Weather Forecasts (ECMWF, <http://www.ecmwf.int>) (accessed on 01 March 2022).

water levels and offshore currents data were downloaded from the IBI model product reanalysis in the Copernicus project. <http://marine.copernicus.eu/services-portfolio/access-to-products/> (accessed 01 January 2022).

Significant wave height, direction and period data were collected using the IBI-MFC model (<https://resources.marine.copernicus.eu/product>). This model provides a multi-year high resolution wave reanalysis product for the IBI area from 01/01/1993. The model system is executed by AEMET (Spanish Meteorological Agency) in the AEMET supercomputer (NIMBUS). The configuration of the multi-year model is as similar as possible to the configuration of the model used in the IBI-MFC near-real time forecasting system. The model application is based on the MFWAM model developed by Météo-France (MF), with the same 5 km horizontal resolution grid.

In situ measurements of currents were recorded at three different stations in the lagoon (Figure 1), which were used to calculate the characteristics of the vertical velocity profiles. Velocities were recorded at each 0.5m layer (~10 layers deep), with layer 10 located closest to the water surface, while layer 1 is directly above the ADCP, from 0.5m to 5m above the bottom. The deployment depth was 5m and data were recorded every 600s. The current meter continuously records several parameters such as current speed and direction, water temperature, and water pressure. These measurements were made over a period of 10 days including neap and spring water coefficients.

3. Results and discussions

3.1 Wind data analysis

The wind rose of one year's data (2021) observed at the inlets of the lagoon of Oualidia is presented in Figure 2 (Source. <https://www.ecmwf.int/en/research/climate-reanalysis>). The wind rose analysis shows that the prevailing winds are generally northwest, north to northeast, with a very strong predominance of north to northeast winds as described by [7, 8]. Annual wind statistics offshore of the Oualidia lagoon indicate that the annual mean winds have speeds ranging from 2 to 10 m. s⁻¹. Thus, the study of [10], showed that the annual average winds have speeds ranging between 4 and 9 m. s⁻¹, with predominantly northeasterly and northerly directions.

Regardless of the season, maximum north and northeast wind intensities are often greater than 9 m. s⁻¹. The percentage of the dominant wind speed shows varying frequencies of occurrence depending on the season, ranging from 2% to 4% for a wind speed varying between 2 and 4 m. s⁻¹, from 4% to 8% for a maximum wind speed arriving up to 6 m. s⁻¹ and between 8% and 10% with a wind speed varying between 6 and 10 m. s⁻¹.

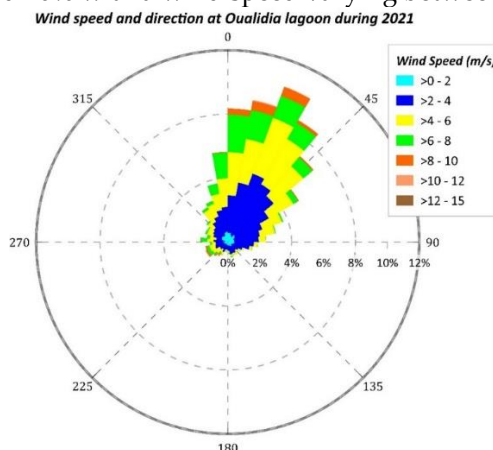


Figure 2. Wind rose of the year of 2021 at Oualidia lagoon (ECMWF, <http://www.ecmwf.int>).

3.2 Water level analysis

The tidal data used in this analysis were mainly collected from Iberia Biscay Irish - Monitoring Forecasting Centre (IBI MFC2). The analysis of these data showed that the Oualidia lagoon is strongly influenced by semi-diurnal M2 type tides (of period 12.42h) [7-9].

The tide is of the semi-diurnal type, almost regular. The average tidal range is 1.30 meters for the neap and 2.80 meters for the spring tides. The exceptional spring tide is +3.94 meters and the exceptional spring low tide is 0.41 meters, for an amplitude of 3.53 meters.

The tidal amplitudes and phases of the Oualidia lagoon for the water level constituents are given in Table 1. The amplitude and phases of the tidal harmonics along the main channel reveal a regular change in the character of tides from the entrance inlets to the upstream of the lagoon. The M2, Z0 and S2 harmonics along the lagoon were particularly significant. The fourth most significant was N2 followed by K2.

It can be seen that in the Oualidia lagoon, it is the semi-diurnal M2 harmonic that predominates, with an amplitude of about 0.96 m. It is followed in importance by the harmonics S2 (Amplitude 0.35 m), N2 (Amplitude 0.20 m) and K2 (Amplitude 0.09 m).

The diurnal tidal components O1, K1 and P1 show lower amplitudes, partly due to the presence of an amphidromic point offshore. Examination of the relative phases of the harmonic components indicates that the tide along the Moroccan coast propagates from south to north.

Table 1. Harmonic analysis of tides during 2021 at Oualidia lagoon.

Tidal component	Oualidia lagoon	
	Amplitude (m)	Phase (deg)
M2	0.9649	51.57
Z0	0.3582	180
S2	0.3511	76.7
N2	0.2069	35.07
K2	0.0946	70.72
K1	0.0659	50.79
O1	0.0596	303.51
MSM	0.0261	207.93
SSA	0.0209	26.81
P1	0.019	43.73

3.3 Wave analysis

The primary analysis of the wave data showed that the Oualidia lagoon is characterized by a dominance of waves with heights between 1 and 2.5 m and representing nearly 60% of the model outputs. waves of height 3 to 4 m represent 10% while large winter waves (> 4m) represent only 3% of the model results (Figure 3).

In terms of period, the 10-11s interval dominates between April and September (56% to 68% of model outputs). Between the months of May and September, the period that dominates is that of 6 - 7s with a rate varying between 50% and 73%.

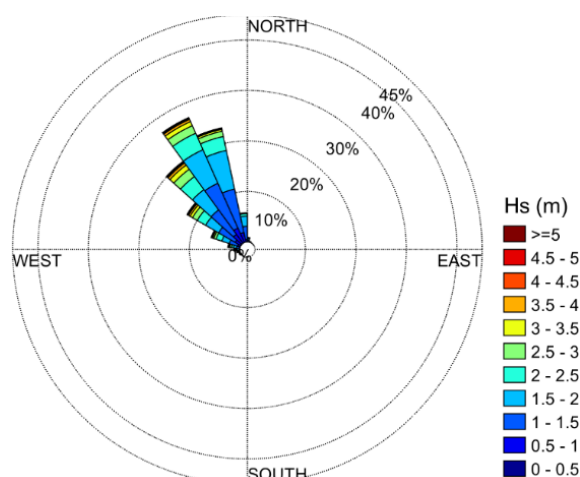


Figure 3. Rose of Wave Height in the Offshore zone of Oualidia lagoon (<https://resources.marine.copernicus.eu/product>).

3.4 Current variability

The study by Hilmi et al. (2005) broadly indicate that the currents respond primarily to the tide outside the lagoon. The currents are oriented parallel to the channel axis, with maximum velocities varying between 0.56 m/s, 0.57 m/s, and 0.73 m/s. These speeds decrease to about 0.1 to 0.2 m/s during neap tides. Current directions oscillate by 180 degrees between ebb and flood.

In 2003, six measurement points were carried out by current meters distributed over the lagoon so that the different points allow the characterization of the axial and transverse components of the current [12]. The maximum velocities recorded were about 1.2 m/s for the station near the lagoon's inlets. While moving towards the upstream zone of the lagoon the maximum speeds are of the order of 0,7 m/s. Further upstream of the lagoon, the velocities decrease rapidly.

The current measurements conducted in 2012 [13], showed also that the current velocities in the Oualidia lagoon decrease from downstream to upstream. The maximum velocities directed upstream are about 1 m/s and the maximum velocities directed downstream are 0.65 m/s. The duration of the flood is shorter than that of the ebb, but the flood currents are not necessarily more intense than the ebb currents. The strongest currents occur 1 to 2 hours before and after high tide. During these periods, surface currents are slightly greater than bottom currents; otherwise, surface and bottom currents are identical.

The measurements made on April 2021 during spring tide conditions, allowed us to assess the actual hydrodynamic state of the lagoon. Current velocity is shown vertically to be able to see variations in current velocities at each depth vertically [14]. Station 1 has a maximum current speed of 0.644 m/s, with an average speed of 0.308 m/s at layer 8. Station 2 has a maximum current speed of 1.113 m/s with an average current speed of 0.256 m/s, located in the layer 10 (1m depth). The current velocity at Station 3 is 1.047 m/s with an average speed of 0.550 m/s at layer 6 (-3m depth). The average current velocity at the bottom layer sequentially at stations 1, 2, and 3 is 0.284 m/s, 0.304 m/s and 0.46 m/s, with the highest maximum speed of 0.89 m/s at station 3.

The current velocity profile for each station at each depth of the surface waters does not show a distribution trend of increasing velocity. Based on the three stations observed, Station 1 has a smaller current velocity of 0.01 m/s at the surface compared to layer 8. Station 2 has a different trend, with an increasing current velocity in the layer near the surface of 0.197 m/s.

It can be noted that the current speeds decrease from downstream to upstream of the lagoon taking into account the variability and the period of the tides which influence the variability of currents inside the lagoon (neap and spring).

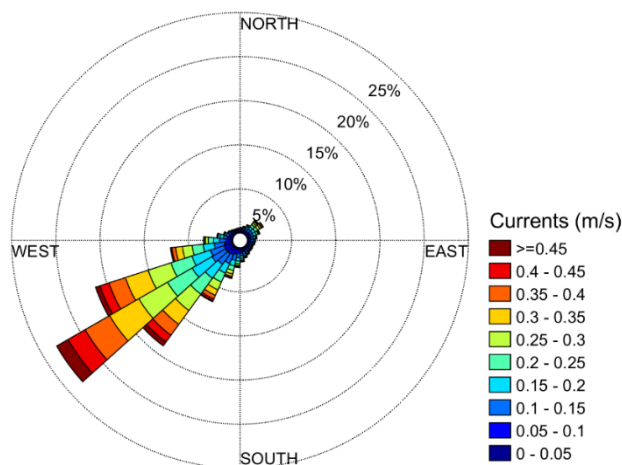


Figure 4. Rose of currents in the Offshore zone of Oualidia lagoon.

4. Conclusion

The evaluation of oceanographic parameters in the lagoon of Oualidia allowed us to describe the historical and current state of the lagoon of Oualidia in terms of hydrodynamic circulation.

Data from Copernicus Marine Service in combination with in situ measurements showed a significant variability of oceanographic parameters of the study area namely currents, tides and waves.

The lagoon system of Oualidia is mainly controlled by the interaction of tidal currents and waves in the downstream area, this interaction in relation to the direction and speed of prevailing winds can influence and control the circulation of water inside the lagoon and consequently the distribution of sediments and changes in the morphology of the main channel of the lagoon.

This investigation has allowed to extract the preliminary conclusions on the oceanographic state of the lagoon and its offshore part in order to proceed to a multirate modeling of the hydrodynamic and morphosedimentary processes based on a well-developed mathematical modeling.

Author Contributions: Mohammed Bouchkara downloaded and processed data and wrote the paper. Mohammed Bouchkara, Khalid EL Khalidi, Nouhaila Erraji Chahid, Imane Joudar, Aïssa Benazzouz and Zourarah Bendahhou designed and carried out the study. Mohammed Bouchkara, Khalid EL Khalidi, Nouhaila Erraji Chahid and Imane Joudar collected and processed the in situ data used in this research. Vladimi Koutitonsky and Abednaim Minoubi read and improved the content of the article. The study was supervised by Khalid EL Khalidi, Aïssa Benazzouz and Bendahhou Zourarah. All authors have read and approved the final manuscript.

Institutional Review Board Statement: Not applicable.

Informed Consent Statement: Not applicable.

Data Availability Statement: Not applicable.

Acknowledgments: The wave, tide, and ocean current data were downloaded from the Copernicus Marine Service platform. In this regard, the authors would like to thank MCS for providing these data and for helping scientific communities to make remarkable progress around the world. The authors would also like to thank the LGMSS laboratory for having provided field measuring instruments to measure the oceanographic data.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Ji, Z.-G. HYDRODYNAMICS AND WATER QUALITY MODELING RIVERS, LAKES, AND ESTUARIES; 2008.
2. Barnes, R. S. K. *Coastal Lagoons*; CUP Archive, 1980; Vol. 1.
3. Kjerfve, B. Chapter 1 Coastal Lagoons. In *Coastal Lagoon Processes*; Kjerfve, B. B. T.-E. O. S., Ed.; Elsevier, 1994; Vol. 60, pp 1–8. [https://doi.org/https://doi.org/10.1016/S0422-9894\(08\)70006-0](https://doi.org/https://doi.org/10.1016/S0422-9894(08)70006-0).
4. Velasco, A. M.; Pérez-Ruzafa, A.; Martínez-Paz, J. M.; Marcos, C. Ecosystem Services and Main Environmental Risks in a Coastal Lagoon (Mar Menor, Murcia, SE Spain): The Public Perception. *Journal for Nature Conservation*, **2018**, *43* (November 2017), 180–189. <https://doi.org/10.1016/j.jnc.2017.11.002>.
5. Pérez-Ruzafa, A.; Marcos, C.; Pérez-Ruzafa, I. M. Mediterranean Coastal Lagoons in an Ecosystem and Aquatic Resources Management Context. *Physics and Chemistry of the Earth*, **2011**, *36* (5–6), 160–166. <https://doi.org/10.1016/j.pce.2010.04.013>.
6. Fang, X.; Hao, C. L.; Cheng, C. G.; Ni, W.; Wang, J. C.; Zhang, Y. F. Pressure Analysis and Spatial Quantitative Assessment of Impact of Human Activities on Lagoon Ecosystem: A Case Study in Xincun and Li'an Lagoons, Hainan, China. *Applied Ecology and Environmental Research*, **2018**, *16* (5), 6253–6266. https://doi.org/10.15666/aer/1605_62536266.
7. Karim, H.; Omar, E.; Mohammed, I.; Jamila, L.; Benyounes, A.; Zineb, E.; Abdellatif, et Orbi; Ahmed, M. Fonctionnement Hydrodynamique De La Lagune De Oualidia (Maroc) Avant L'Amenagement De La Souille. *International Journal of Advanced Research*, **2017**, *5* (7), 2015–2027. <https://doi.org/10.21474/ijar01/4937>.
8. Koutitonsky, V. G.; Orbi, A.; Ouabi, M.; Ibrahim, I. L'étude Du Comportement Hydrosédimentaire Du Système Lagunaire Oualidia Par La Modélisation Mathématique. Phase 2 : Modélisation Hydro-Sédimentaire de l'état Actuel et de Scenarios d'aménagement. *Direction des Ports et du Domaine Public Maritime, Ministère de l'Équipement et du Transport, Royaume du Maroc*, **2007**, 204 p + Annexes. 40.
9. Hilmi, K.; Orbi, A.; Lakhdar, J. I.; Sarf, F. Etude Courantologique de La Lagune de Oualidia (Maroc) En Automne. **2005**, *07* (January), 67–71.
10. Elyaagoubi, S.; Umgiesser, G.; Maanan, M.; Maicu, F.; Mèžinè, J.; Hilmi, K.; Razinkovas-Baziukas, A. Effects of Groundwater Inputs to the Hydraulic Circulation, Water Residence Time, and Salinity in a Moroccan Atlantic Lagoon. *Journal of Marine Science and Engineering*, **2022**, *10* (1). <https://doi.org/10.3390/jmse10010069>.
11. Bouchkara, M.; Chair, A.; Erraji Chahid, N.; Joudar, I.; Hilmi, K.; Mellas, S.; Benazzouz, A.; Zourarah, B.; El Khalidi, K. Hydrodynamic Modeling of the Oualidia Lagoon , Atlantic Coast of Morocco. **2022**, No. November. <https://doi.org/10.34874/IMIST.PRSM/fsejournal-v12i1.30381>.
12. GEME. Diagnosis and Studies of the Containment of the Oualidia Lagoon - Phase 2 - Measurement Campaign. *Royaume du Maroc : Direction Provinciale de l'Équipement d'El Jadida, Ministère de l'Équipement et du Transport*, **2003**, 60.
13. Koutitonsky, V. G.; Zyserman, J.; Zourarah, B. Étude Par Modèle Mathématique de l'impact de l'ouverture de La Digue Amont et de l'enlèvement Ou Redistribution Des Sédiments de La Sablière Sur Le Comportement Hydro_sédimentaire de La Lagune d'Oualidia. Mission 2 : Modélisation Hydro-Sédimentaire de l'é. *Étude par modèle mathématique de l'impact de l'ouverture de la digue amont et de l'enlèvement ou redistribution des sédiments de la sablière sur le comportement hydro_sédimentaire de la lagune d'Oualidia. Mission 2 : Modélisation hydro-sédimentaire de l'é*, **2012**, 303 p. + Annexes.
14. Siagian, H.; Ismanto, A.; Putra, T. W. L.; Pranata. Stratification on the Vertical Structure of the Tidal Ellipse and Power Density Estimation in the Larantuka Strait, East Flores Based on ADCP Measurement Data. *IOP Conference Series: Earth and Environmental Science*, **2021**, *750* (1), 012023. <https://doi.org/10.1088/1755-1315/750/1/012023>.