

Machine vision for smart traps bandwidth optimization and new threats identification

Pedro Moura^{1,*} , Isabel Pinheiro^{1,2} , Francisco Terra¹ , Tatiana Pinho¹  and Filipe Santos¹ 

¹ INESC Technology and Science (INESC TEC), 4200-465 Porto, Portugal;

² School of Science and Technology, University of Trás-os-Montes e Alto Douro, 5000-801 Vila Real, Portugal

* Correspondence: pedro.h.moura@inesctec.pt (P.M.)

Abstract: With the rising impact of climate change on agriculture, insect-borne diseases are proliferating. There's a need to monitor the appearance of new vectors to take preventive actions that allow to reduce the use of chemical pesticides and treatment costs. Thus, agriculture requires advanced monitoring tools for early pests and disease detection. This work presents a new concept design for a scalable, interoperable and cost-effective smart trap that can digitize daily images of crop-damaging insects and send them to the cloud server. However, this procedure can consume approximately twenty megabytes of data per day, which can increase network infrastructure costs and require a large bandwidth. Thus, a two-stage system is also proposed to locally detect and count insects. In the first stage, a lightweight approach based on the SVM model and a visual descriptor is used to classify and detect all regions of interest (ROI) in the images, which contain the insects. Instead of the full image, only the ROI are then sent to a second stage on the pest monitoring system, where they will be classified. This approach can reduce, by almost 99%, the amount of data sent to the cloud server. Additionally, the classifier will identify unclassified insects in each ROI, which can be sent to the cloud for further training. This approach reduces internet bandwidth usage and helps to identify unclassified insects and new threats. In addition, the classifier can be trained with supervised data on the cloud and then sent to each smart trap. The proposed approach is a promising new method for early pests and disease detection.

Keywords: Bandwidth Optimization; SVM; Pests detection; Smart Trap

1. Introduction

Agricultural production has a significant impact on society and has faced some challenges in terms of pests and diseases. Each year, they account for up to 40 percent of global crop production losses and a high cost to the economy of around 220\$ billion [1]. Given the wide range of transmitting agents and their attack dynamics, it's difficult to define appropriate control methods, even more considering conventional systems that require manual analysis. This work aims to describe a new solution to automate that prediction process and to enable the earlier detection of insect-borne diseases. Thus, the farmer can reduce the treatment costs and the impacts on humans, plants and animals.

One way to control the risk level of pest propagation is to monitor the number of invasive insects in a particular region. Nowadays, this is frequently carried out with conventional chromotropic, pheromone and light traps that require a specialised person to visit them in a time-consuming, boring and expensive way. Besides that, when considering multiple trap locations and a weekly monitoring time interval for each one, it is not possible to achieve an efficient detection of pest appearance. These aspects lead to a poor spatial and temporal resolution of insect pest monitoring activity, resulting in late input data to the Decision Support Systems. Consequently, the alerts for the farmer will be delayed and the treatment costs will increase [2].

In recent years, smart traps equipped with sensing devices have achieved high-level importance due to their ability to automatically monitor pests and diseases. These systems

Citation: Moura P.; Pinheiro, I.; Terra F.; Pinho T. and Santos, F. Machine vision for smart traps bandwidth optimization and new threats identification. *Biol. Life Sci. Forum* 2023, 1, 0. <https://doi.org/>

Published:

Copyright: © 2023 by the authors. Submitted to *Biol. Life Sci. Forum* for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

support agricultural production and allow the reduction of labour, transport and logistics costs. There are already some technologies emerging that stand out for capturing, detecting, identifying and counting insects, which are carriers of diseases. Most of them are designed to couple a sticky paper that is used to attract the insects. Different configurations have been adopted with emphasis on delta and hive shapes. These solutions have been studied and modified to maximize the number of captures on the field using sex pheromones or food lures. Due to their closed structure model, they also present the advantage of protecting the sticky paper and the attractant against environmental conditions. In contrast, solutions that use colour as the main attractant tend to be open and to adopt a panel configuration [3]. In an attempt to use a disruptive chromotropic trap, [4] proposed a new approach using a four-sided sticky paper that takes into account the flight insect direction and the density of captures in each one to predict the pest propagation behaviour. Additionally, the authors develop a closed lid where the capture solution remains inside as long as the rain and wind values do not fall below a defined threshold. This also helps to reduce the chance of crowds of insects, thus avoiding overlaps between them that will have a negative impact on the identification process through image analysis. When the smart trap is applied in an environment with a large population of attracted insects, the sticky board becomes saturated in a short time, requiring manual intervention in a higher frequency [5]. In order to reduce that problem, [6] propose a motor-driven e-trap based on a yellow sticky trap to automatically replace attractants and avoid insect overlapping, allowing long-acting work without manual operation. The concept of the system is similar to the commercial solution Trapview Self-Cleaning [7] however the authors show that the principles of reserving and automatically replacing the attractants are different. In line with the cleaning mechanisms, [8] also develops a novel monitoring system that avoids crowd insects. After attracting them using a light source and killing them passing through an IR heating unit, they use a vibration plate to disperse them into a moving conveyor, which will be positioned for a photo to be taken. Then, the conveyor rotates to move away the insects that will fall into a recycling box.

Alongside the development of hardware and structures for capturing and acquiring data for monitoring systems, classification and identification methods have been worked on as a way of automating the insect counting process. While the first one is only concerned with characterizing a region of interest as part of a class, the second one provides the exact location in the image of the classes under study. Thus, machine learning and Deep Neural Networks (DNN) algorithms have been integrated and have been demonstrated to be an important part, with high accuracy results in the early pest prediction [9]. An important aspect to take into consideration when applying these algorithms is that even when the metrics for evaluating them are good, a critical analysis of the results must be made. In most cases, a pest alert should be generated to the farmer when the first insect appearance happens. This means that a false detection should be prioritized over an undetected insect. For this reason, [10] study two different DNNs, VGG16 and LeNet, and conclude that the second one outperforms the other since the obtained recall in the training process presented better results. The authors also proposed that the algorithms should run locally in the sensing device and only the number of insects should be sent to the farmer. This allows the reduction of the network bandwidth used and takes the opportunity to use Low Power Wide Range (LPWR) technologies, such as LoRaWAN, to communicate data to the server.

DNN algorithms usually require large datasets in the training process and higher processing power. Due to those requirements, other machine-learning approaches have been considered. Both [11] and [6] run a Selective Search algorithm to predict potential object's location in the captured image. Then, they discuss and test solutions based on Non-Max-Suppression algorithms to avoid overlapping regions and keep the ones with higher probability. [11] concluded that soft-NMS with exponential penalty function got better results, since shows less loss than conventional NMS methods. In turn, the authors in [6] assume invariable the insect's position and the illumination conditions. This allows them to apply a difference estimation between consecutive frames and detect the presence

of a new insect more efficiently. [12] use a deep-learning model YOLO to look for the insects in the image and then classify the species with an SVM model. This extracts local features (shape, texture, colour) and makes it easier to train the classification since it requires much fewer samples from a dataset. Besides that, the authors do a fine counting with SVM and some of the wrong insect detections from YOLO can be overtaken, increasing the accuracy of the whole monitoring system.

We proposed a new concept design for a scalable, interoperable and cost-effective smart trap that extend the pest monitoring application to a wide range of crops and species. A two-stage system is also proposed to locally detect and count insects, thus reducing the amount of data sent to the server. A lightweight approach based on a Visual Descriptor and a trained SVM classifier is proposed to detect ROI in the images, which contain the insects. Then, the ROI are sent to a second stage where they can be classified by DNN. Table 1 presents some of the research works that most fit the recent evolution that serve as comparison for our approach to pest monitoring.

Table 1. Some research works related to the proposed pest monitoring approach.

Configuration	Bait Type	Camera	Processing Unit	Communication	Insect detection	Local detection	Trap
IR heating unit	Light	12MP	-	-	ResNet-based	-	[8]
Panel + Sticky paper	Colour	8MP	Raspberry Pi 3 B+	✗	Connected Components Labelling	-	[4]
Sticky paper	Colour	8MP	Raspberry Pi 2 B	GPRS	YOLO+SVM	✓	[12]
Hive + Sticky paper	Pheromone	-	Raspberry Pi 3 + Movidius Stick	LoRaWAN	LeNet/VGG16	✓	[10]
Hive + Sticky paper	Pheromone	<1MP	GAP8	LoRaWAN	SANN	✓	[13]
Hive + Sticky paper	Pheromone	<1MP	STM32H743VI	GSM	MobileNet V2	✓	[11]
Hive + Sticky paper	Pheromone	8MP	Raspberry Pi Zero W	✗	-	-	[14]

2. Methods

The concept of the proposed trap was developed around six fundamental principles: (i) autonomous (ii) energetically sustainable without human intervention (iii) extensible to a wide range of crops and species (iv) modular and interoperable with other devices (v) provide the necessary information for the early and efficient prediction of a pest as well as generating alerts for the appearance of new species (vi) cost-effectiveness. To ensure the above principles, the trap was conceptualised from scratch, both in terms of hardware and structure, taking into consideration low-cost components. Regarding the first one, an intelligence unit was integrated into the trap using a low-power microprocessor Raspberry Pi Zero 2W. This lightweight and cost-effective version was chosen to ensure the enough processing power at a lower energy cost. It also has a large set of peripherals that allow it to communicate with numerous devices, such as cameras, sensors and actuators. Besides that, it has a wireless module that allows it to connect to any network or even act as an access point for other devices, making easier their interoperability and data communication to the trap, which will act as an IoT gateway. This way, all the data acquired on site, by different client devices, can be shared to the internet using only a single point, reducing hardware and communication costs. Two modules have also been added to reinforce the possibility of communicating data with other devices and over the internet: (i) a LoRa transceiver RFM98 provides the opportunity to communicate at a low data rate over a long range while (ii) an LTE module SIM7600E makes it possible to transmit and subscribe high data rate to and from the server. To avoid all these components reducing the autonomy of the system, each communication module can be activated or not at any time. Additionally, a low-power ATMEGA32u4 microcontroller is used to wake up the entire system only when needed. This period is fully configurable and can be adapted to each case. Sensors and actuators that require real-time and more frequent operation can also be added, without running the whole system. The whole hardware is powered by a 12V 7Ah battery, which is automatically rechargeable thanks to an LT3652 charger. This one employs an input voltage

regulation loop to maintain a solar panel (20W) at peak output power. If the input voltage falls below a programmed level, it reduces, automatically, the charge current. LT3652 also use a auto-recharge feature that starts a new charging cycle if the battery voltage falls 2.5% bellow the programmed value. As soon as the charging cycle finish, a low-current standby mode is applied.

According to the principle of extending the application to a wide range of crops and species, the trap structure was designed to adapt its configuration to a delta shape working with sex pheromones and colour attractants. This is possible using a servo motor that allows switching between three different positions in relation to the camera: (i) standby position and trap in delta configuration, with pheromone and white sticky paper inside and chromotropic sticky paper on the bottom (ii) image acquisition of the delta trap (iii) image acquisition of the chromotropic trap. All the positions are illustrated in Figure 1, respectively left side, middle and right side.

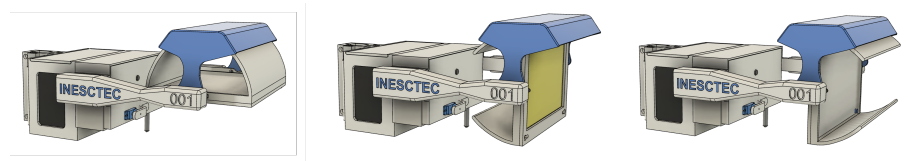


Figure 1. Positions adopted by the smart trap in relation to the camera.

Additionally, a servo motor was also placed in the front with an attached brush that remains above the camera lens while the trap is in the standby position, preventing the entry of dust, insects, water and fertilizers. The camera used was the Raspberry Pi module v2 which offers 8MP resolution, which is important to acquire small insects and make their identification possible. The 3D trap model helped improve our concept and was necessary to generate the print models. The entire trap has a built-in house and uses the polymer PETG since it offers thermal and mechanical resistance. Some prototypes have already been installed in vineyards, orchards and olive groves, as can be seen in Figure 2. All of them are connected to a weather station, which acquires the temperature and humidity of the air, as well as the spectrum of radiation that is affecting the crop.



Figure 2. Smart traps installed in olive groove (left), orchard (middle) and vineyard (right).

Since mobile communications proved to be quite unstable in weak signal locations, the possibility of performing insect detection and counting locally in the trap was taken. Considering the low-power microprocessor used and the short amount of data acquired, a lightweight approach that can be easily retrained was adopted. Thus, the proposed algorithm utilizes a SVM with colour and texture as features by concatenating the uniform Local Binary Pattern (LBP) histogram and the Hue, Saturation, Value (HSV) histogram of the image. SVM algorithms are appealing, especially for high-dimensional non-linear classification problems. To train an SVM, the dataset is divided into two sets, training and testing data, which consist of some data instances. Each data instance contains a value related to the class label and several values related to the features. SVM aims to construct a predictive model that can classify the instances in the test set based solely on their characteristics. The SVM is a non-parametric supervised classification algorithm with different configurations depending on the choice of the kernel function, which defines the

transformation space for building the decision surface. The goal of a binary classification task is to find an optimal separation hyperplane.

The LBP method is flexible and adaptable to many real-world problems. This method is simple, efficient for feature extraction and computationally simple. The LBP method compares the grey level value of the central pixel with the neighbour pixels with a predefined grid. This comparison results in binary patterns capturing the local texture patterns, which reveals the hidden information in the structure of an image.

The HSV colour space represents perceptual colour relationships and decouples colour-related features (H and S) from the brightness information (V). This separation allows attention to be focused only on the perceptual properties of colour, which can be highly informative for classification tasks.

Figure 3 shows the flowchart with the main tasks of the proposed algorithm capable of detecting insects in the input image, with detections as the output. The algorithm initiates the process by computing the image's LBP and HSV representations. Subsequently, the algorithm systematically scans the image using a predefined number of windows and step size. Within each ROI identified by the sliding windows, if the SVM classifies the region as an insect, it is necessary to check the neighbourhood. If the probability of the current region is greater than the neighbourhood, then the neighbourhood detections are eliminated and the current detection takes precedence. This verification avoids several bounding boxes detecting the same insect. Only the set of new detections is sent to the cloud server, thus allowing to reduce the bandwidth used.

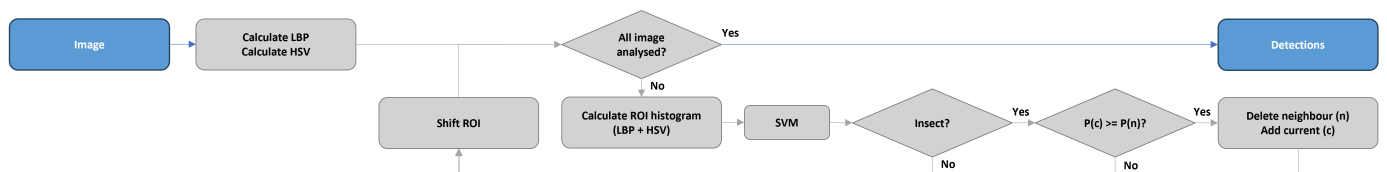


Figure 3. Flowchart of the algorithm for detection of insect using SVM.

3. Results


The classification and detection methods already described in Section 2 were trained and tested taking into account four different datasets that are a result of the data acquired using the developed monitoring system in field: two from an olive grove in Mirandela (OG1 and OG2), with X and Y insect images, respectively, and two from an orchard in Alcobaca (OC1 and OC2), with X and Y insect images, respectively. All of them were built from iterative images over a certain period without changing the sticky paper. This means that the last image acquired in each one was the accumulated result of several days of capture, which led to obtaining quite populated images with possible insect overlapping.

To obtain data for the SVM, random cut-outs were extracted from the final image within each dataset. Each cut-out was classified (insect or no insect), and a feature vector was calculated, the concatenate histogram of LBP and HSV. The acquired dataset contains data from 12,500 distinct images, with an 80:20 division between the training set (10,000) and the testing set (2,500). The SVM can use distinct kernels that adapt to different cases, so with the training set mentioned, different trainings were performed to find the SVM that best adapts to the problem of insect detection. Table 2 shows the classification results of the testing set obtained from training SVM with different kernels. The Radial Basis Function (RBF) and polynomial (poly) kernels demonstrate superior performance in the chosen metrics for both classes, with results above 85 %. The metrics utilized are duly explained by Pinheiro *et al.* [15].

Table 2. Classification results of the test set obtained with SVM with different kernels.

Kernels	Class	Precision	Recall	F1 Score	Accuracy
linear	no insect	74 %	75 %	74 %	70 %
	insect	66 %	64 %	65 %	
poly	no insect	97 %	90 %	94 %	93 %
	insect	88 %	96 %	92 %	
rbf	no insect	97 %	91 %	94 %	93 %
	insect	89 %	96 %	92 %	
sigmoid	no insect	54 %	54 %	54 %	48 %
	insect	39 %	39 %	39 %	

Since the RBF kernel has the best metrics and is less susceptible to overfitting, this was the selected kernel. Figure 4 presents the results of the detection algorithm utilizing the trained SVM with the RBF kernel. The algorithm was tested with three different window sizes and a step size of half the window size. The algorithm identifies most insects captured by the trap, with some false positives associated. Some of the windows overlap, this was not an issue considered when the algorithm was developed.

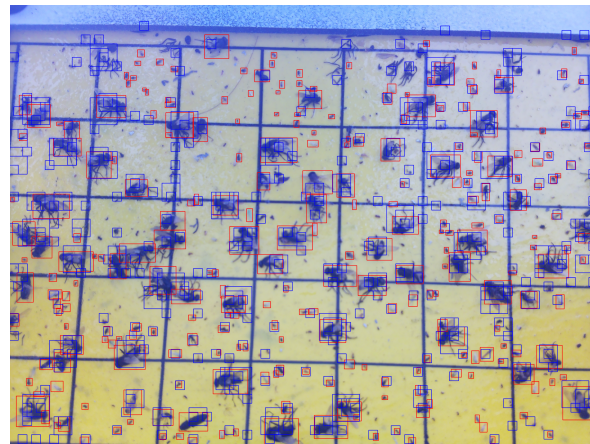**Figure 4.** Detection algorithm results using the trained SVM with an RBF kernel. Red bounding boxes present ground truth. Blue bounding boxes present the algorithm's predictions.

Regarding the bandwidth optimization that we proposed, an analysis was made comparing the amount of data transmitted assuming a daily full image with the amount of data that would be necessary to transmit if the proposed detection algorithm were locally applied. For the analysis, it was considered a mean size of 10MB per full image and a mean size of 13.1KB per insect (100x100 pixels). The results are mentioned in table 3.

Table 3. Bandwidth optimization with the proposed algorithm.

Dataset	Acquisition days	Captured insects	Bandwidth used without detection	Bandwidth used after detection	Bandwidth Optimization
OG1	180	205	1.76GB	2.69MB	98.5 %
OG2	180	190	1.76GB	2.49MB	98.6 %
OC1	134	115	1.31GB	1.51MB	98.9 %
OC2	134	140	1.31GB	1.83MB	98.6 %

4. Discussion and Conclusions

Automatic pest monitoring systems have evolved significantly over the last ten years. Prototypes with different configurations and attraction methods have been developed in order to better adapt to different crops and maximize the number of captures. In most cases, the search for the optimal configuration has been directly related to the crop under study and, consequently, to the pest being identified. In this work, we have proposed a more versatile configuration from which we can extend its application to a wide diversity

of crops and species since it can work with both sex pheromones and chromotropic sticky papers or even simultaneously.

During continuous tests carried out in vineyards, orchards and olive groves, two main difficulties were noted: (i) the need to change the paper at high intervals due to the overlapping of insects and the movement of parts of their bodies caused by environmental conditions (ii) the need to send full images to the server using mobile data in areas with a weak signal, resulting in daily losses of information that can compromise the early warning of a pest. Therefore, firstly, we consider important to add a mechanism for cleaning or automatically changing the sticky paper, as suggested in the literature. Although they add mechanical complexity to the trap and a higher cost in production, there will be a reduction in labour costs and will promote better results for the identification algorithms. Regarding the second difficulty, we decided to implement the insect identification process locally in the trap. Since we had a low-power microprocessor and short data sets, we opted to use a lightweight approach based on SVM models to classify insects or non-insects. So far, the models have been tested and continually retrained with the images that were sent to the server and subsequently annotated, achieving relevant performance. With the SVM model integrated into an algorithm for identifying new insects in the image, we are able to send only the object of interest and thus identify new threats and reduce, by almost 99%, the bandwidth used.

When considering a system that integrates a mechanism for cleaning and automatically changing attractants with a method for accurately detecting the presence of insect-borne diseases in the crop, it will be possible to provide the agricultural sector with a long-acting monitoring process that does not require manual operation. Most of the time currently spent travelling and working to monitor insects won't be longer necessary and the level of confidence in the early prediction of diseases will be optimised. Besides that, it will be possible to efficiently predict the appearance of new insects that, due to climate change, fly to other regions where they are not yet accounted for in the databases.

The proposed approach have been followed this evaluation and intends to impact the real world pest monitoring in Agriculture, taking advantage of the scalability, to work in different crops and with different attractants, the interoperability with other sensing devices and the cost-effective monitoring system developed to earlier identify new insect-borne diseases, generating data and alerts to the farmer using an optimised bandwidth.

Funding: This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 857202. Disclaimer: The sole responsibility for the content on this publication lies with the authors. It does not necessarily reflect the opinion of the European Commission (EC). The EC are not responsible for any use that may be made of the information contained therein.

References

1. FAO. Climate Change Fans Spread of Pests and Threatens Plants and Crops. *new FAO study* **2021**.
2. Preti, M.; Verheggen, F.; Angeli, S. Insect pest monitoring with camera-equipped traps: Strengths and limitations. *Journal of pest science* **2021**, *94*, 203–217.
3. Tirelli, P.; Borghese, N.; Pedersini, F.; Galassi, G.; Oberti, R. Automatic monitoring of pest insects traps by Zigbee-based wireless networking of image sensors. In Proceedings of the 2011 IEEE International Instrumentation and Measurement Technology Conference. IEEE, 2011, pp. 1–5.
4. Hadi, M.K.; Kassim, M.S.M.; Wayayok, A. Development of an automated multidirectional pest sampling detection system using motorized sticky traps. *IEEE Access* **2021**, *9*, 67391–67404.
5. Diller, Y.; Shamsian, A.; Shaked, B.; Altman, Y.; Danziger, B.C.; Manrakhan, A.; Serfontein, L.; Bali, E.; Wernicke, M.; Egartner, A.; et al. A real-time remote surveillance system for fruit flies of economic importance: sensitivity and image analysis. *Journal of Pest Science* **2023**, *96*, 611–622.
6. Huang, R.; Yao, T.; Zhan, C.; Zhang, G.; Zheng, Y. A Motor-Driven and Computer Vision-Based Intelligent E-Trap for Monitoring Citrus Flies. *Agriculture* **2021**, *11*, 460.
7. Trapview. Trapview. <https://trapview.com/>, 2023. [Online; accessed 24-September-2023].
8. Qing, Y.; Jin, F.; Jian, T.; XU, W.g.; ZHU, X.h.; YANG, B.j.; Jun, L.; XIE, Y.z.; Bo, Y.; WU, S.z.; et al. Development of an automatic monitoring system for rice light-trap pests based on machine vision. *Journal of Integrative Agriculture* **2020**, *19*, 2500–2513.

9. Teixeira, A.C.; Ribeiro, J.; Morais, R.; Sousa, J.J.; Cunha, A. A Systematic Review on Automatic Insect Detection Using Deep Learning. *Agriculture* **2023**, *13*, 713. 283
10. Segalla, A.; Fiacco, G.; Tramarin, L.; Nardello, M.; Brunelli, D. Neural networks for pest detection in precision agriculture. In Proceedings of the 2020 IEEE International Workshop on Metrology for Agriculture and Forestry (MetroAgriFor). IEEE, 2020, pp. 7–12. 284
11. Sütő, J. Embedded system-based sticky paper trap with deep learning-based insect-counting algorithm. *Electronics* **2021**, *10*, 1754. 285
12. Zhong, Y.; Gao, J.; Lei, Q.; Zhou, Y. A vision-based counting and recognition system for flying insects in intelligent agriculture. *Sensors* **2018**, *18*, 1489. 286
13. Brunelli, D.; Polonelli, T.; Benini, L. Ultra-low energy pest detection for smart agriculture. In Proceedings of the 2020 IEEE SENSORS. IEEE, 2020, pp. 1–4. 287
14. Pérez Aparicio, A.; Llorens Calveras, J.; Rosell Polo, J.R.; Martí, J.; Gemeno Marín, C. A cheap electronic sensor automated trap for monitoring the flight activity period of moths. *European Journal Of Entomology*, 2021, vol. 118, p. 315-321 **2021**. 288
15. Pinheiro, I.; Aguiar, A.; Figueiredo, A.; Pinho, T.; Valente, A.; Santos, F. Nano Aerial Vehicles for Tree Pollination. *Applied Sciences* **2023**, *13*, 4265. 289

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content. 290