



*Conference Proceedings Paper – Remote Sensing*

## Susceptibility Analysis of Landslide in Chittagong City Corporation Area

Sourav Das <sup>1,\*</sup> and Debasish Roy Raja <sup>2</sup>,

<sup>1</sup> Bachelor of Urban and Regional Planning (B.URP), Chittagong University of Engineering and Technology (CUET), Bangladesh; E-Mail: souravurp09@yahoo.com

<sup>2</sup> Assistant Professor, Department of Urban and Regional Planning, Chittagong University of Engineering and Technology (CUET), Bangladesh; E-Mail: rdebasishroy@gmail.com

\* Author to whom correspondence should be addressed; E-Mail: souravurp09@yahoo.com; Tel.: +88-01717010156.

*Published: 29 June 2015*

---

**Abstract:** In Chittagong city, landslide phenomena is the most burning issue which causes great problems to the life and properties and it is increasing day by day and becoming one of the main problems of city life. On 11 June 2007, a massive landslide happened in Chittagong City Corporation (CCC) area, a large number of foothill settlements and slums were demolished; more than 90 people died and huge resource destruction took place. It is therefore essential to analyze the landslide susceptibility for CCC area to prepare mitigation strategies as well as assessing the impacts of climate change. To assess community susceptibility of landslide hazard, a landslide susceptibility index map has been prepared using analytical hierarchy process (AHP) model based on geographic information system (GIS) and remote sensing (RS) and its susceptibility is analyzed through community vulnerability assessment tool (CVAT). The major findings of the research are 27% of total CCC area which is susceptible to landslide hazard and whereas 6.5 sq.km areas are found very highly susceptible. The landslide susceptible areas of CCC have also been analyzed in respect of physical, social, economic, environmental and critical facilities and it is found that the overall CCC area is highly susceptible to landslide hazard. So the findings of the research can be utilized to prioritize risk mitigation investments, measures to strengthen the emergency preparedness and response mechanisms for reducing the losses and damages due to future landslide events.

**Keywords:** analytical hierarchy process (AHP); CVAT tool; geographic information system (GIS); landslide; remote sensing (RS); susceptibility

---


## 1. Introduction

Due to its geographical location, Chittagong city suffers from numerous natural disasters like landslide, water logging, cyclone, flood etc. But at present landslides are the most burning issues in respect of Chittagong City Corporation (CCC) area. Because Chittagong hills are degrading by different anthropogenic stress such as hill cutting for construction, sand and clay mining purpose, increasing settlement in foothills, deforestation [1] which are very much responsible for landslide occurrences. The city, under the jurisdiction of City Corporation (Figure 1), has a population of about 2.5 million, is constantly growing with an area approximately 155 square kilometers [2]. A north-south hill range crosses the city and many settlements and slums have been developed in the foothills and lower income people are living in these areas in a risky situation. Almost every year CCC has experienced several devastated landslide incidences that brought vast damage to properties and natural environment, and some loss of human life, as shown in Table 1. The landslides in Chittagong are classified as ‘Earth Slides’ since those consist of 80% sand and finer particles [3]. It has been stated that the rainfall intensity and duration play very important role in producing these shallow landslides in Chittagong because of climate change [3]. Heavy monsoon rainfall intensified by strong storm from the Bay of Bengal (BOB) can cause abnormal precipitation in the area which mostly triggered landslides in Chittagong [4]. It is therefore essential to analyze the susceptibility of landslide for CCC area so that appropriate mitigation strategies can be developed to help combat impacts of climate change.

**Table 1.** Summary of the crucial landslide incidences in the last 10 years (2003-2013).  
Source: Comprehensive Disaster Management Programme-II 2012 and Field survey, 2014.

<b>Date</b>	<b>Location</b>	<b>Consequence</b>
<b>3 August 2005</b>	Nizam Road Housing Society	2 people killed and 12 injured
<b>11 June 2007</b>	Mati Jharna Colony of Lalkhan Bazar	128 people killed and 100 injured
<b>10 September 2007</b>	Nabi Nagar in Chittagong	2 people killed
<b>18 August 2008</b>	Matijharna in Chittagong	11 people killed and 25 injured
<b>26 June 2012</b>	Lebubagan Area and Foys Lake	90 people killed and 150 injured
<b>01 July 2011</b>	Batali hill, Tigerpass intersection	15 people killed and 150 injured
<b>28 July 2013</b>	Lalkhan Bazar	2 people killed

To prepare community susceptibility map of landslide hazard, geographic information system (GIS) and remote sensing (RS) based analytical hierarchy process (AHP) model is used in this research. Community vulnerability assessment tool (CVAT) is used to assess susceptible areas according to physical, social, economic, environmental and critical facilities of CCC area.

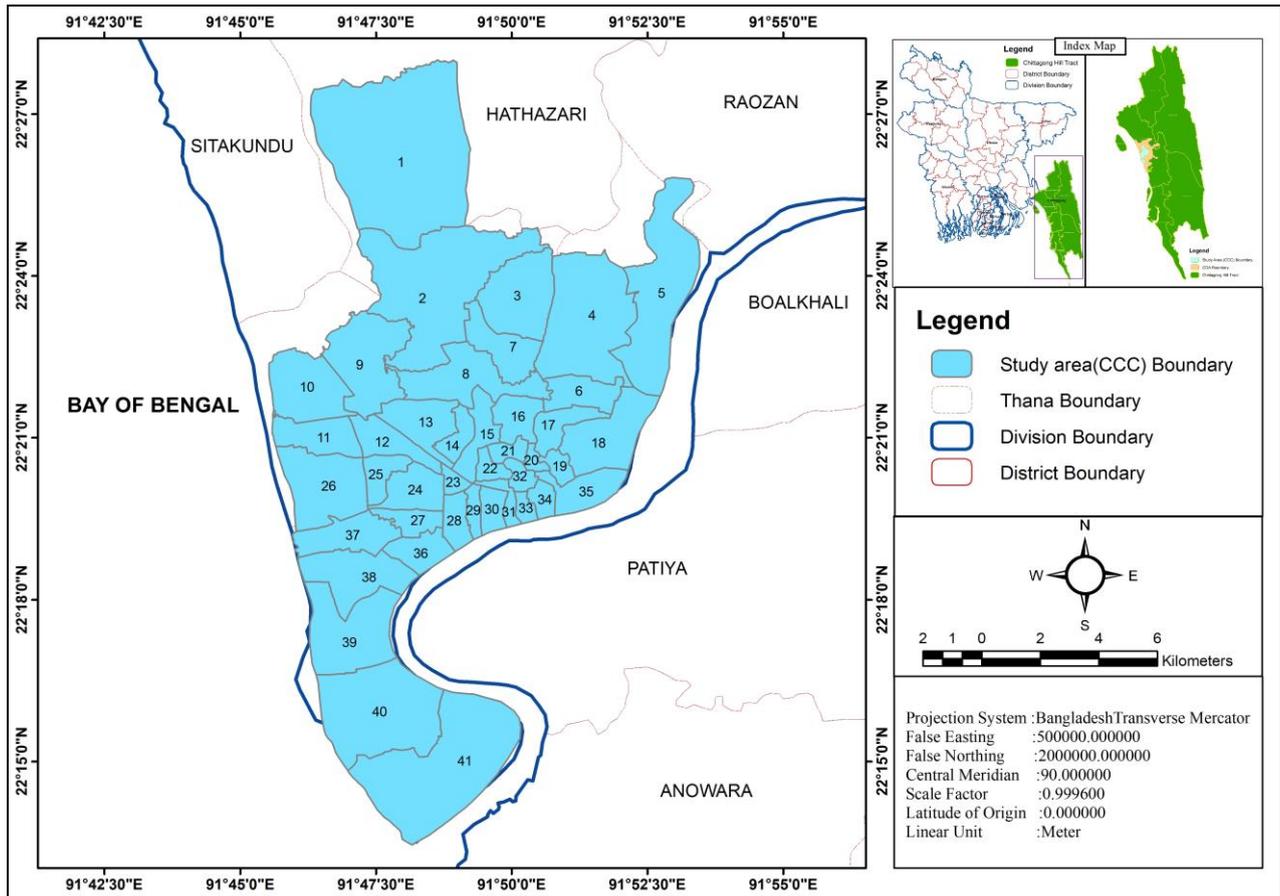

**Figure 1.** Location map of the study area (CCC).

## 2. Literature review

Landslide hazard models are the most powerful analytical and diagnostic tool for geomorphologists and decision makers to predict the spatial and temporal occurrence of mass movement. Most landslide hazard analysis take into account an up to date landslide inventory that represents the fundamental tool for identifying the hill slope instability factors that triggers landslide [5]. Reliability of the susceptibility maps depends mostly on the amount and quality of available data, the working scale and the selection of the appropriate methodology of analysis and modeling. The process of creating the maps involves several qualitative or quantitative approaches [6, 7]. Various geo-structural as well as causative factors based approaches have been proposed for landslide susceptibility zoning [8].

Expert opinions are used in the process of qualitative methods. Most common types simply examine landside inventory maps to identify sites of similar geological and geomorphological properties that are likely susceptible to failure. Some qualitative approaches, however, incorporate the idea of ranking and weighting, and may evolve to be semi-quantitative in nature. However, more sophisticated assessments involved techniques such as AHP, bivariate, multivariate, logistic regression, fuzzy logic, or artificial neural network (ANN) have been reported in recent years [9,10,11]. The application of the analytical hierarchy process (AHP) method [12] was widely used in landslide susceptibility mapping. Weighted linear combination (WLC) technique was reported in the study conducted by Ayalew et al.2004 [13]. Quantitative methods are based on numerical expressions of the relationship between controlling factors and landslide activity. There are two types of quantitative methods: deterministic

and statistical [14]. Within these techniques the probabilistic and statistical methods have been most commonly used in recent years. These method become much more popular using GIS and RS techniques [5]. Remote sensing and digital elevation models (DEMs) can be constituted as a feasible option for natural disaster control [6]. Several researchers have also used statistical techniques such as logistic regression [15]. All the statistical methods, despite the methodological and operational differences, are based on the common assumption that slope failure in the future will be more likely to occur under those conditions which led to past and present instability [16]. They mentioned some advantages and disadvantages of using different methods in different scales. So the quantitative techniques such as analytical hierarchy process (AHP) [17] can be utilized in this study.

Community vulnerability assessment tool (CVAT) was developed by NOAA coastal services center to support state and local governments to conduct community wide susceptibility assessments, in their efforts to reduce hazard susceptibility. The foundation for the methodology was established by the Heinz Center Panel on Risk, Susceptibility [18]. The Community vulnerability assessment Tool (CVAT) can be designed as a toolkit comprised of various climate changes adaptation tools, which, when used in a facilitated process, helps guide communities in looking at specific climate change issues [19]. CVAT differs from conventional susceptibility assessments in two important ways: (1) it addresses social as well as physical susceptibility and (2) it provides guidance on engaging people from the community who typically are not involved in disaster planning, but who often suffer the most as a result of disasters [20]. The assessment is best carried out through a process of meaningful and sustained community engagement to help ensure that the needs, capabilities and concerns of all groups, particularly those who are often under represented.

Landslide becomes a problem when they interfere with human lives, activities and properties. Though landslide have become a severe problem in hilly areas, significant number of poor and vulnerable people often resides in such environments, adopting typical socio-economic activities [21]. So the main objective of this study to assess the susceptibility of landslide occurrences in Chittagong city corporation area.

### **3. Methodologies and Data Processing**

The instability factors that can introduce severe landslides in some particular areas include surface and bedrock, lithology and structure, seismicity, slope, steepness, morphology, stream evolution, groundwater conditions, climate, vegetation cover, land use, and human activity [22]. In this study, ten major factors are considered according to the importance of the location and data availability such as elevation, slope aspect, slope angle, land cover, available vegetation (NDVI), distance to road, distance to water body, drainage density, geology and geomorphology.

Landslide hazard incident data are collected from field survey's to prepare the landslide hazard inventory map. Informal interview and open discussion has also been conducted with the authorities of different concerned organizations, experts and people living in susceptible areas of Chittagong city. The secondary data such as rainfall data, demographic data, satellite image (character of data shown in Table 2), Geology and Geomorphology data and different types of GIS data base on CCC are also collected from archives of different organization. Data procession and its sources have been described in the following part:

**Table 2.** Detailing of Landsat 8 and ASTER scene of CCC area. Source: US Geological Survey, 2013

Satellite Data	Year	Satellite	Sensor ID	Path & Row	Cell size (m)	Date DD/MM/YY	Output format	Cloud Coverage (%)
Landsat 8	2013	Landsat 8	OLI_TIR	136 & 45	30×30	1/12/2013	GEOTIFF	0
DEM	2013	ASTER	Global DEM	136 & 45	30×30	10/12/2013	GEOTIFF	5

All the collected data are converted to raster grid with (30 m × 30 m) cells and the raster grids are projected to Transverse Mercator (TM) using DWGS 1984 datum. The details of the data collection procedure and ways of preparing the thematic layers are described as follows:

### 3.1 Landslide inventory map

Landslide inventory is an essential part and basic information for any landslide zoning such as susceptibility, risk and hazard zonings [23]. A total of 20 landslide locations are identified in the study area through field survey and the latitude and longitude values are collected using a Hand GPS device. The 20 observed landslide locations in CCC are shown in Figure 2a.

### 3.2 Land cover map

Land cover data are generated from Landsat 8 (2013), collected from the Global visualization viewer (GLOVIS) of United States Geological survey (USGS) website. It has been prepared using the supervised classification techniques followed by knowledge-based expert classification systems depending on reference maps to improve the accuracy of the classification process [24, 25]. Five (5) major classes are taken such as sandy land, vegetation, water bodies, built-up area, paddy fields and shrubs (Figure 2b) and reference pixels are compared with the base map (2010) collected from the Chittagong development authority (CDA). The overall accuracy is found as 85.25% and overall Kappa Statistics is 0.8160 [26].


### 3.3 Normalized Difference Vegetation Index (NDVI) map

The normalized difference vegetation index (NDVI) is developed from the reflective bands of Landsat 8 satellite data for estimating available type of vegetation cover shown in Figure 2c. It has been prepared using the following Equation (1): [27].

$$NDVI = \frac{(IR - R)}{(IR + R)} \quad (1)$$

Where, IR=DN values from the infrared band (Band 5); R=DN values from the red band (Band 4).

The NDVI indices values range from -1.0 to 1.0, where higher values are for green vegetation and tiny values for other widespread surface resources. Bare soil is symbolized with NDVI values which are contiguous to 0 and water bodies are characterize with negative NDVI values [27, 28].

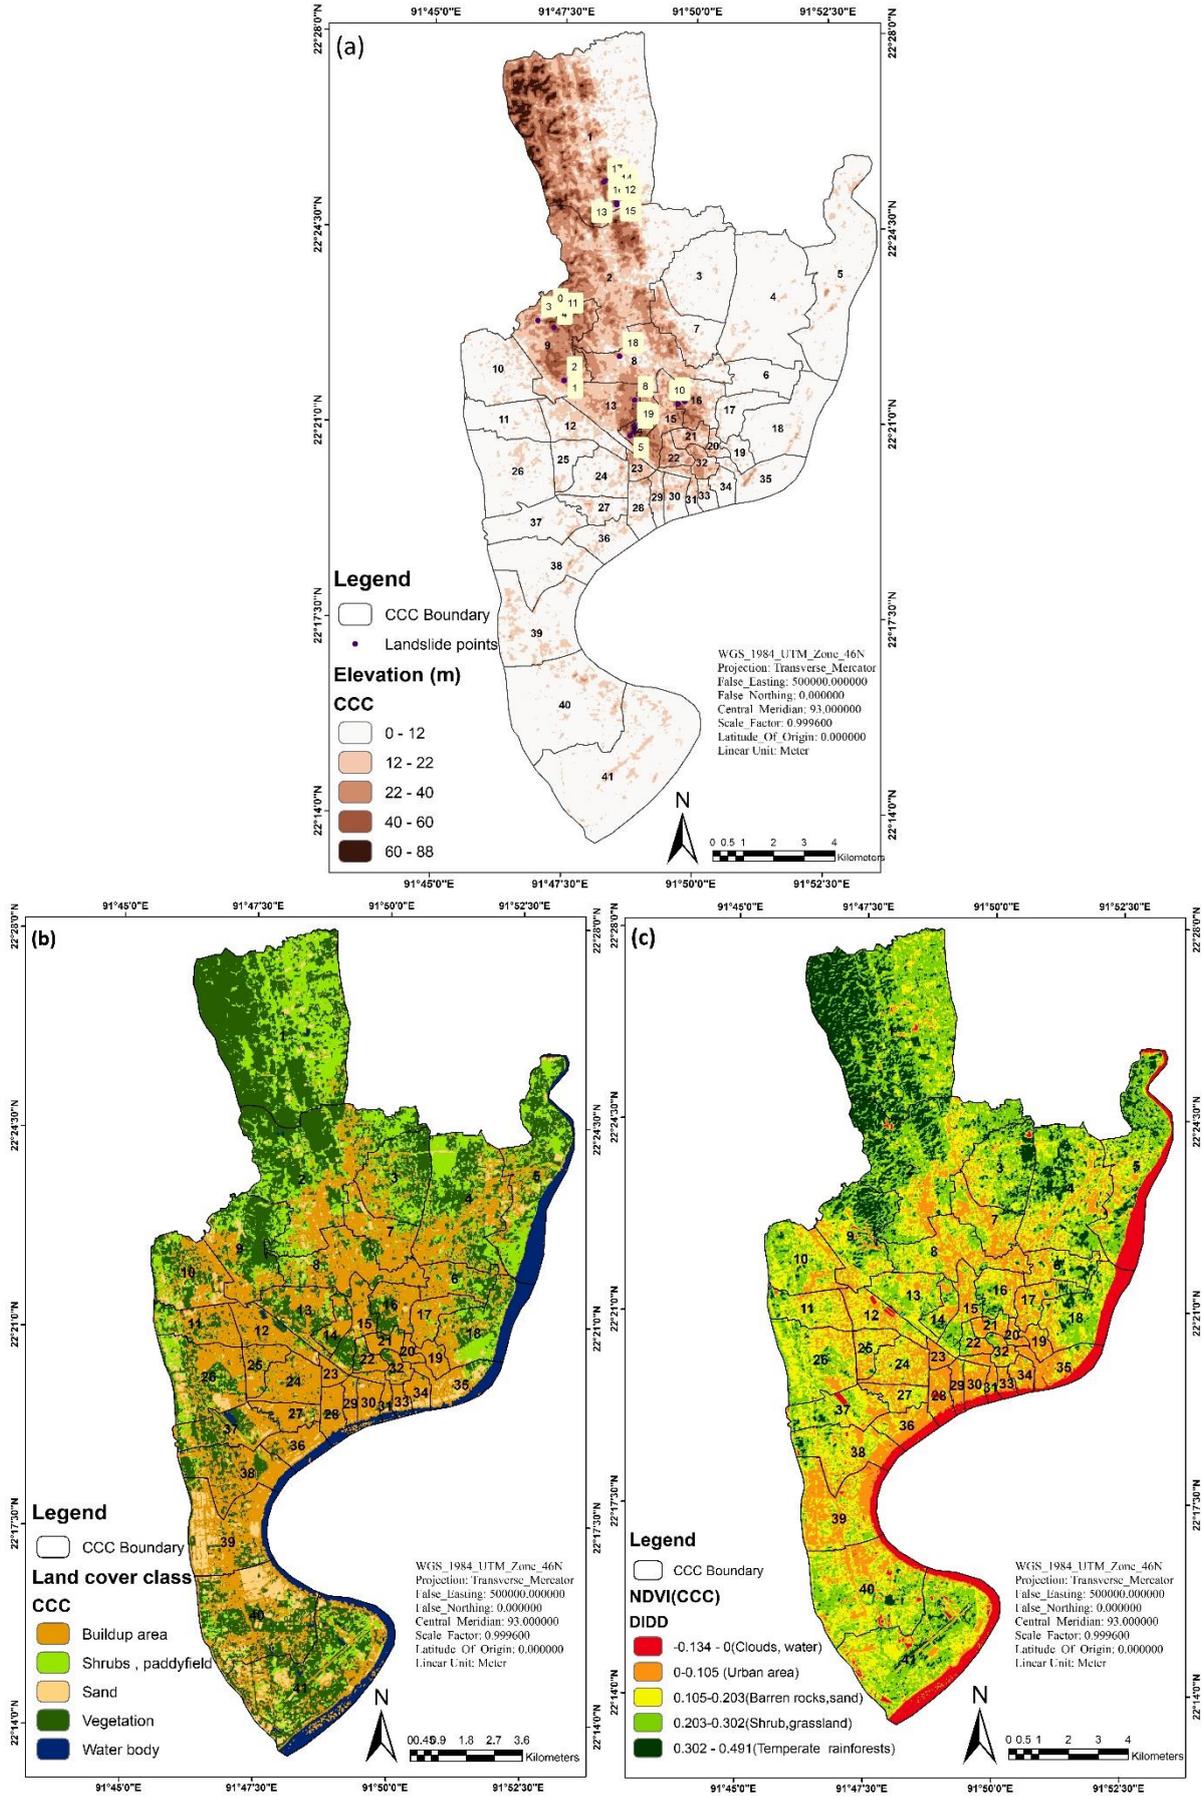


**Figure 2:** Landslide instability factors; **(a)** Observed landslide locations in CCC; **(b)** Land Cover map of CCC area and; **(c)** NDVI map of CCC area.

### 3.4 Slope

Slope has been generated from the raster DEM 30-meter contour interval obtained from USGS archive. The analyst tool identifies the slope (e.g., gradient, or rate of maximum change in z-value) from each cell of a raster surface. The output slope angle raster can be calculated as percent slope angle or degree of slope angle [27]. Generally steeper slope is more susceptible to landslide but most of the observed landslide occurrences in Chittagong were found within a slope range from 15-45 degrees [29], as shown in Figure 3a.

### 3.5 Aspect map

The aspect represents the down slope direction of the maximum rate of change in value from each cell to its neighbors [27]. Slope facing south, southwest, west receive maximum rainfall in Chittagong region [29]. Any slope faces maximum rainfall is more susceptible to landslide than others. Final results are reported in terms of the eight (8) basic compass directions shown in Figure 3b.

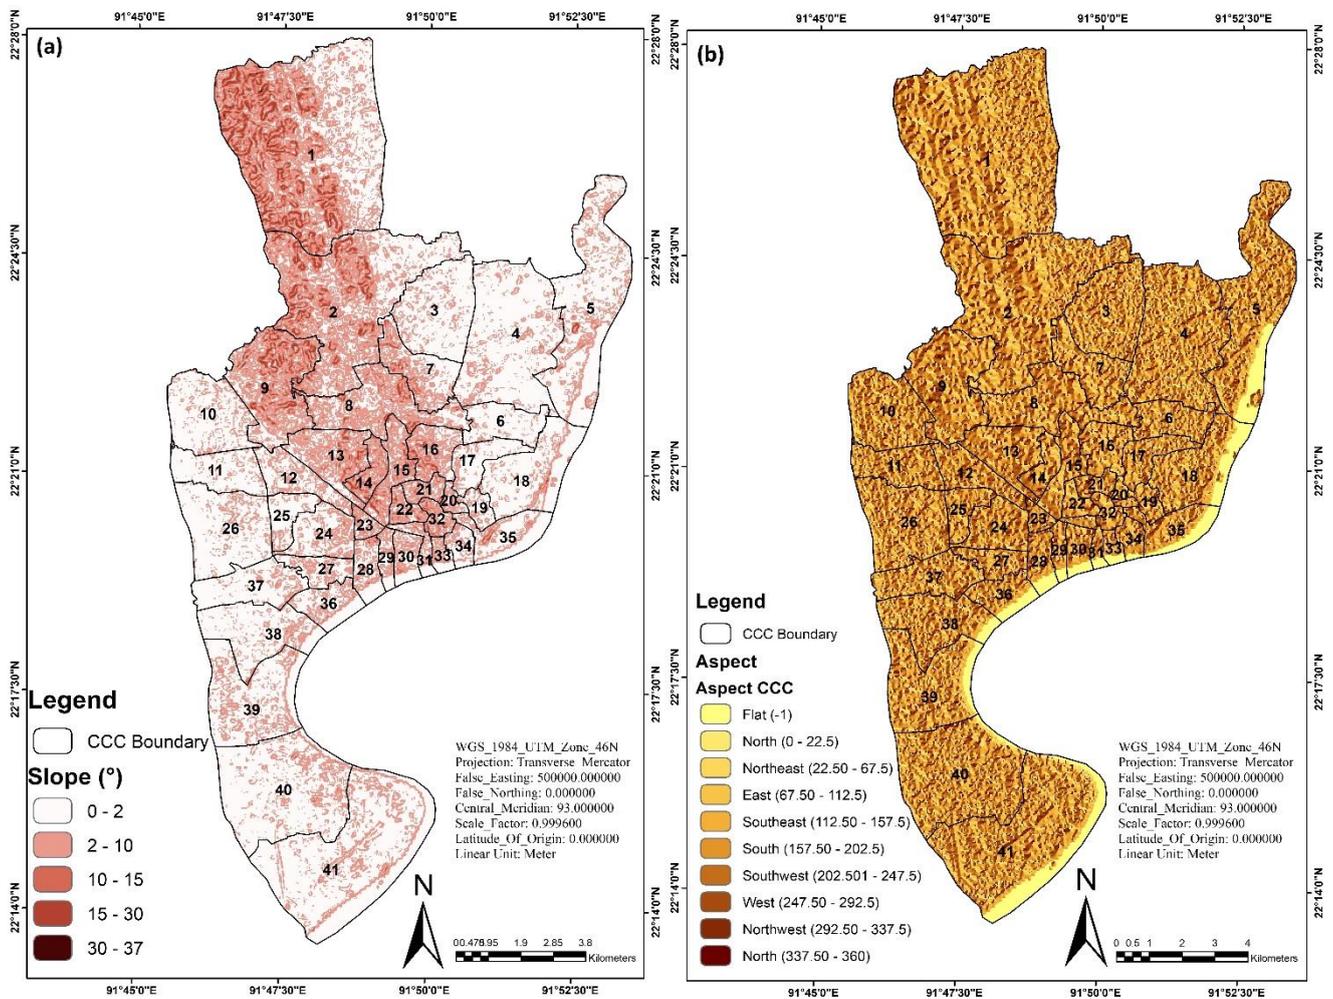


**Figure 3:** Landslide instability factors; (a) Slope map of CCC area; (b) Aspect map of CCC area.

### 3.6 Elevation map

The elevation map has been prepared from the DEM layer where the relative height of the layer is considered. Higher elevation is characterized by compacted sandstone in Chittagong city which is also resistance to sliding activity but moderate elevation of 8-12 m has high susceptibility for landslide occurrences [29], as shown in Figure 4a.

### 3.7 Distance to road

Landslides may occur on the road and on the side of the slopes affected by roads [30]. The distance from road classes closer to the road covered the higher percentage of landslide area while the classes far from the road had lowest percentage of landslide [31]. The distance from road network layer is prepared using 'Euclidean distance' technique which gives the distance from each cell in the raster to the closest source, shown in Figure 4b. Euclidean distance is calculated from the center of the source cell to the center of each of the surrounding cells, true Euclidean distance is calculated in each of the distance [27].

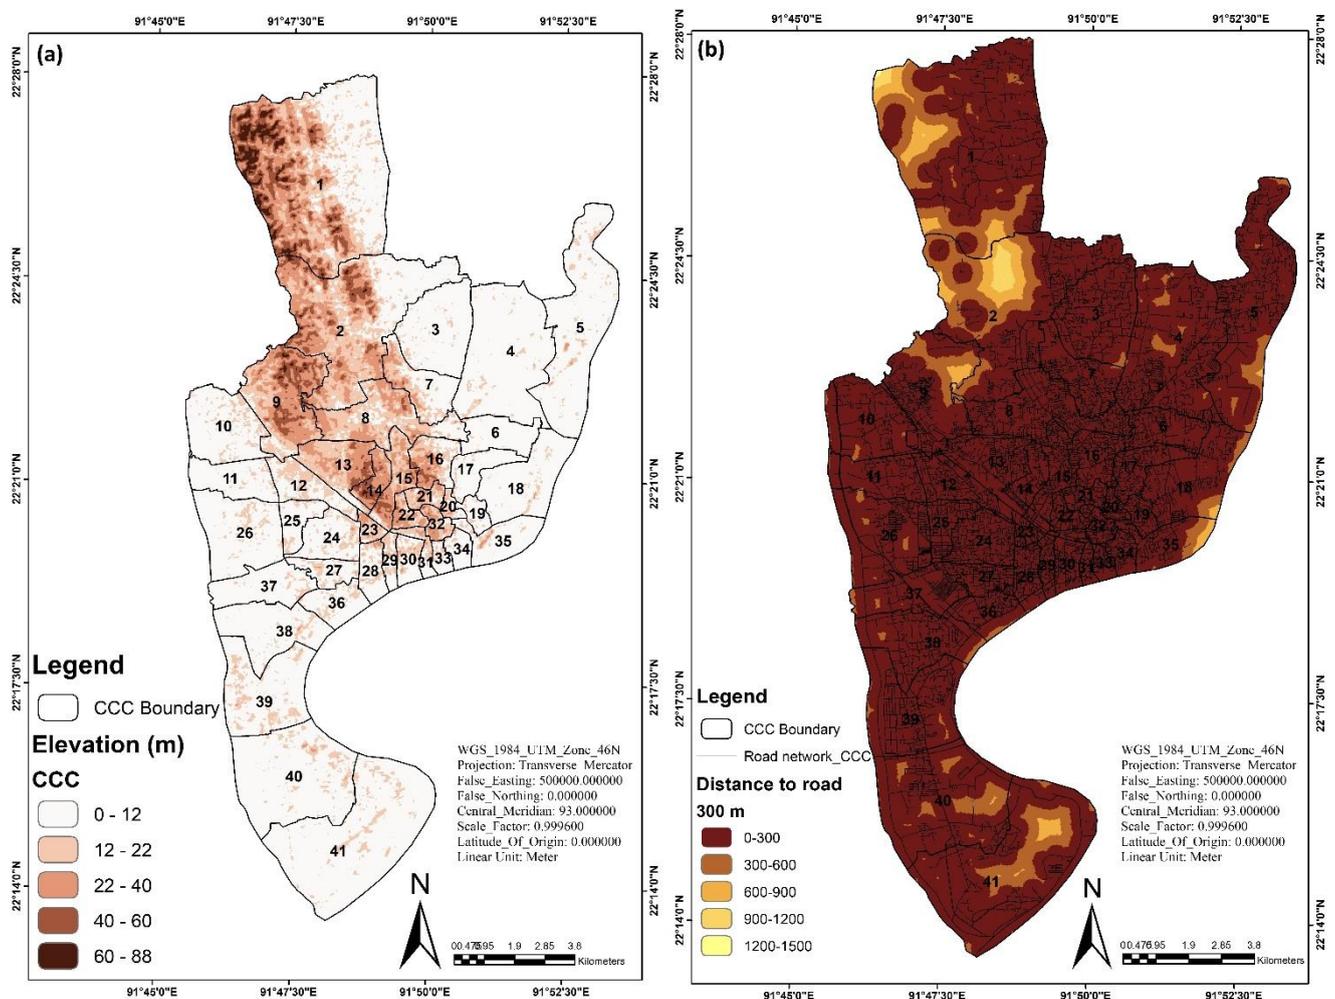


**Figure 4:** Landslide instability factors; (a) Elevation map of CCC area; (b) Distance to road map of CCC area.

### 3.8 Distance to water body

The area closer to the river and stream has high level of landslide susceptibility [32]. Euclidean distance [27] is also used to prepare distance to water body layer map at 200 meter intervals (Figure 5a).

### 3.9 Drainage density

DEM data is used to prepare Drainage density map. The presence of stream line influences stability by toe erosion or by saturating the toe material or both [33]. The distances from stream line of 100m intervals is produced using Euclidean distance [27] technique, as shown in Figure 5b.

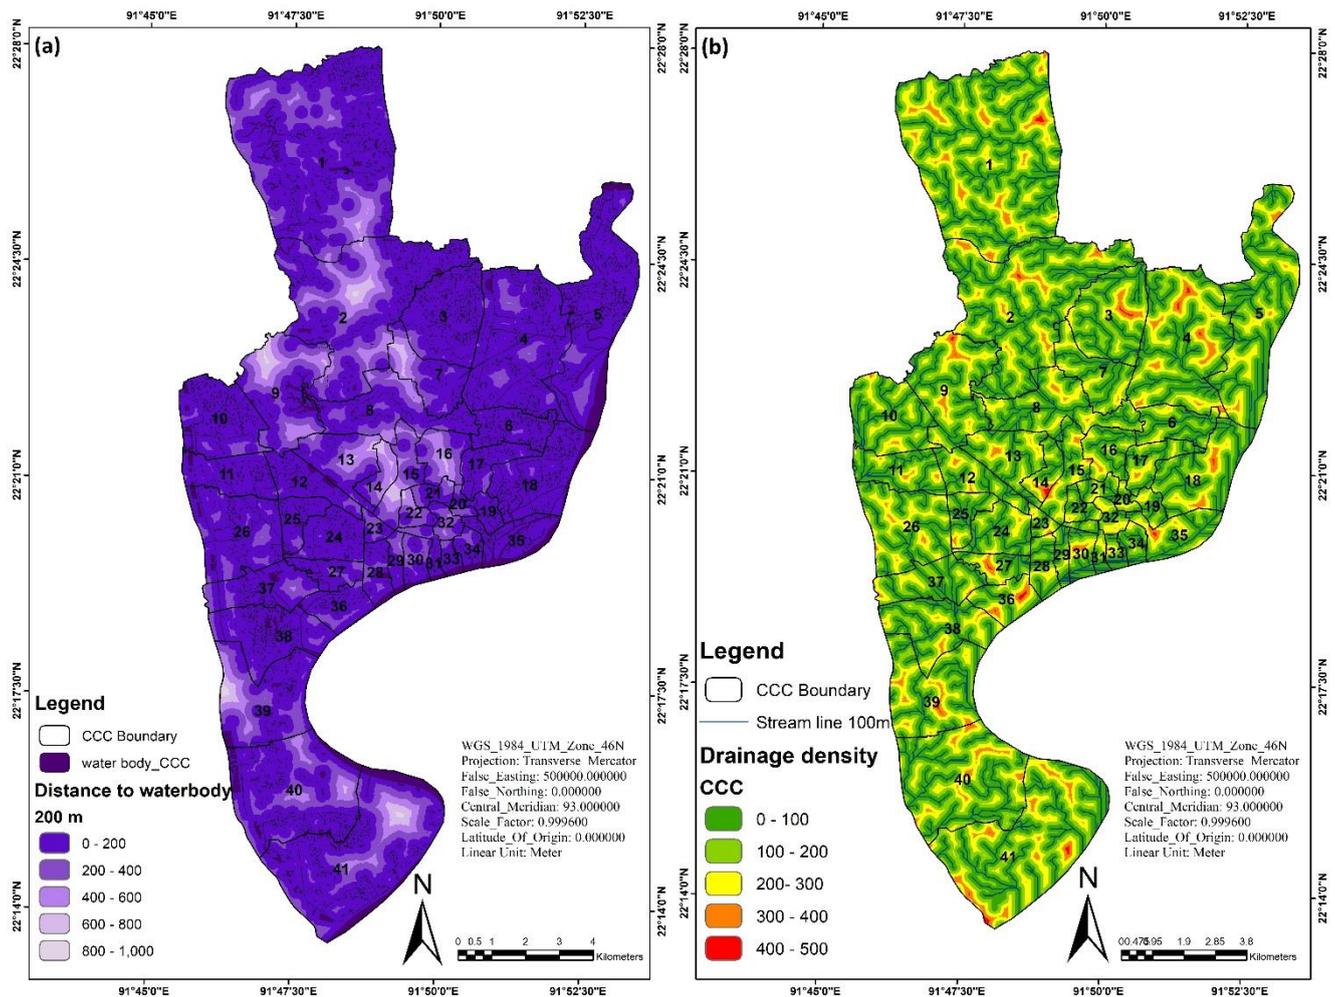


**Figure 5:** Landslide instability factors; (a) Distance to water body map of CCC area; (b) Drainage density map of CCC area.

### 3.10 Geology and Geomorphology

Geology and Geomorphology data are collected from Geological Survey of Bangladesh (GSB). The highest preference are given to the geologic formations of slope and valley deposit where majority of landslides had previously occurred (Figure 6a).

The geomorphologic data are also classified into four classes and according to expert opinions, hilly landforms are most susceptible to landslide occurrences shown in Figure 6b.

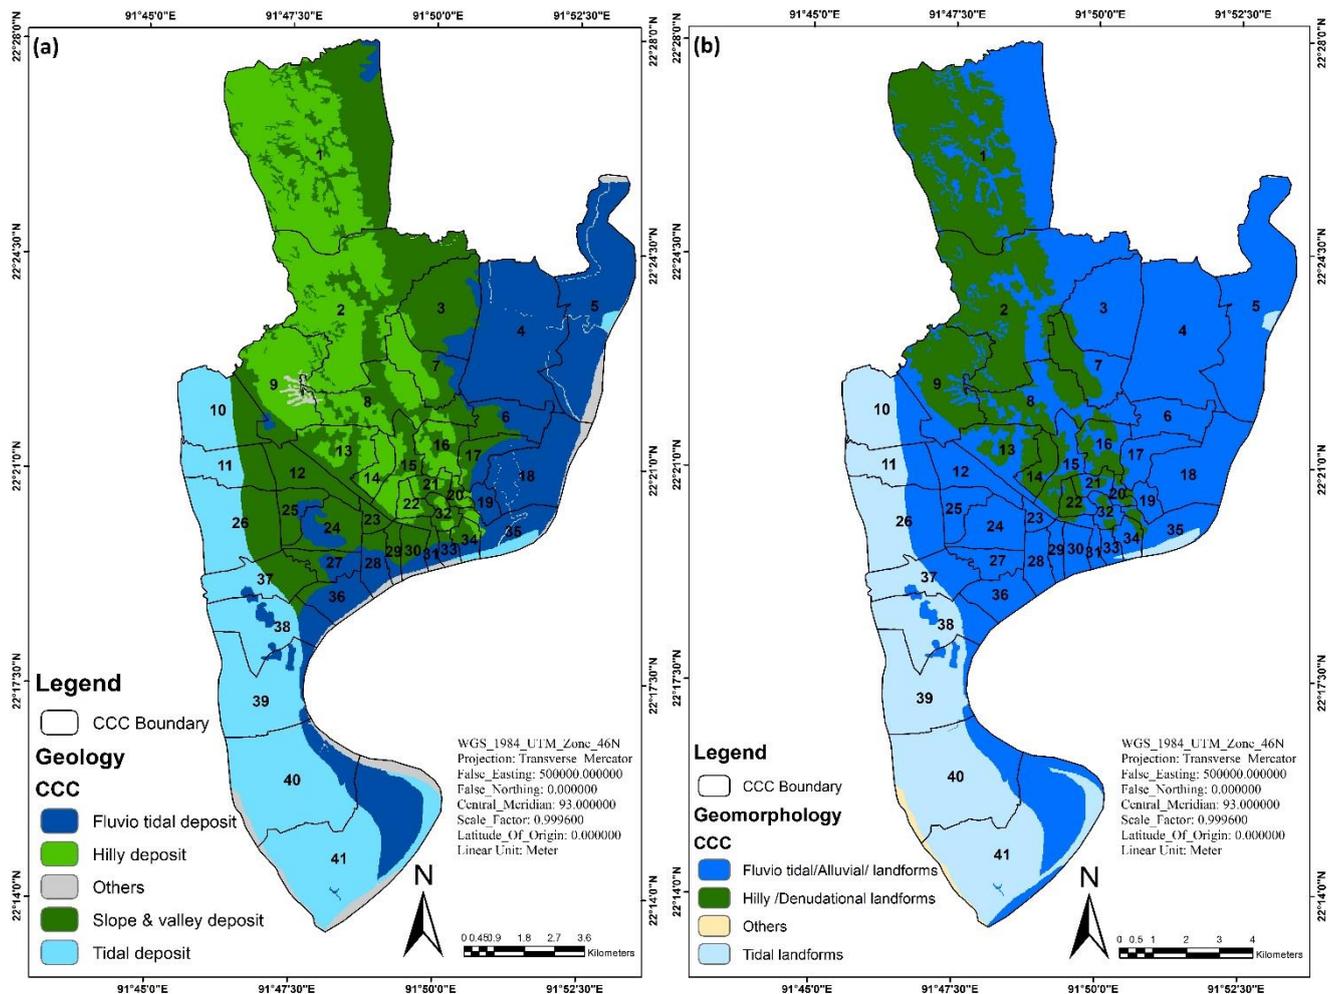

**Figure 6:** Landslide instability factors; (a) Geology map of CCC area; (b) Geomorphology map of CCC area.

### 3.11 Precipitation

Due to climate change, CCC is experiencing high intensity of rainfall in recent years which is making the landslide situation worse [34]. Previous ten years (2003-2013) of precipitation data has been collected from Bangladesh Metrological Department [35] and the average daily precipitation of the whole CCC area is more or less same. Besides the study areas are too small and there is only one weather station installed in this area. So the triggering effect of the precipitation factor is assumed to be uniform.

The demographic data such as population distribution, gender, age group on CCC area collected from Bangladesh bureau of statistics (BBS) [36] and the GIS data base (physical facilities, critical facilities, economic facilities, environmental risk sites *etc.*) for CCC area have also been collected from Chittagong development authority (CDA).

### 3.12 Analytical hierarchy process (AHP)

Analytical hierarchy process (AHP) method is a multi-factor decision-making process which is used to derive the weights associated with suitability/attribute map layers [17]. AHP involves building a hierarchy of decision elements (factors) and then making comparisons between possible pairs in a matrix to give a weight for each element and also a consistency ratio [37]. Factor weights for each criterion are determined by a pair wise comparison matrix [17, 38]. In the construction of a pair wise comparison matrix, each factor is rated against every other factor by assigning a relative dominant value between 1 and 9 to the intersecting cell, shown in Table 3. When the factor on the vertical axis is more important than the factor on the horizontal axis, this value varies between 1 and 9. Conversely, the value varies between the reciprocals 1/2 and 1/9. Since we have used ten parameters, the comparison matrix has 100 boxes. The diagonal boxes of a pair-wise comparison matrix always take ascertain value of 1. The boxes in the upper and lower halves are symmetrical with one another and the corresponding values are, therefore, reciprocal with each other. The CR is a ratio between the matrix's consistency index and random index and in general ranges from 0 to 1. The consistency ratio (CR) is obtained by comparing the consistency index (CI) with average random consistency index (RI). The consistency ratio (CR) is defined in Equation (2):

$$CR = \frac{CI}{RI} \quad (2)$$

A CR close to 0 indicates the high probability that the weights were generated randomly [17]. The consistency index (CI) of a matrix of comparisons can be calculated through Equation (3):

$$\text{Consistency index (CI)} = \frac{(\lambda_{max} - n)}{n - 1} \quad (3)$$

**Table 3.** Scale of preference between two parameters in AHP [17].

Scales	Degree of preferences	Explanation
1	Equally	Two activities contribute equally to the objective
3	Moderately	Experience and judgment slightly to moderately favor one activity over another.
5	Strongly	Experience and judgment strongly or essentially favor one activity over another.
7	Very strongly	An activity is strongly favored over another and its dominance is showed in practice.
9	Extremely	The evidence of favoring one activity over another is of the highest degree possible of an affirmation.
2,4,6,8	Intermediate values	Used to represent compromises between the preferences in weights 1, 3, 5, 7 and 9.
Reciprocals	Opposites	Used for inverse comparison.

In this study, AHP considers weighting and rating system developed by collecting questionnaires from expert opinions and secondary data sources. The class weightage and the factor weightage are multiplied each other to produce a combined weightage map of landslide susceptibility as Equation (4):

$$SI = \sum_{i=1}^n (W_i \times R_i) \quad (4)$$

Where, SI is the required susceptibility index of the given pixel.

$R_i$  and  $W_i$  are class weight (or rating value) and factor weight for factor  $i$  respectively.

The weightage maps are classified into five (5) classes using Natural breaks (Jenks) classification method characterized by very high, high, medium, low and very low susceptibility. Natural breaks classes are based on natural groupings inherent in the data. Class breaks are identified that best group similar values and that maximize the differences between classes. Natural breaks are data-specific classifications which is used for this study purpose [27]. Validity of the map was examined using 20 known landslide locations within the area obtained from the field surveys and from official records of the responsible authorities.

Landslide susceptibility assessment for CCC area has been carried out through Community susceptibility assessment Tool (CVAT). Landslide susceptibility analysis for CCC area has also been divided into five segments naming physical susceptibility analysis, critical facilities susceptibility analysis, social susceptibility analysis, economic susceptibility analysis and environmental susceptibility analysis. The first step involved with physical susceptibility analysis of all types of road and residential structures which are located in landslide hazard prone areas. The physical structures location is overlaid over the map of land slide susceptible areas and the physical susceptibility analysis map is prepared. Then critical facilities (community services, education and research, service activity) and economic facilities (commercial activities, manufacturing and processing) that are within close proximity to susceptible areas are identified by overlying the critical facilities from GIS data location over the map of landslide susceptible areas. Social susceptibility can be analyzed through special consideration areas which are identified by population distribution, gender, age group of people and literacy rate *etc.* For environmental susceptibility analysis include dense forest, shrubs and water body's areas, which are considered to determine the potential threat to environment for landslide hazard.

#### 4. Landslide susceptibility mapping and discussion

Landslide susceptibility mapping consists of the derived factor weights and class weights, and a calculated CR, as seen in Table 4. In this research, the resulting CR for all the cases is found less than 0.10 (Table 4 and Table 5). From Table 6, it is found that the LSI had a minimum value of 0.053, and a maximum value of 0.457, with an average value of 0.162 and a standard deviation of 0.061. The LSI represents the relative susceptibility of a landslide occurrence. These LSI values are then divided into five classes based the natural breaks range [27], which represent five different zones in the landslide susceptibility map showing in Figure 7, Only 11% of the total areas are classified as being in the VHS (4%) or HS (7%) landslide susceptibility zones but they have accommodated about 80% of the landslide reference points. Other areas are located in the MS (18%), LS (39%), and VLS (33%) susceptibility zones and only 4 landslide incidences (out of 20) are being observed in the MS zones.

**Table 4.** Pairwise comparison matrix, consistency ratio and weights of the sub-criteria of the data layers.

<b>Factors</b>	<b>(1)</b>	<b>(2)</b>	<b>(3)</b>	<b>(4)</b>	<b>(5)</b>	<b>Eigen values</b>
<b>Land cover</b>						
(1)Water body	1					0.0375
(2)Vegetation	7	1				0.2959
(3)Urban Area	5	1/3	1			0.1357
(4)Paddy Field	2	1/6	1/3	1		0.0589
(5)Bare Soil	9	2	5	7	1	0.4721
Consistency ratio : 0.05						
<b>Slope angle (°)</b>						
(1) 0 - 2	1					0.0502
(2) 2-10	2	1				0.0809
(3) 10-15	4	2	1			0.1407
(4) 15-30	7	6	5	1		0.5146
(5) 30-37	4	3	2	1/3	1	0.2137
Consistency ratio :0.04						
<b>Slope aspect</b>						
(1) South, South-west	1					0.5489
(2)West, north-west	1/2	1				0.2901
(3)North, south-east	1/6	1/3	1			0.1019
(4)East, north-east	1/8	1/5	1/2	1		0.0591
Consistency ratio : 0.008						
<b>Elevation (m)</b>						
(1) 0-12	1					0.0453
(2) 12-22	2	1				0.0756
(3) 22-40	4	2	1			0.1423
(4) 40-60	8	6	4	1		0.5000
(5) 60-88	5	4	2	1/3	1	0.2368
Consistency ratio : 0.03						
<b>NDVI</b>						
(1) 0.134773 - 0	1					0.0436
(2) 0 - 0.105841	9	1				0.4745
(3) 0.105841 - 0.203147	6	1/2	1			0.2935
(4) 0.203147 - 0.302287	2	1/7	1/5	1		0.0683
(5) 0.302287 - 0.491584	3	1/4	1/3	2	1	0.1200
Consistency ratio : 0.02						
<b>Distance to road (m)</b>						
(1) 0-300	1					0.5424
(2) 300-600	1/3	1				0.2381
(3) 600-900	1/6	1/3	1			0.0969
(4) 900-1200	1/8	1/5	1/2	1		0.0757
(5) 1200-1500	1/9	1/4	1/2	1/3	1	0.0470
Consistency ratio: 0.06						
<b>Distance to water body(m)</b>						
(1) 0-200	1					0.5096
(2) 200-400	1/3	1				0.2367
(3) 400-600	1/5	1/2	1			0.1275
(4) 600-800	1/6	1/4	1/2	1		0.0765

Table 4. *cont.*

<b>Factors</b>	<b>(1)</b>	<b>(2)</b>	<b>(3)</b>	<b>(4)</b>	<b>(5)</b>	<b>Eigen values</b>
(5) 800-1000	1/7	1/5	1/3	1/2	1	0.0497
Consistency ratio : 0.04						
<b>Drainage density (m)</b>						
(1) 0 - 100	1					0.0519
(2)100-200	2	1				0.0880
(3)200-300	3	2	1			0.1423
(4)300-400	5	3	2	1		0.2562
(5)400-500	7	5	4	2	1	0.4616
Consistency ratio : 0.01						
<b>Geomorphology</b>						
(1)Fluvio tidal/Alluvial/Depositional landforms	1					0.1084
(2) Hilly /Denudational landforms	6	1				0.6273
(3) Others	1/2	1/8	1			0.0610
(4) Tidal landforms	2	1/4	4	1		0.2033
Consistency ratio : 0.03						
<b>Geology</b>						
(1) Fluvio tidal deposit	1					0.0666
(2) Hilly deposit	5	1				0.2856
(3) Others	1/2	1/7	1			0.0407
(4) Slope & valley deposit	6	2	9	1		0.4456
(5) Tidal deposit	3	1/2	4	1/3	1	0.1615
Consistency ratio : 0.02						

The frequency ratio (FR) values are computed from ratio of the percentage landslide occurrences and the percentage area coverage (for each individual class to the whole study area).The possible values begin from 0 onwards where relatively high ones (much greater than 1) indicate high chance of having landslides while low values (close to 0) indicate lower chance of having landslide over the area.The FR values of 11.832 for the VHS zone and 5.289 for the HS zone indicate the higher chance of having landslide activities in these areas when compared to those of the MS (1.142) and LS (0), as shown in Table 6.

**Table 5.** Pair wise comparison matrix, factor weights and consistency ration of the data layers.

<b>Data layers</b>	<b>(1)</b>	<b>(2)</b>	<b>(3)</b>	<b>(4)</b>	<b>(5)</b>	<b>(6)</b>	<b>(7)</b>	<b>(8)</b>	<b>(9)</b>	<b>(10)</b>	<b>Eigen values</b>
Land Cover (1)	1										0.0629
Slope (2)	4	1									0.1995
Aspect (3)	1/2	1/5	1								0.0361
Elevation (4)	5	2	6	1							0.2575
NDVI (5)	2	1/3	3	1/4	1						0.0787
Distance to road (6)	1/5	1/8	1/3	1/9	1/4	1					0.0179
Distance to waterbody(7)	1/3	1/7	1/2	1/8	1/3	2	1				0.0252
Drainage density (8)	1/2	1/5	2	1/6	1/2	3	2	1			0.0445
Geomorphology (9)	2	1/2	4	1/2	2	7	6	3	1		0.1233
Geology (10)	3	1/2	5	1/2	2	7	6	4	2	1	0.1545
<b>Consistency ratio : 0.03</b>											

**Table 6.** Allocation of the reference landslide points within the defined landslide susceptibility class and the associated frequency ratio (FR) of each class.

Susceptibility classes	Susceptibility index values	Susceptible area (km)	% of Area	Number of landslide points	Frequency ratio (FR)
Very low susceptibility (VLS)	0.053 - 0.130	57.11	33	0 (0%)	0.000
Low susceptibility (LS)	0.130 - 0.189	67.58	39	0 (0%)	0.000
Moderate susceptibility (MS)	0.189 - 0.233	30.29	18	4 (20%)	1.142
High susceptibility (HS)	0.233 - 0.316	11.45	7	7 (35%)	5.289
Very high susceptibility (VHS)	0.316 - 0.454	6.58	4	9 (45%)	11.832

The very high susceptible landslide locations in CCC area are identified as (e.g., *Lebubagan* area, *kusumbag* residential area, *Batali hill* area, *Motijharna* area, *Foy's Lake* area, *Khulshi* area, *Nasirabad* area, *Goalpara* slum, *kanandhara abasik prokolpo*). Among those locations, (e.g., *Motijorana* area and *Batali Hill*) are considered as the most susceptible locations in CCC. These areas are also heavily populated and occupied by lower income groups. Most of the inhabitants are poor factory workers. Any large scale landslide can cause massive destruction to these areas and cause death of many people. Since landslide occurrences only recorded in the very high and highly susceptible areas in CCC, the very high, high and moderate susceptible areas are taken in this research for susceptibility analysis process.

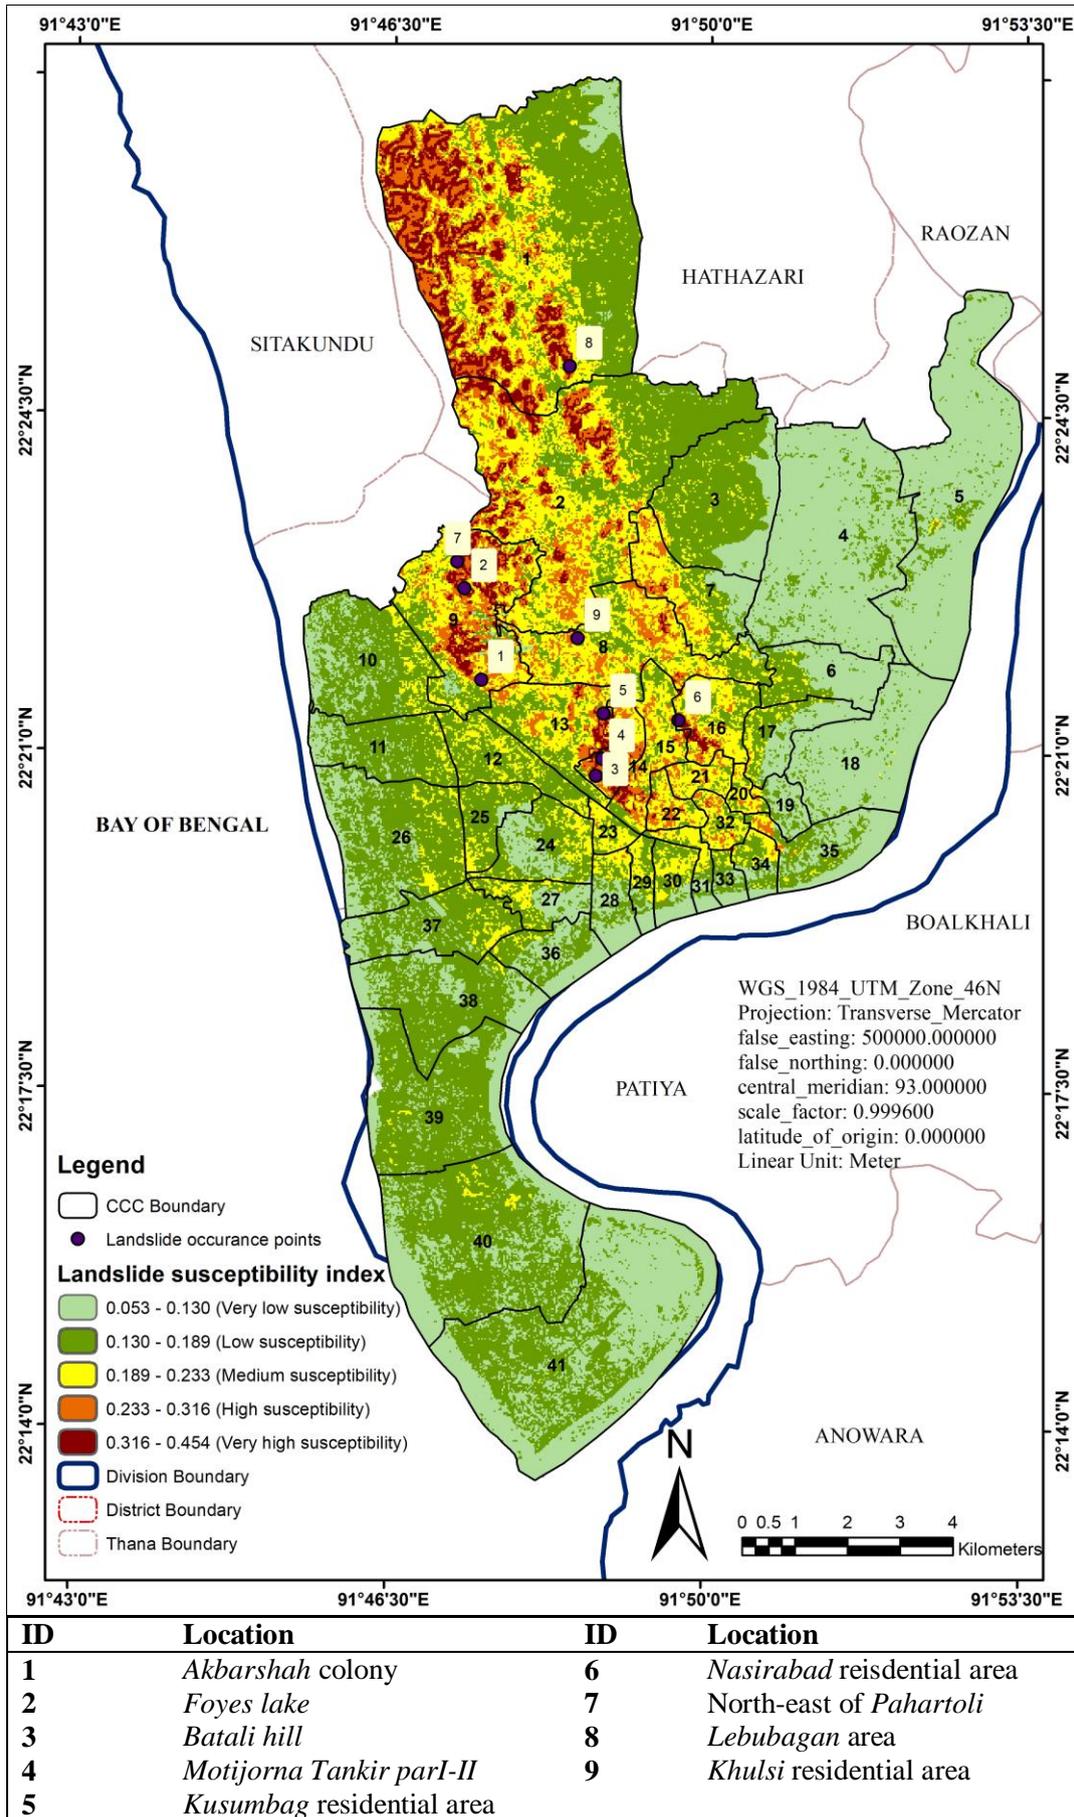


Figure 7. Landslide susceptibility map of CCC area.

## 5. Susceptibility analysis and results


The susceptibility analysis is conducted based on the area located from landslide susceptibility mapping process. Involving the community in the preparation of the susceptibility assessment can improve its effectiveness and ensure that the assessment is relevant to those who are the most at risk.

### 5.1 Physical susceptibility analysis

Physical susceptibility to landslide hazard is divided into two separate segments naming infrastructural susceptibility and road susceptibility for CCC area.

#### 5.1.1 Infrastructural susceptibility

The total numbers of residential structures in the CCC area are 186006, among which 71991 structures are found susceptible due to landslide hazard. Among all the susceptible structures in CCC, 7% are found very high susceptible, 21% high susceptible and 72% are also found medium susceptible, shown in Figure 8. The formation of informal settlements (generally termed “slums”) on hill slopes with unplanned hill-cutting are the main cause of susceptibility to landslides [39].

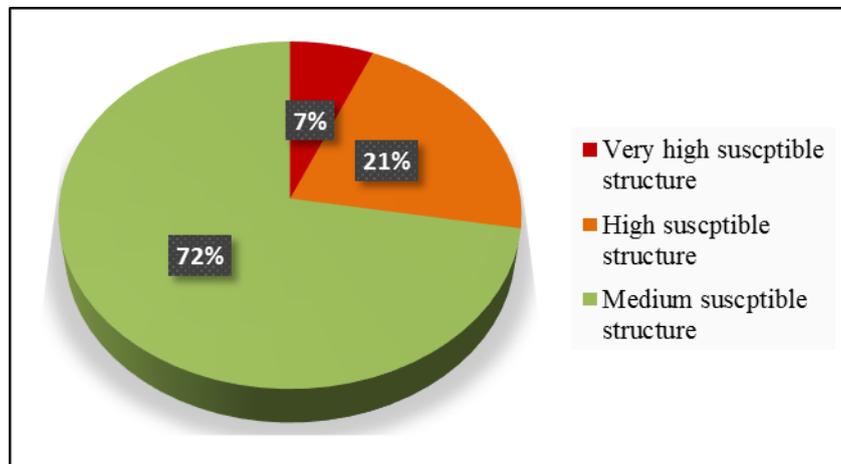


**Figure 8.** Percentage of total residential structure susceptible to landslide.

*Motijorna Tankir par* and *kusumbag*, *Badsha mia* road area are the most susceptible locations for landslide occurrences which are mostly constructed on illegally occupied lands, mostly in hilly regions of CCC area.

#### 5.1.2 Road susceptibility

The entire CCC area is covered by network of roads such as *pucca*, *semi-pucca* and *kacha* road. The total area also is served by 2888 km of road (using Bangladesh Transverse Mercator projection), among them approximately 806 km of road have been found susceptible. About 5% (43.36 km) of susceptible roads are very highly and more than 95% (800 km) of roads are highly to medium susceptible to landslide hazard shown in Figure 9. Approximately more than 13 km of *katcha* road is identified as severely susceptible. The medium susceptible road occupies the larger portion of the road network.

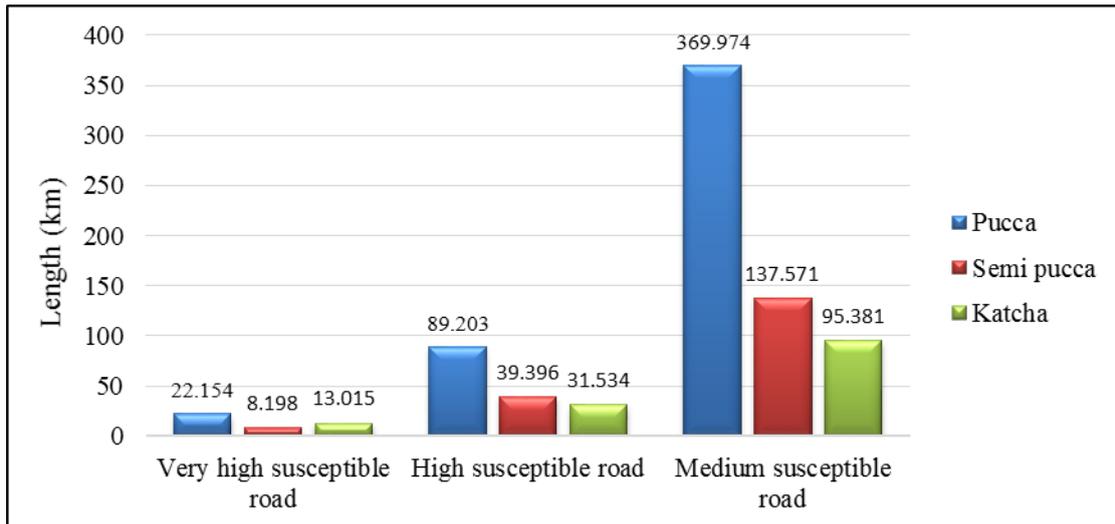


**Figure 9.** Road susceptibility to landslide hazard.

The roads located in very highly to highly susceptible areas such as *Motijorna Tankir par I-II* and *Batali hill* road are very much threatened by landslide hazard, as shown in Figure 10. The road locations that are susceptible to landslide hazard are given in Table 7.

**Table 7:** Road locations very highly susceptible to landslide in CCC area.

ID	Location	ID	Location
1	<i>Akbarshah colony</i> road	5	<i>Kusumbag</i> residential area road
2	<i>Gazjr matha (Biswa colony)</i> B block	6	<i>Badsha mia</i> road
3	<i>Batali hill</i> road	7	<i>Mukul ahmed</i> primary school
4	<i>Motijorna Tankir par I-II</i>		

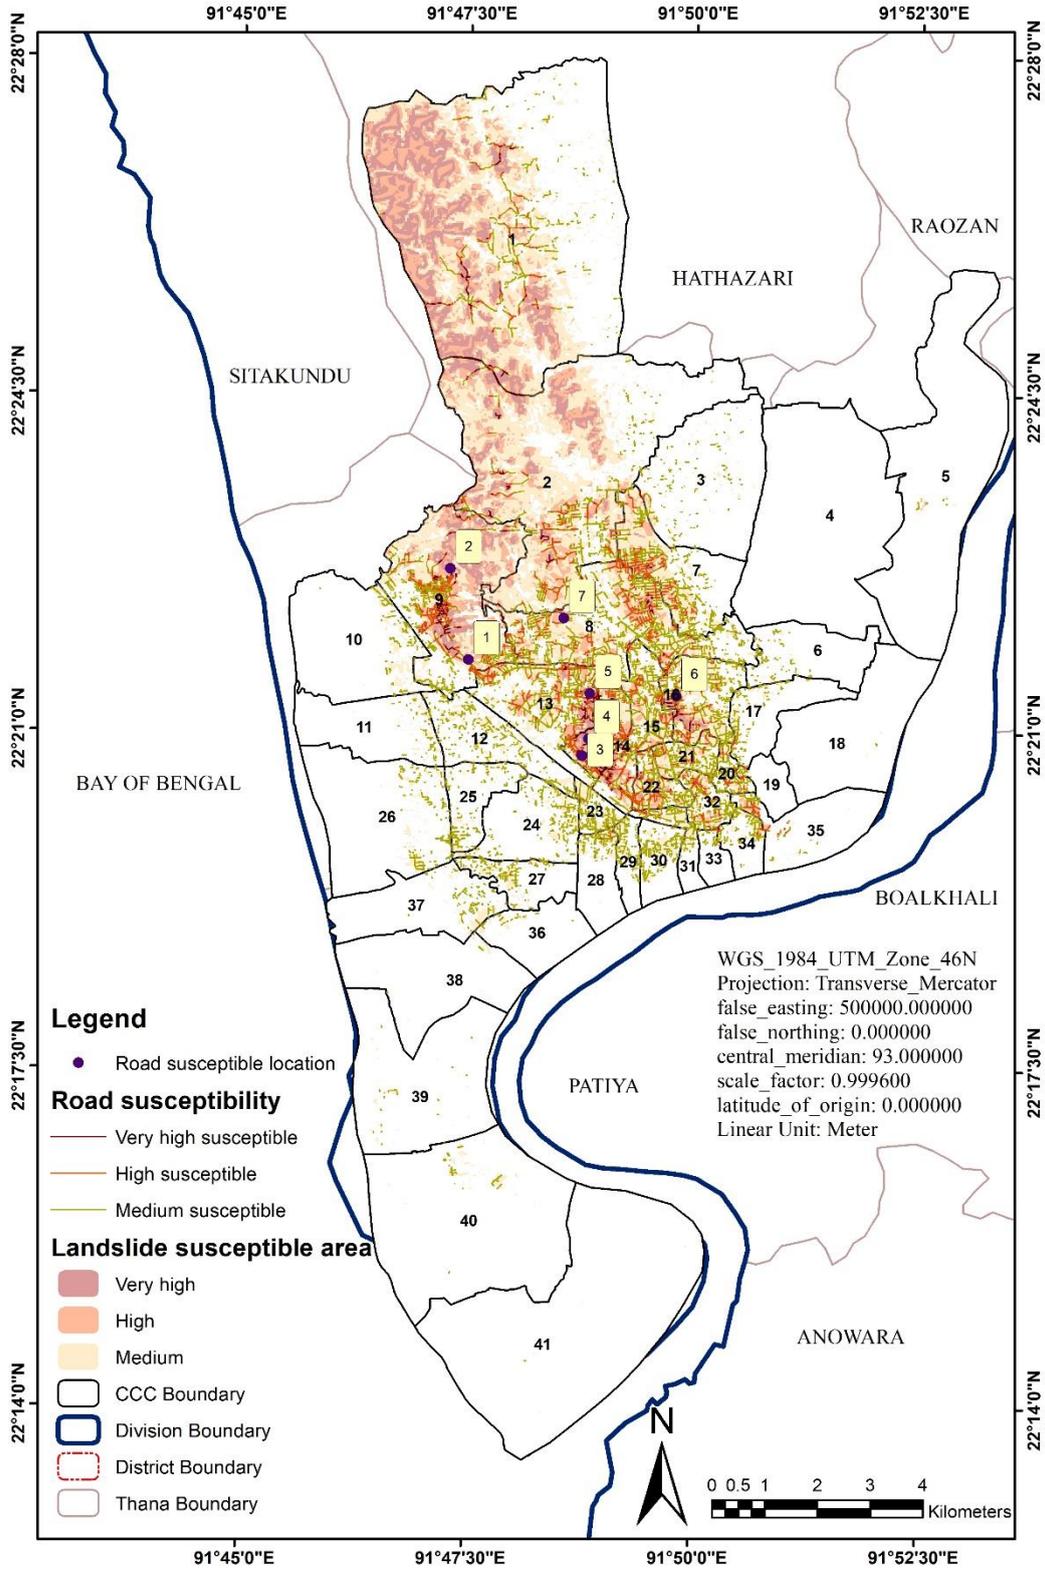

**Figure 10.** Road susceptibility map of CCC area.

*5.2 Critical facilities susceptibility analysis*

The critical facilities susceptibility analysis includes community service, education and research institute, service activity, transport and communication facilities of CCC area. The total numbers of

very high susceptible critical facilities are 144 (Table 8), which is 4% of total critical facilities in CCC area. Accordingly, the high susceptible critical facilities are found as 636 (19%) and medium susceptible critical facilities are 2648 (77%), among which the education and research and service activity facilities possesses higher susceptibility to landslide occurrences. The overall number of educational institutions in CCC area are 1437, among those, 51 educational institutions are very highly and 737 are highly affected and 30 service oriented structures are very highly susceptible to landslide hazard, also shown in Table 8.

**Table 8.** Number of susceptible critical facilities.

Susceptibility	Type of facilities	Number of susceptible critical facilities	Percent age
Very high susceptible critical facilities	Community Service	59	<b>4%</b>
	Education & Research institute	51	
	Service Activity	30	
	Transport & Communication	4	
<b>Total very high susceptible critical facilities</b>		<b>144</b>	
High susceptible critical facilities	Community Service	194	<b>19%</b>
	Education & Research institute	198	
	Service Activity	217	
	Transport & Communication	27	
<b>Total high susceptible critical facilities</b>		<b>636</b>	
Medium susceptible critical facilities	Community Service	758	<b>77%</b>
	Education & Research institute	737	
	Service Activity	1055	
	Transport & Communication	98	
<b>Total medium susceptible critical facilities</b>		<b>2648</b>	

Important critical facilities found in (e.g., Ward no 2, 9, 14, 15, 16) are very highly susceptible to landslide, shown in Figure 11. The critical facilities that are found very highly susceptible to landslide hazard are given in Table 9.

**Table 9:** Critical facilities very highly susceptible to landslide in CCC area.

ID	Location	ID	Location
1	<i>Polo ground</i> High School	5	<i>Tiger Pass</i> Naval Auditorium
2	<i>Railway</i> Security Training Center	6	<i>Moti Zharna</i> Mosque
3	<i>Govt. Charucola</i> College	7	<i>Panora</i> Hospital
4	<i>Zamiatul Ulum Al-Islami</i> Madrasa	8	<i>Lalkhan Bazar</i> Ward Commissioner


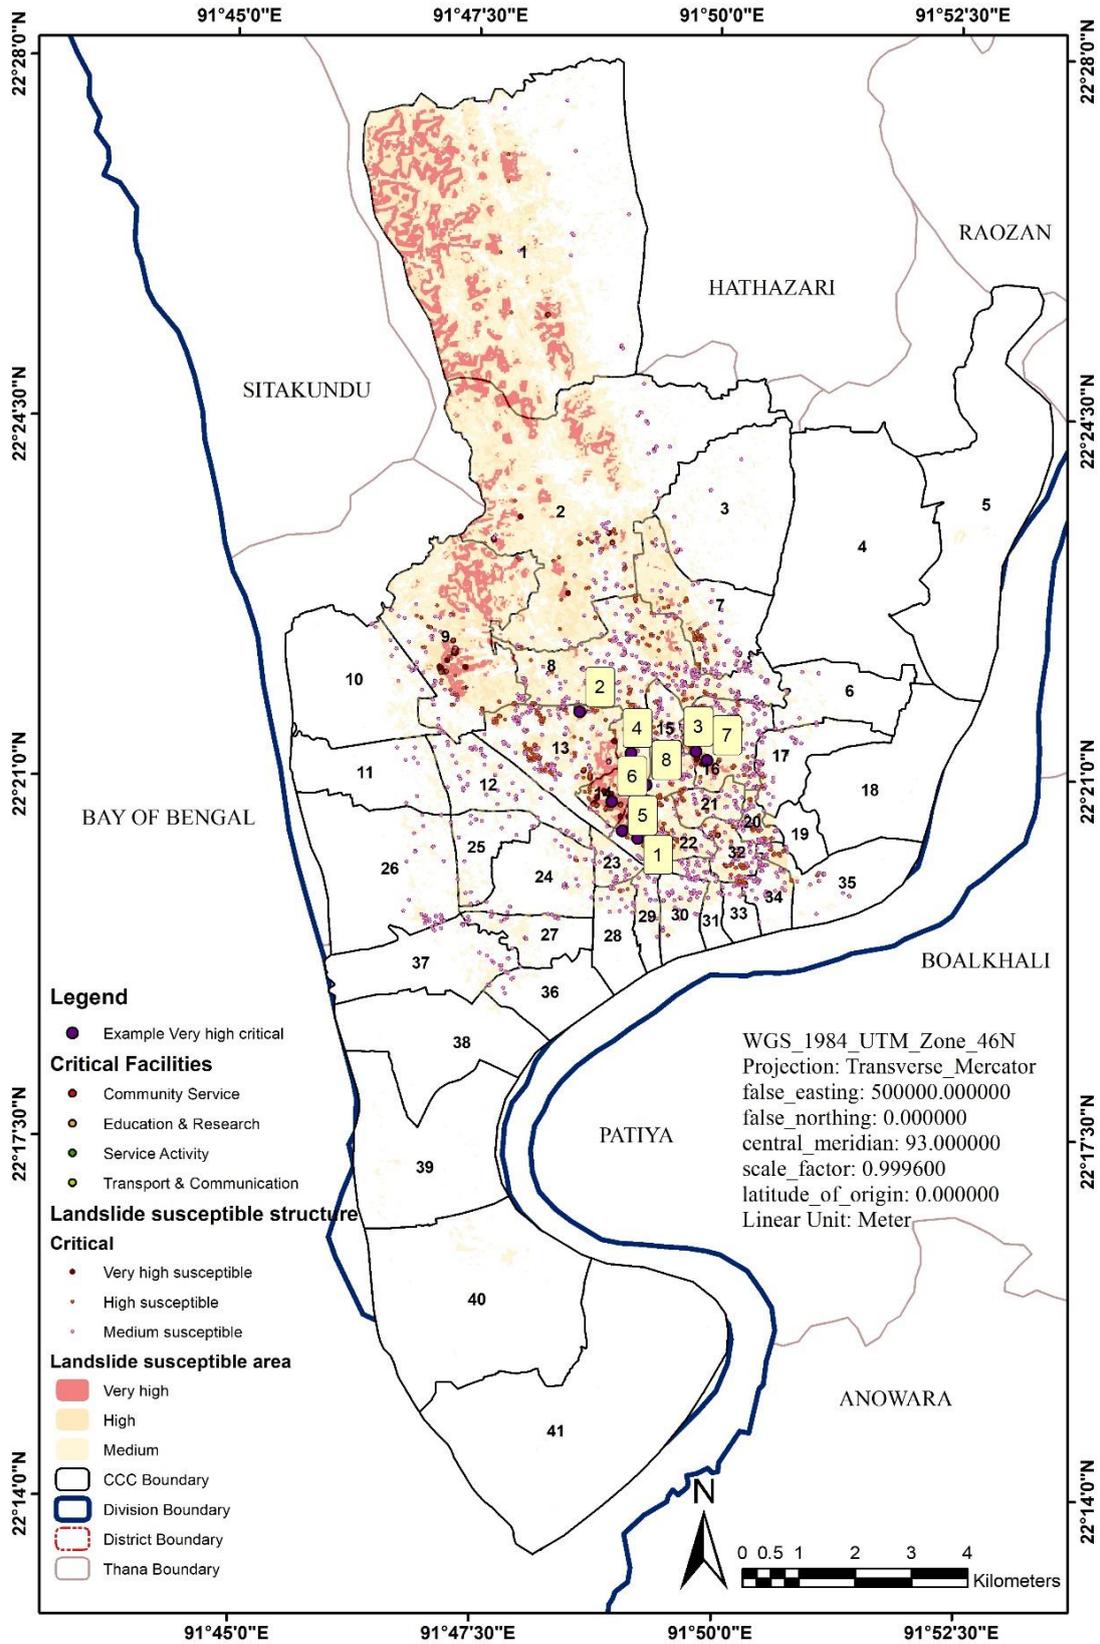


Figure 11. Critical facilities susceptibility map of CCC area.

### 5.3 Social susceptibility analysis

Social susceptibility is analyzed through the identification of Population distribution, Gender, age group of people and literacy rate of the study area. The population density is not included because of not having density data of individual wards of CCC area. The susceptible population such as affected population, affected female population, affected population below 10 years and affected population above 60 years can be calculated in respect of total population residing in the landslide susceptible area.

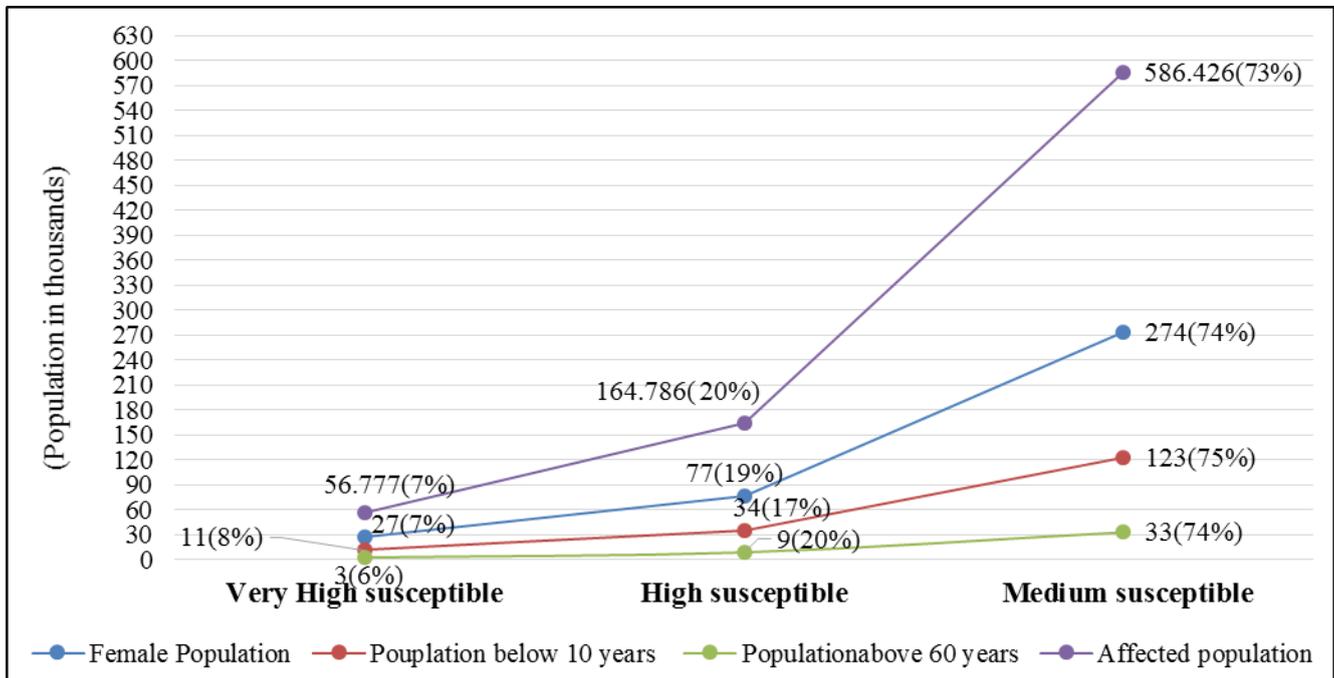


**Figure 12.** Social susceptibility according to population criteria and susceptible area in CCC.

The susceptible areas in CCC are divided into three phases such as very high susceptible, high susceptible and medium susceptible area. The very high susceptible population is identified as 56777 which is 7 % of total susceptible population in CCC area. The high susceptible and medium susceptible population comprises 20 % and 73 % of total susceptible population shown in Figure 12. Women are also more vulnerable to disasters because of their roles as mothers and caregivers: when disaster is about to strike, their ability to seek safety is restricted by their responsibilities to the very young and the very old, both of whom require help and supervision [40]. The percentage of female population susceptible to landslide hazard can be described as very high susceptible 7 % (26668), high susceptible 20 % (76713) and medium susceptible 73 % (273511) of total affected female population. The selected age groups for this analysis are taken as “**below 10 years**” and “**above 60 years**”. Then the population within the susceptible age groups is distributed among the affected community. The population below 10 years susceptible to landslide in CCC area are found to be 11312 (very high susceptible), 34214 (high susceptible) and 123123 (medium susceptible). The total population above 60 years in CCC area are 44016, among them 6 % (2618) are found in very high susceptible, 20 % (8625) high susceptible and 74 % (32772) medium susceptible to several landslide occurrences also shown in Figure 12.

Literacy increases disaster awareness among people and has an influential effect on successful disaster management process. Literacy rate of almost all the wards of the study area is around 70% [36]. Literacy rate has not been considered because it will not impose much difference in the susceptibility assessment process.

#### 5.4 Economic susceptibility analysis

Economic susceptibility depends on how many important economic activities are located in close proximity to susceptible areas which comprises of commercial and manufacturing industries. Among all the economic activities, 19 of manufacturing and processing industries and 299 commercial activities are threatened very highly to landslide hazard. There are also 1242 commercial centers and 208 manufacturing and processing industries that are highly susceptible to landslide hazard. The scarcity of land requirement forces to establish new commercial or manufacturing industries in the landslide prone hills and become highly susceptible to landslide hazard.

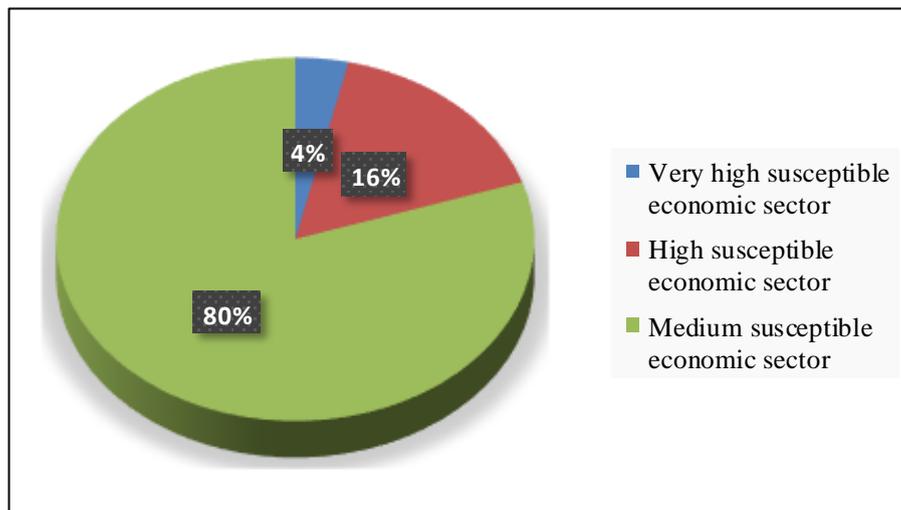

**Figure 13.** Economic facilities susceptibility to landslide hazard.

It is found from Figure 13 that, 4% structures are very highly and 16% of total susceptible structures are highly susceptible, since most of the economic activities are located in the plain land, the economic activities susceptibility is lower in the hilly regions. Very important economic activities located in very high susceptible zone are shown in Figure 14. The economic facilities that are found very highly susceptible to landslide hazard are given in Table 10.

**Table 10:** Economic facilities very highly susceptible to landslide in CCC area.

ID	Location	ID	Location
1	Bangladesh Agricultural Research Institute	4	Mallick Re-rolling Mills LTD
2	Fashions Metal Industries Ltd.	5	Berger Paints BD Ltd.
3	Rotun Pur Steel Mills LTD	6	Bismillah Super Market


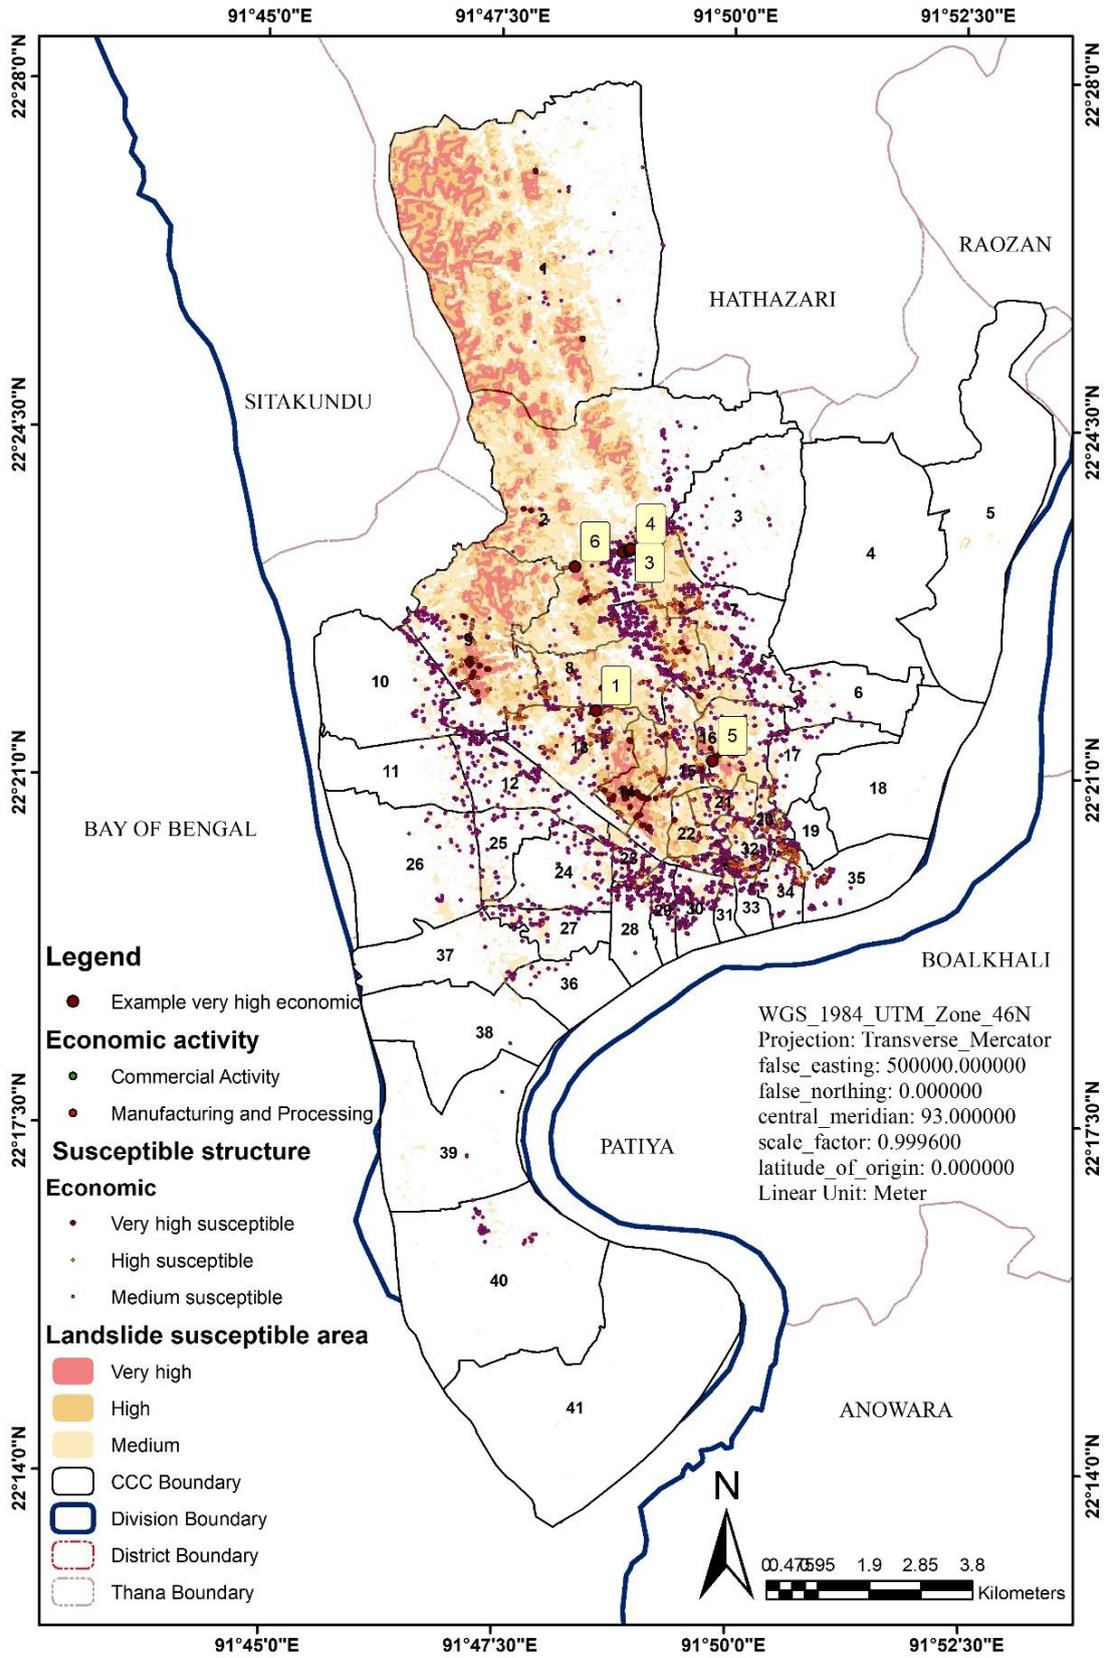


Figure 14. Economic facilities susceptibility map of CCC area.


### 5.5 Environmental susceptibility analysis

A landslide phenomenon in CCC area poses a serious effect on environment. Since most of the landslide occurrences are recorded on hilly areas composed with dense forest, there lies severe risk to landslide hazard. Among all the forest areas in CCC area, 24 % (4.99 km<sup>2</sup>) lies in very low, 16 % (3.34 km<sup>2</sup>) in low, 34 % (7.29 km<sup>2</sup>) in medium, 21 % (4.47 km<sup>2</sup>) in high and 5 % (1.14 km<sup>2</sup>) in very high susceptible areas, as shown in Figure 15. Though the dense forest in very high susceptible areas are lower but the overall susceptibility of forest areas are significantly higher because of having higher percentage of forest areas in very high susceptibility class. The medium susceptibility class (Figure 16c) has covered highest percentage of forest areas but the overall susceptibility to landslide occurrences are lower in this class (Figure 16). The very high susceptible areas in Figure 15, occupies 63 % (1.14 km<sup>2</sup>) forest land, 27 % (.49 km<sup>2</sup>) shrubs or agriculture land, 8% (.14 km<sup>2</sup>) barren land, 2 % (.04 km<sup>2</sup>) urban area and 0 % (0 km<sup>2</sup>) water which also shows forest areas in this class are very highly susceptible to landslide hazard.

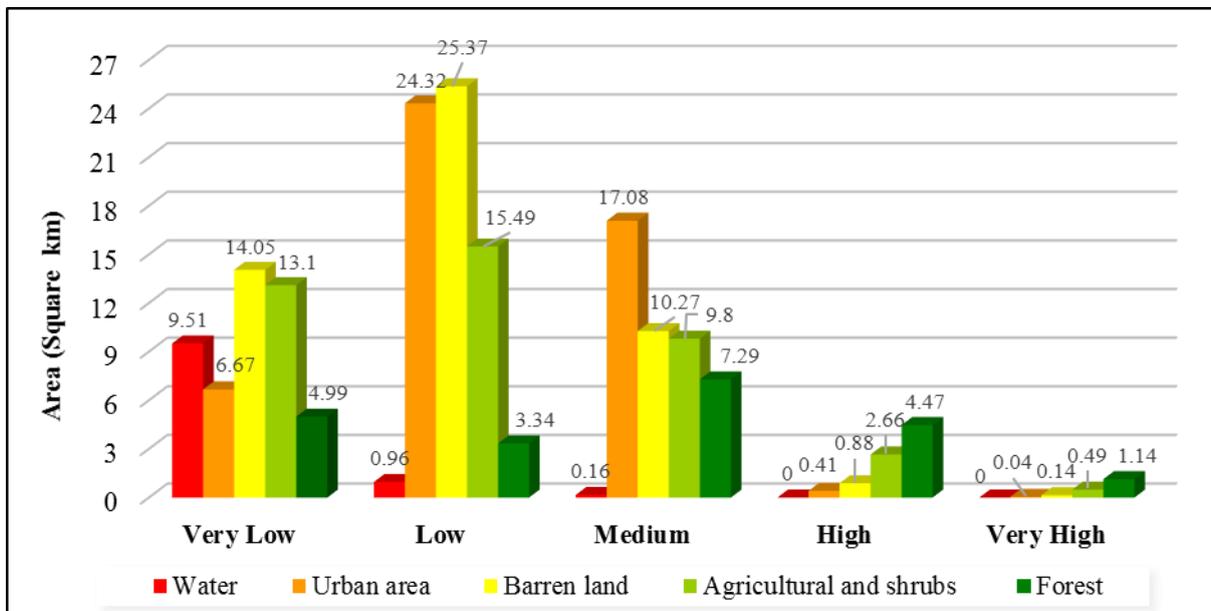

**Figure 15.** Environmental susceptibility to landslide hazard

The forest areas are higher in very high and high susceptible classes but in low susceptibility class, the amount of forest areas are lower. The highest numbers of urban areas are found in low and medium susceptible areas which have less possibility of landslide occurrences. The numbers of urban areas in high and very high susceptibility classes are lower which also shows less urban areas are susceptible in those two classes. The shrubs and agriculture land are also higher in very low and low susceptible classes which can also be recognized as flat land, as shown in Figure 15.

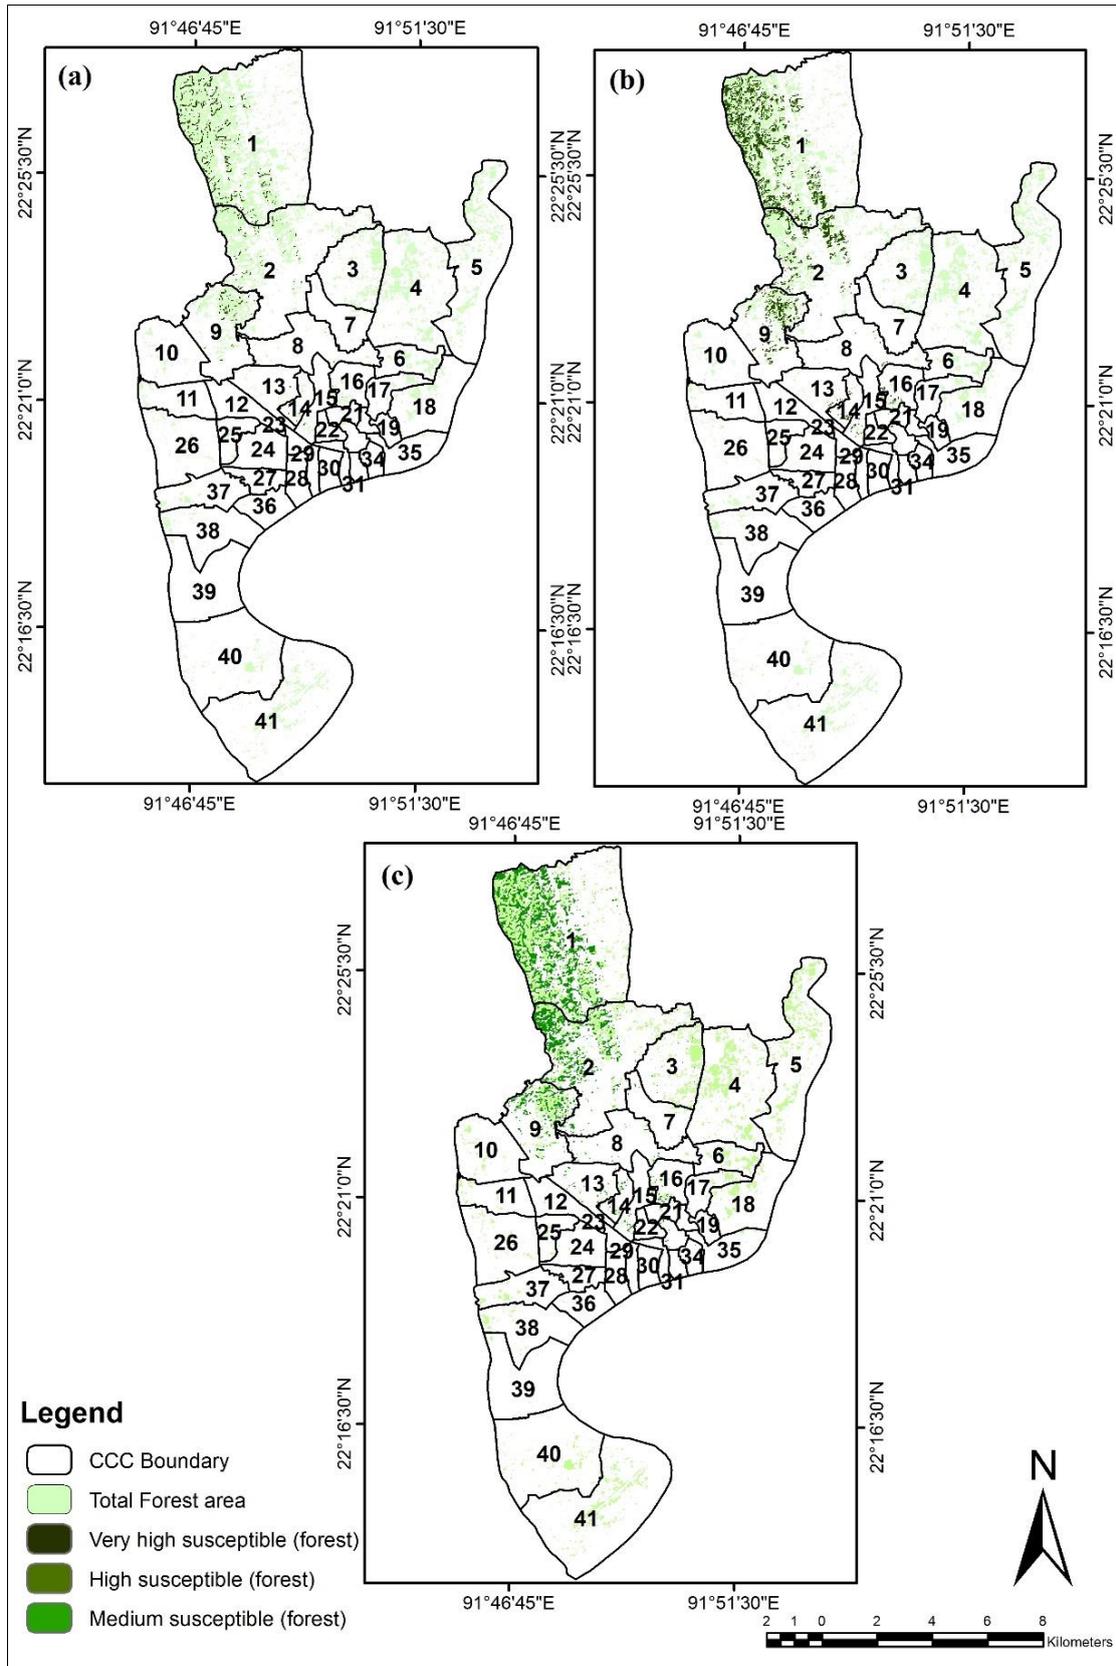

**Figure 16.** Environmental susceptibility (dense forest) map of CCC area; (a) very high susceptible; (b) high susceptible; (c) medium susceptible.

## 6. Major findings

In CCC, very high susceptible areas for landslide are found to be 6.5 sq. km and high susceptible areas are 11.45 sq. km which represents 4 % and 7 % of total areas respectively. But they have accommodated 80 % of the landslide reference points. The very high susceptible locations are identified as *Motijorna Tankirpar, Batali hill, Lebubagan, Foy's lake, Kusumbag residential area, Khulsi, Akbar shah mazar hill and Nasirabad residential area.*

Since most of these locations are used as residential purposes, the infrastructural and social susceptibility to landslide are higher in these locations. Among all the susceptible residential structures in CCC, the very high susceptible, high susceptible and medium susceptible locations are found to be 7 %, 21 % and 72 %. In case of road susceptibility, 5% (43.36 km) roads are very highly and more than 95 % (800 km) of roads are highly to medium susceptible. The medium susceptible road occupies the larger portion of the road network.

The very high susceptible critical facilities are identified as 144 (4 %), high susceptible 636 (19 %) and medium susceptible 2648 (77 %) of total critical facilities in CCC area. The education and research and service activity facility possesses higher susceptibility to landslide occurrences. Among those critical facilities, 51 educational institutions are very highly and 737 are highly affected and 30 service oriented structures are very highly susceptible to landslide.

The very high susceptible population is 56777, 7 % of total susceptible population in CCC area. The high susceptible and medium susceptible population comprises 20 % and 73 % of total susceptible population. The percentage of female population susceptible to landslide hazard can be described as very high susceptible 7 % (26668), high susceptible 20 % (76713) and medium susceptible 73 % (273511) of total affected female population. The population below 10 years susceptible to landslide in CCC area are found to be 11312 (very high susceptible), 34214 (high susceptible) and 123123 (medium susceptible). The total population above 60 years in CCC area are 44016, among them 6% (2618) are found in very high susceptible, 20 % (8625) high susceptible and 74 % (32772) medium susceptible to several landslide occurrences.

Among all the economic activities, 19 of manufacturing and processing industries and 299 commercial activities are threatened very highly to landslide hazard. Among all the forest areas in CCC area, 24 % (4.99 km<sup>2</sup>) lies in very low, 16 % (3.34 km<sup>2</sup>) in low, 34 % (7.29 km<sup>2</sup>) in medium, 21 % (4.47 km<sup>2</sup>) in high and 5% (1.14 km<sup>2</sup>) in very high susceptible areas. The forest areas are higher in very high and high susceptible classes but in low susceptibility classes the amount of forest areas are lower. On the basis of the major findings, the overall landslide susceptibility of CCC is summarized (Table 11) and it can be concluded that the overall community susceptibility is high for landslide hazard.

**Table 11.** Summarized result of the study

Hazard	Parameter	Status
Landslide	Physical susceptibility	High
	Critical facilities susceptibility	Medium
	Social susceptibility	High
	Economic susceptibility	Low
	Environmental susceptibility	Low

## 7. Conclusions

Hill cutting and heavy rainfall are prime factors for landslides in Chittagong that causes death to hundreds people with a great property loss. The study is an attempt to see the efficacy of AHP and CVAT tools for analyzing landslide susceptibility of the CCC area. As susceptible areas of the landslide are found in the study, it would be rational to provide supportive actions for preparing disaster management plan for these susceptible areas. Besides, several steps can be taken to reduce the effect of landslide such as to understand the processes and mechanisms of landslide, Sensitive hill areas needs special environmental impact assessment (EIA) before undertaking any development activity, density restriction should be established, Relocation of the foothill slums, comprehensive awareness is to be administered to enhance public awareness, harmonization of institutional mandates should be developed through an inter-organizational coordination mechanism etc. Finally on the basis of the study it can be concluded that if the government and other concerned authorities take necessary steps, susceptibility of landslide hazards can be reduced to an extent tolerable to the city people.

## Acknowledgments

Sourav Das is a Graduate student from Chittagong University of Engineering and Technology (CUET). This article is extracted from the undergraduate thesis, which was conducted by Sourav Das in the Department of Urban and Regional Planning, Chittagong University of Engineering and Technology (CUET), Chittagong, Bangladesh. Debasish Roy Raja was the primary supervisor of the thesis. The authors are grateful to Chittagong Development Authority (CDA), Chittagong City Corporation (CCC), Md. Rezuhanul Islam, the expertise person and the people of the landslide susceptible areas who help to complete this research.

## Author Contributions

Sourav Das performed all the relevant GIS analyses and produced the graphs related to the implementation of the susceptibility analysis of landslide in Chittagong city corporation area. He wrote the data collection, analysis, findings, discussions, and conclusions sections. He also prepared and edited this manuscript.

Debasish Roy Raja developed the research proposal, supervised the whole work, and edited this article.

## Conflicts of Interest

The authors declare no conflict of interest.

## References

1. Mahmood, A. B.; Khan, M. H. Landslide vulnerability of Bangladesh hills and sustainable management options: a case study of 2007 landslide in Chittagong city. In Proceedings of the 2008 International Seminar on Disaster Management and Mitigation of Water Induced Disaster, Kathmandu, Nepal, 21-22 April 2008.

2. Chittagong Development Authority. Available online: <http://portal.cda.gov.bd/> (accessed on 8 September 2014).
3. Khan, Y.A.; Habibah, M. L.; Baten, M. A.; Kamil, A. A. Critical antecedent rainfall conditions for shallow landslides in Chittagong City of Bangladesh. *Environmental Earth Sciences*. **2012**, 67(1), 97-106.
4. Sarwar, G. M. Landslide Tragedy of Bangladesh. In Proceedings of the 2008 the First World Landslide Forum. Tokyo, Japan, 18-21 November 2008; United Nations University (UNU), Tokyo, Japan, 2008.
5. Lee, S.; Sambath, T. Landslide susceptibility mapping in the Damei Romelarea, Cambodia using frequency ratio and logistic regression models. *Environ Geol*. **2006**, 50, 847-855.
6. Soeters, R.; Van Westen, C. J. Slope stability: recognition, analysis and zonation. In *Landslides: Investigation and Mitigation*, ed.; Turner, A.K., Shuster, R.L. Eds.; Transportation research Board–National Research Council, 1996.
7. Guzzetti, F.; Carrarra, A.; Cardinali, M.; Reichenbach, P. Landslide hazard evaluation: A review of current techniques and their application in a multi-scale study, Central Italy. *Geomorphology*. **1999**, 31, 181–216.
8. Gassner, C.; Promper, C.; Petschko, H.; Glade, T. Scenarios of future landslide susceptibility–incorporating changes in land cover and climate. *Geophysical Research abstracts*. **2013**, 15, 6786.
9. Chàcon, J.; Irigaray, C.; Fernández, T.; El Hamdouni, R. Engineering geology maps: Landslides and geographical information systems. *Geology and the Environment*. **2006**, 65, 341–411.
10. Lee, S.; Pradhan, B. Landslide hazard assessment at Cameron Highland Malaysia using frequency ratio and logistic regression models. *Geophy Res Abstracts*. **2006**, 8, SRef-ID: 1607–7962/gra/ EGU06-A-03241.
11. Akgun, A.; Dag, S.; Bulut, F. Landslide susceptibility mapping for a landslide-prone area (Findikli, NE of Turkey) by likelihood-frequency ratio and weighted linear combination models. *Environ Geol*. **2008**, 54, 1127-1143.
12. Saaty, T. L. *The Analytical Hierarchy Process*, McGraw Hill, NY, 1980.
13. Ayalew, L.; Yamagishi, H.; Ugawa, N. Landslide susceptibility mapping using GIS-based weighted linear combination, The case in Tsugawa area of Agano River, Niigata Prefecture, Japan. *Landslides*. **2004**, 1, 73–81.
14. Aleotti, P.; Chowdhury, R. Landslide hazard assessment: summary review and new perspective. *Bulletin of Engineering Geology and the Environment*. **1999**, 21–44.
15. Yilmaz, I. Landslide susceptibility mapping using frequency ratio, logistic regression, artificial neural networks and their comparisons: A case study from landslides (Tokat-Turkey). *Computer & Geo-science*. **2009**, 35, 1125-1138.
16. Clerici, A.; Perego, S.; Tellini, C.; Vescovi, P. A GIS-based automated procedure for landslide susceptibility mapping by the conditional analysis method: The Baganza valley case study (Italian Northern Apennines). *Environmental Geology*. **2006**, 50, 941–961.
17. Saaty, T. *A scaling method for priorities in hierarchical structures*. Math Psychol, NY, 1977.

18. Goodwin, L. *NOAA Coastal Service center*, ed., T. B. Group, USA, 2014. Available online: <http://www.css.noaa.gov/rvat/> (accessed on 9 September 2014).
19. Leone Pippard and commission. *Assessment and Test Application of the Community Vulnerability Assessment Tool (CVAT) in Grand Bay-Westfield*, Nova Scotia; Leone Pippard Principal and Associates / LPA, Nova Scotia, 2012. Available online: <http://www.atlanticadaptation.ca> (accessed on 10 September 2014).
20. UNC Institute for the Environment. *Community Based Vulnerability Assessment: A Guide to Engaging Communities in Understanding Social and Physical Vulnerability to Disasters*. North Carolina; UNC Institute for the Environment, North Carolina, USA, 2009. Available online: <http://www.ie.unc.edu> (accessed on 14 September 2014).
21. Acharya, G.; De Smedt, F.; Long, N. T. Assessing Landslide Hazard in GIS: A Case Study from Rasuwa Nepal. *Bulletin of Engineering Geology and the Environment*. **2006**, 65(1), 99-107.
22. Intarawichian, N.; Dasananda, S. Analytical Hierarchy Process for landslide susceptibility mapping in lower Mae Chaem watershed, Northern Thailand. *Suranaree J. Sci. Technol.* **2010**, 17(3), 277-292.
23. Fell, C.; Bonnard, C. H.; Cassini, C. Guidelines for landslide susceptibility, hazard and risk zoning for land use planning. *Engineering Geology*. **2008**, 102, 85–98.
24. Berberoglu, S.; Evrendilek, F. *Modeling Forest Productivity Using Envisat MERIS Data Sensors, 2007*, 7; pp. 2115-2127.
25. Xiaoling, C.; Xiaobin, C. Expert classification method based on patch-based neighborhood searching algorithm. *Geo-Spatial Information Science*. **2006**, 10(1), 37-43.
26. Wen, Y.; Khosrowpanah, S.; Heitz, L. L. *Land Cover Accuracy Assessment for Southern Guam, ed.*; Water and Environmental Research Institute of the Western Pacific University of Guam, UOG Station, Mangilao, 2009.
27. ArcGIS 10@ Help. Environmental systems Research Institute (ESRI), Redlands, CA USA, 2014. Available online: <http://help.arcgis.com/en/arcdesktop/10.0/help/> (accessed on 10 march 2014).
28. Lillesand, T. M.; Kiefer, R. W. *Remote Sensing and Image Interpretation, ed.*, John Wiley & Sons Inc, New York, USA, 2004.
29. Khan, Y. A.; Chang, C. Landslide hazard mapping of Chittagong city area, Bangladesh. *Engineering Geology*. **2007**, Vol.XXXV, 1-4.
30. Yalcin, A. GIS-based landslide susceptibility mapping using analytical hierarchy process and bivariate statistics in Ardesen (Turkey): Comparisons of results and confirmations. *CATENA*. **2008**, 72(1), 1–12.
31. Bhatt, B. P.; Awasthi, K. D.; Heyojoo, B. P.; Silwal, T.; Kafle, G. Using Geographic Information System and Analytical Hierarchy Process in Landslide Hazard Zonation. *Applied Ecology and Environmental sciences*. **2013**, 1.2, 14-22.
32. Bagherzadeh, A.; Mansouri, D. M. Mapping of landslide hazard zonation using GIS at Golestan watershed, northeast of Iran. *Arabian Journal of Geosciences*. **2012**, 5, 20-28.

33. Gokceoglu, C.; Aksoy, H. Landslide susceptibility mapping of the slopes in the residual soils of the Mengen region (Turkey) by deterministic stability analyses and image processing techniques. *Eng Geology*. **1996**, *44*, 147–161.
34. United Nation. *Cities and climate change: global report on human settlements*, Ed.; United Nations Human Settlements Programme, 2011.
35. Bangladesh Meteorological department. Available online: <http://www.bmd.gov.bd/> (accessed on 2 August 2014).
36. BBS. Community Report: Chittagong Zila. In *Population and Housing Census 2011*; Ministry of Planning, Ed.; Bangladesh Bureau of Statistics: Dhaka, Bangladesh, 2012; Vol 3.
37. Malczewski, J. *GIS and Multi-Criteria Decision Analysis*, 1st ed. ed.; John Wiley and Sons, NY, 1999.
38. Satty, T. L.; Vargas, L. *Models, Methods, Concepts, and Applications of the Analytic Hierarchy Process*, 1st ed.; Kluwer Academic, Boston, USA, 2001.
39. Ahmad, Q. K.; Ahmed, A. U. Regional cooperation in flood management in the Ganges-Brahmaputra- Meghna region: Bangladesh perspective. *Natural Hazards*. **2003**, *28*, 181-198.
40. Lisa, K. F.; Russell, W. J.; David, N. S. Community Vulnerability Assessment Tool Methodology. *Natural Hazards Review*. **2002**, *3*, 162-176.