

# Geothermal Repurposing of Depleted Oil & Gas Wells in Italy<sup>†</sup>

Elena Soldo <sup>1,\*</sup>, Claudio Alimonti <sup>1</sup> and Davide Scrocca <sup>2</sup>

<sup>1</sup> Università degli Studi di Roma La Sapienza - DICMA, 00185 Roma, Italy; claudio.alimonti@uniroma1.it

<sup>2</sup> CNR – IGAG, 00185 Roma, Italy; d.scrocca@igag.cnr.it

\* Correspondence: [elena.soldo@unroma1.it](mailto:elena.soldo@unroma1.it)

† Presented at the First World Energies Forum, 14 September–5 October 2020; Available online: <https://wef.sciforum.net/.for> every paper.

Published: 11 September 2020

**Abstract:** The decarbonisation of the energy sector is probably one of the main worldwide challenges of the future. Global changes urge a radical transformation and improvement of the energy-producing systems to meet the decarbonisation targets and a reduction of greenhouse gas emissions. The hydrocarbon industry also contributes to this transition path. In a mature stage of oil and gas fields, the production of hydrocarbons is associated with formation waters. The volume of produced water increases with the maturity of the assets and the conversion into geothermal wells could be an alternative to the mining closure. In the described transition scenario, the geothermal energy seems very promising because of its wide range of applications depending on the temperature of extracted fluids. This flexibility enables to propose projects inspired to a circular economy vision with the integration in the territory and social acceptance. In Italy, since 1985, 7246 well has been drilled for hydrocarbon of which 898 are located on-shore with a productive or potentially productive operational status. The paper presents a preliminary investigation on oil and gas fields located onshore in Italian territory based on the available information on temperature distribution at different depth. Then, taking into account the local energy demand, existing infrastructure, and land use of the territory, a conversion strategy for the producing wells has been proposed for three case studies.

**Keywords:** geothermal energy; hydrocarbons; decarbonisation; oil & gas

---

## 1. Introduction

One of the main challenges of the future is the decarbonisation of the energy sector. Global changes urge a radical transformation and improvement of the energy-producing systems to meet the decarbonisation targets of the European economy reducing greenhouse gas emissions. The main targets for 2030 is a reduction of 40% of greenhouse gases, an increase in renewable energy of 27% and the energy efficiency of 27%. For 2050, the targets are higher with a perspective in Europe of reduction in emissions of around 90% and an increase in energy from renewables to 75% and energy efficiency up to 41%.

Current heating and cooling plants are a major contributor to the EU's greenhouse gas emissions. 47% of the final energy consumption in the EU is due to heating and cooling (domestic & industrial) and 81% of heating is produced through the combustion of fossil fuels while cooling predominantly is produced from electricity-driven processes (today largely generated by burning coal and gas). Geothermal energy can contribute to the diffusion of low carbon technologies for the generation of electricity, heating and cooling.

Finding alternative energy sources to hydrocarbons, optimizing the energy production, integrating different energy sources, reducing waste heat and the environmental impacts are some of the current objectives for a successful energy transition in modern industrial societies. For these purposes, it should be considered that the oil and gas production in its mature stage is often associated with a large volume of formation waters, which must be treated continuously and could not be released to the environment. Increasing the maturity of hydrocarbon fields, the water production increases as well. So, when the hydrocarbons wells are going to be depleted, they can be converted into geothermal wells. Some studies evaluated the potential heat recovery from oil and gas fields worldwide. Ref. [1] estimated that the use of co-produced fluids in oilfields along the Gulf Coast could produce over 1 GW of electric power. Ref. [2] state the use of oilfields of Los Angeles may generate 7.43 MW of net power and [3] reported that 4,241,018 J of recoverable geothermal energy is stored in the Chinese oilfields. Moreover, ref. [4] reported a summary of the worldwide oilfield geothermal direct use projects: Austria uses the water of abandoned wells since '70 to feed spa resorts; in Albania, the water is used in greenhouse heating; heat trace oil gathering is carried out in China and Hungary; in China, the space heating projects are numerous. The selection of the final use (production of thermal power or electricity) and the potential of geothermal production depend on the temperature, pressure and flow rate of water, which are a function of a local geothermal gradient, well-depth, and poro-perm properties of the reservoir rocks.

The first example of co-production or geothermal application of gas wells is the pilot plant in Pleasant Bayou field where, in 1980, a 1 MW hybrid cycle power plant was built to demonstrate the possibility of using existing wells to extract both gas and hot water and to produce electricity [5]. Since then, several studies on geothermal energy production from abandoned oil and gas fields have been conducted [6–25].

In this context, a key point for the geothermal sector is the need to reduce uncertainties on profitability and to design sustainable solution for large-scale development out of the conventional assets as well as to be deployed more rapidly. The possibility of a crossover from oil & gas to geothermal energy production represents a chance for Italy to increase the share of renewable energy production and to reduce the waste heat. The target of this work is to produce a vision of the potential benefits resulting from the reuse of depleted oil & gas wells in Italy. Starting from the available information on fields and wells provided by the Ministry of Economic Development and fields temperature from the Italian National Geothermal Database [26], a selection of the most promising areas has been conducted. Among these fields, three case studies representative of different petroleum systems and geological setting, have been selected for a preliminary survey of the possible geothermal reuse. Taking into account the local energy demand, existing infrastructure, and land use of the territory, a conversion strategy for the active wells has been evaluated.


## 2. Italian Petroleum Systems

An overview of the geological settings of the main petroleum systems in Italy, and of the associated active hydrocarbons fields, has been carried out to properly frame the detailed analysis of our case studies.

Hydrocarbon occurrences in Italy (fields, discoveries, and shows) are associated to both carbonate and siliciclastic reservoir rocks ranging in age from Triassic to Paleogene and from Oligocene to Pleistocene, respectively, distributed in thrust belt, foredeep basin, and foreland geological settings (Figure 1) [27–35].

Based on the main source rocks ([34,36–38]; and references therein), at least 5 major petroleum systems [39] can be recognised in Italy. The approximate geographic extent of these petroleum systems and the stratigraphic distribution of the known source rocks and hydrocarbon occurrences is shown in Figure 1 (after [34]). Three of these petroleum systems, mainly oil-prone, are associated to Meso-Cenozoic passive margin sedimentary covers that are made up by shallow water and pelagic carbonates, evaporites, and clastics sedimented following Mesozoic extensional tectonics stages. The last two petroleum system, essentially gas-prone, are instead related to terrigenous Oligo-Miocene and Plio-Pleistocene foredeep units deposited during the development of the Alpine and Apennines

orogens. The main characteristics of these five petroleum systems [27–35] are briefly summarized in Table 1.

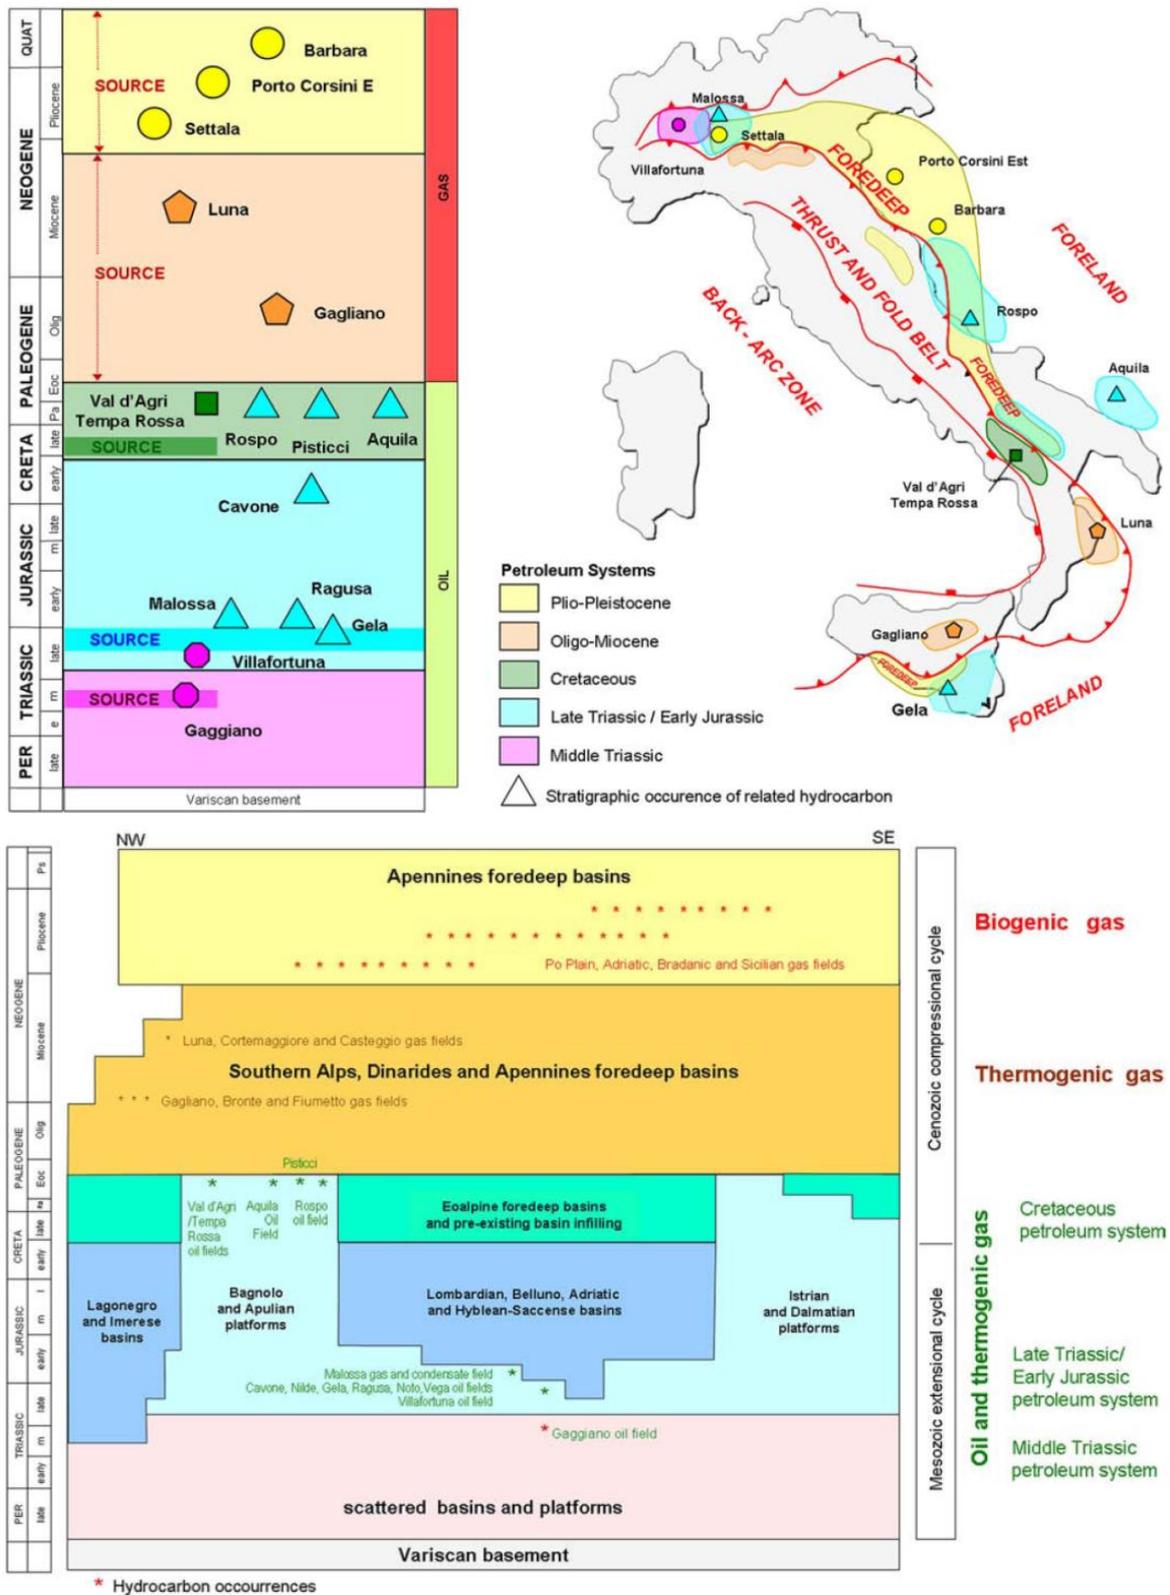

**Figure 1.** Geographic location of the five petroleum systems recognised in Italy (above, right), stratigraphic distribution of the related source rocks and hydrocarbon occurrences (above, left), and

relationships between hydrocarbon occurrences and the tectono-stratigraphic setting (below; after 34).


**Table 1.** Italian Petroleum system and typically associated fields.

<b>Petroleum System</b>	<b>Reservoir Source Rock</b>	<b>Representative Fields</b>
Middle Triassic	Fractured and dolomitized shelf carbonates, hosted in trust-related folds and sealed by marly and volcanoclastic units, are charged by the Besano Shales (Anisian/Ladinian) and Meride Limestone (Ladinian) source rocks.	<b>Villafortuna–Trecate</b> oil field, discovered in 1984 with a cumulative production at the end of 2000 of 188 Mbo of 43° API oil and more than 2000 MSTm3 of gas,
Late Triassic–Early Jurassic	Oil accumulations in a variety of stratigraphic intervals of the Mesozoic–Early Cenozoic sedimentary cover overlying Late Triassic–Early Jurassic source rocks in traps generally represented by reactivated structures occurring along the foreland margin.	<b>Gela</b> oil field in Sicily discovered in 1956 with reserves of 130–150 Mbo
Cretaceous	The reservoir is made up by Cretaceous–Middle Miocene fractured shallow-water limestone and dolostones sealed by shaly units in traps represented by thrust-related folds. It is charged by an Albian–Cenomanian organic-rich carbonate source rock deposited in isolated basins developed during the Cretaceous anoxic events within the long-lasting Apulian carbonate platform.	<b>Val d’Agri</b> oil field, discovered in 1988 with estimated reserves of about 480 Mbo of 26°–42° API oil.
Thermogenic gas in Oligo-Miocene foredeep	This system is associated with an early thermogenic generation from the gas-prone organic matter contained in the shaly levels that charged the turbidite reservoirs. Hydrocarbon accumulations hosted in structural traps with some light oil and condensate.	Typical examples are the <b>Gagliano</b> and <b>Luna</b> gas fields.
Biogenic gas in Plio-Pleistocene foredeep	The sand-rich turbidite reservoir is charged with biogenic gas by the interbedded clay levels, characterised by an organic matter of terrestrial origin, which also provide the seal. Traps are usually structural although several stratigraphic traps have been also recognised.	<b>Porto Corsini East</b> and <b>Barbara</b> gas fields.

### 3. Materials and Methods

The National Mining Office of the Italian Ministry for Economic Development (MISE) provides information and data regarding productive wells, oil and gas and gas storage licences in Italy for Hydrocarbon and Georesources [40]. Data are also provided by the website of the project “Visibility of petroleum exploration data in Italy” [41] promoted by the MISE-DGRME, the Italian Geological Society and the Assomineraria association. Additional information on the location and characteristics of the Italian hydrocarbon fields have been retrieved from literature (e.g., [27,28,30,32–34,42–44]).


The MISE reports, at the end of June November 2019, 93 research permits and 193 production concessions while the active hydrocarbons wells (as of February 2019) are 2166 in total, of which 898 are located on-shore with a productive or potentially productive operational status (Figure 2).

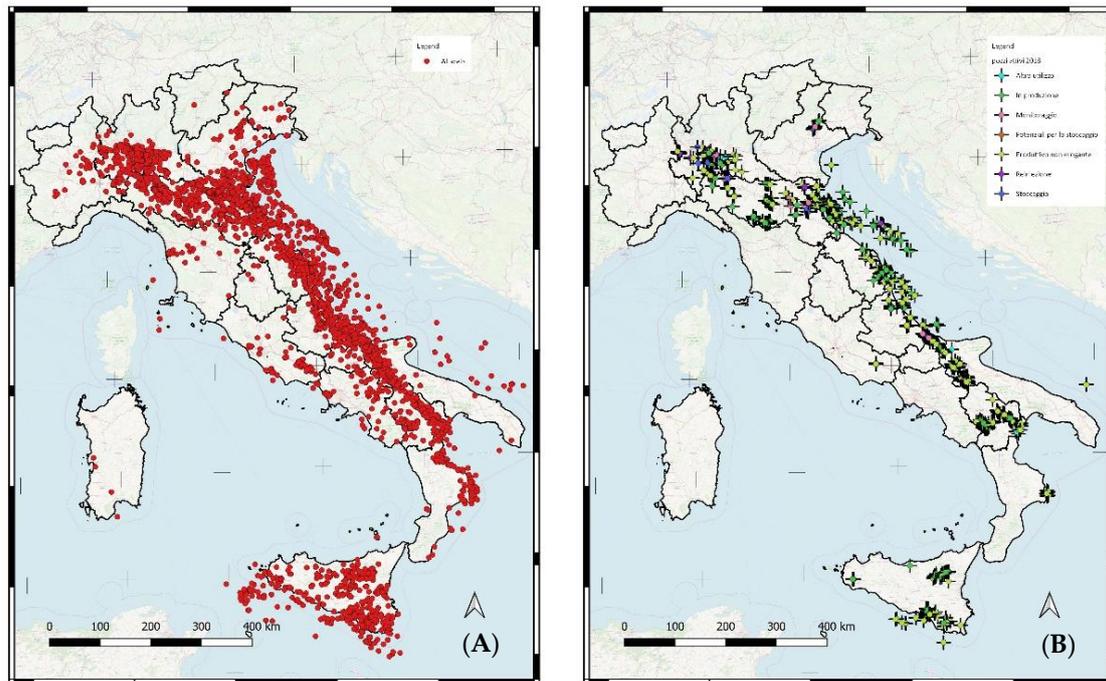

**Figure 2.** Oil and gas wells in Italy. (A) Complete collection, (B) active wells in 2019.

For the purposes of this contribution, we have selected only the onshore fields that have productive (or potentially productive) wells. We have then cross-checked the position of these fields with the available information on temperature at depth. To get this results, and taking into consideration that this a first pass national screening, we have adopted a simple approach using the temperature maps at depth  $-1000$ ,  $-2000$  and  $-3000$  m below ground level published by [45], also available in the Italian National Geothermal Database [26].

The selection criterion to identify the promising fields is based on the lower temperature for possible applications. The chosen temperature is  $70\text{ }^{\circ}\text{C}$ , interesting for direct uses, and the temperature maps used in selection were limited to  $-2000$  and  $-3000$  m. The selected fields are located in areas where the temperature estimated at  $-3000$  m and  $-2000$  m are higher than  $70\text{ }^{\circ}\text{C}$  according to the total depth of the existing wells. Moreover, in the Bradano foredeep, the selection includes also fields that overlap areas with a temperature higher than  $60\text{ }^{\circ}\text{C}$  at  $-2000$  m. With the described above approach, 42 fields have been identified. Among those fields, 23 fields are deeper than  $3000$  m with a temperature higher than  $70\text{ }^{\circ}\text{C}$  while, at depth between  $2000$  and  $3000$  m, 9 fields have a temperature higher than  $70\text{ }^{\circ}\text{C}$  and 10 fields a temperature higher than  $60\text{ }^{\circ}\text{C}$  (Figure 3).

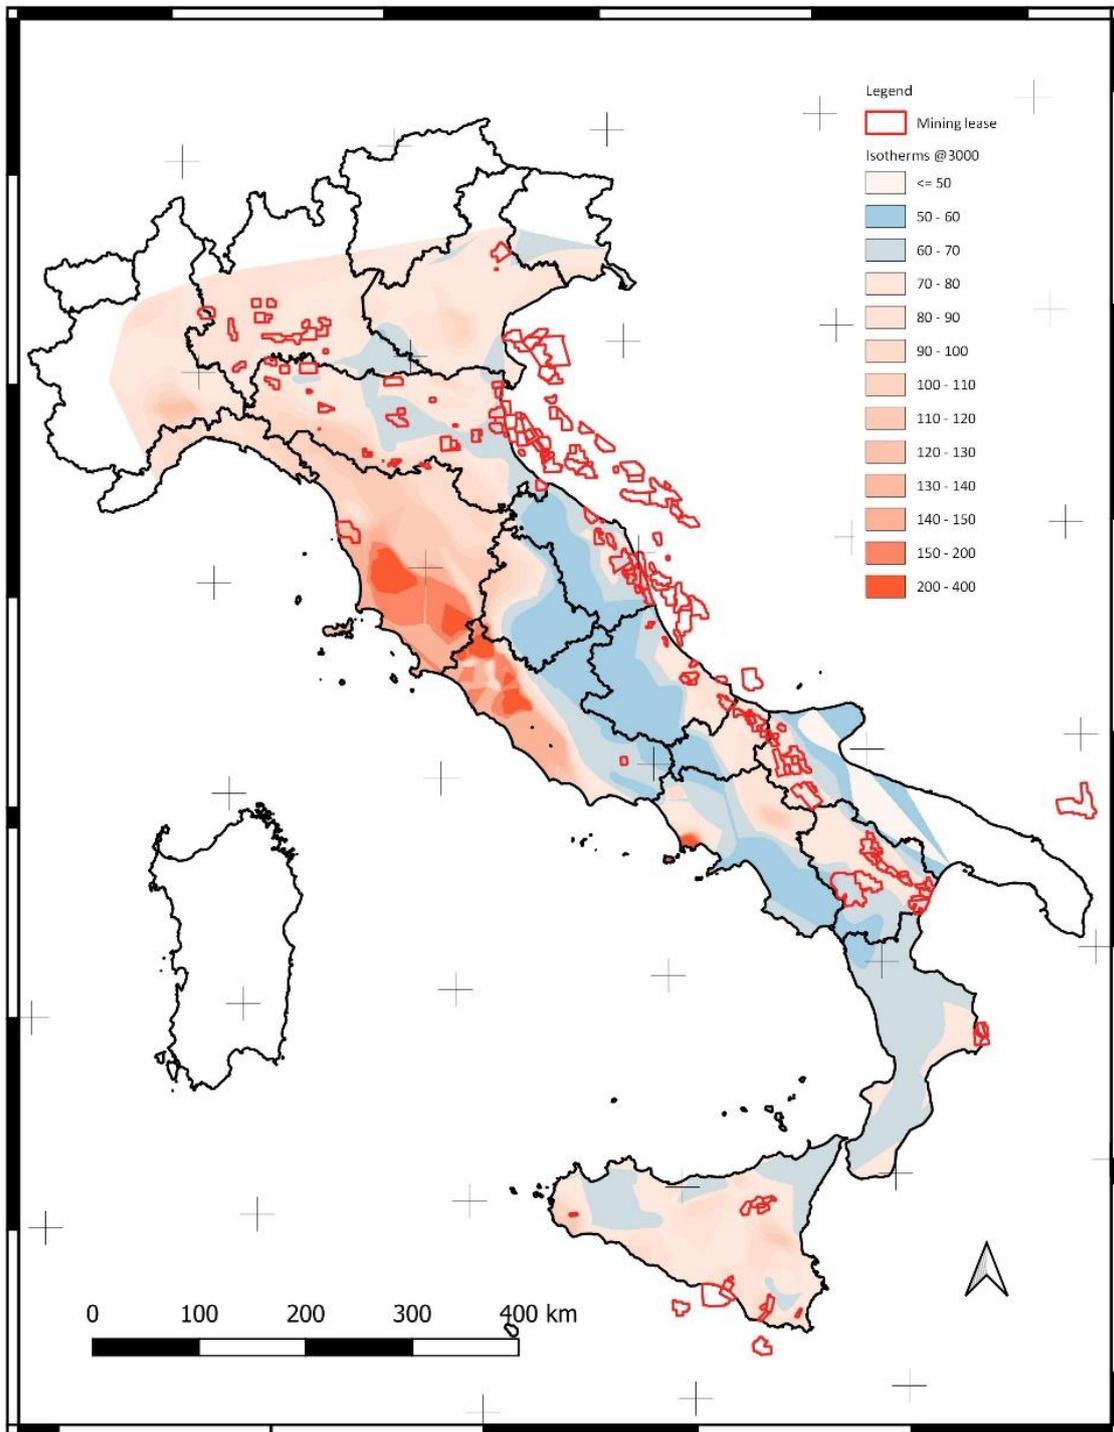


**Figure 3.** Production Concessions with productive or potentially productive wells overlaid on the map with estimated temperature at -3000 m below ground level (after 45).

#### 4. Case Studies

A few representative case studies have been selected for which the available data allows a more detailed analysis. These case studies are the Villafortuna-Trecate and Gaggiano fields in Northern Italy (Middle Triassic petroleum system in thrust belt in Northern Italy), the Irminio field (Late Triassic–Early Jurassic petroleum system in the Hyblean foreland domain in Sicily).

##### 4.1. Villafortuna-Trecate

Villafortuna-Trecate is a field located in the Piemonte region, between the municipalities of Trecate, Romentino and Galliate (Figure 4). The larger part of the wells is near Galliate and Romentino. A cascade plant system composed by an ORC power plant, a district heating and an aquaculture plant is proposed. One system will serve the municipality of Galliate and a second one the Romentino. For the municipalities of Galliate and Romentino there are respectively six wells and three wells available. The produced water, after the use, will be sent to existing reinjection wells.

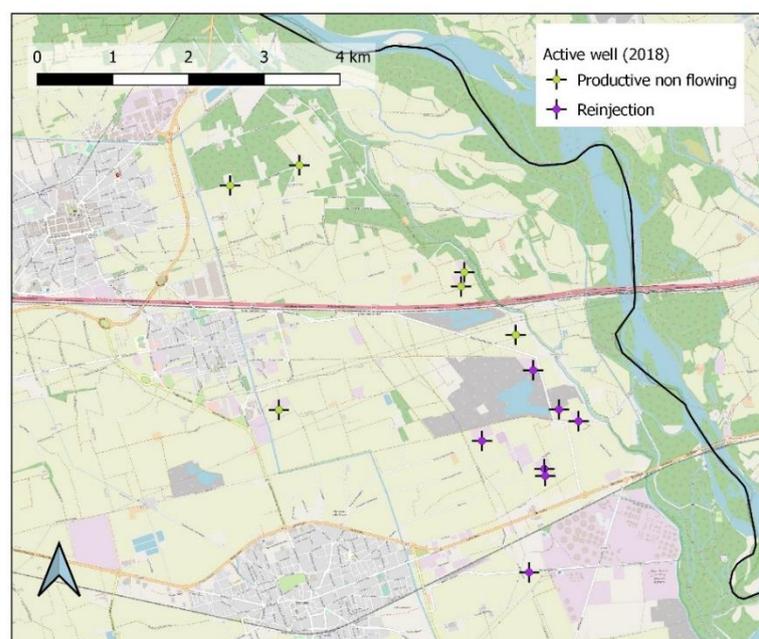

**Figure 4.** The Villafortuna-Trecate field. Wells and Municipalities.

From literature data and based on previous analysis on productive well potential [14], the single well can produce a flow rate of 100 kg/s of hot water having a wellhead brine temperature of 130 °C.

The geothermal fluid will be supplied first to the ORC plant. A thermodynamic analysis of the binary plant, the working fluid selection (isobutane), the sizing of the condenser and the cooling tower is included. To evaluate the number of supplied consumers, a precautionary consumption per capita of 1400 kWh per year is assumed.

From the pre-heater of the ORC plant, the geothermal fluid at a temperature of 84 °C is feed to the district heating (DH) plant. Assuming a heating request of 2 kW per person, the number of inhabitants served was evaluated. The geothermal brine exits from the heat exchanger of the DH plants at the temperature of 50 °C, suitable for the aquaculture applications.

For aquaculture plant, the selected species are shrimps, which need a constant water temperature of 35 °C. Indoor ponds constitute the plant. The annual heat requirement supplied by the geothermal energy includes the heat loss from convection, radiation and evaporation. The evaluation assumes the mean values for air properties air temperature of 20 °C, a relative humidity of 30% and a saturation pressure of 0.007 bar.

Table 2 and 3 illustrate the basic data of plants and economic pre-feasibility.

The results indicate that the proposed power plants, whose size guarantees a surplus of energy to be sold, can supply the yearly electrical demand of Galliate and Romentino municipalities. The cost of the power plant has been obtained considering a mean value of 2000 €/kW. An energy price of 0.06 €/kWh and a working time of 7500 h have been used to evaluate the annual revenues. The estimated annual revenues ensure the recovery of the investment in 4.5 years for the power plant of Galliate and in 5 years for the power plant of Romentino.

**Table 2.** Galliate cascade plant system.

	<b>Power Plant</b>	<b>DH Plant</b>	<b>Aquaculture Plant</b>
Inhabitants/Pond area	15,700		4500 m <sup>2</sup>
Power (MW)	6	22.5	-
Energy produced (MWh)	45,000		-
Supplied consumers	32,143	11,268	-
Plant cost (M€)	12	40.5	0.697
Revenues per year (M€)	1.7	5.25	0.14
Payback time (year)	4.5	7.7	4.9

**Table 3.** Romentino power plant.

	<b>Power Plant</b>	<b>DH Plant</b>	<b>Aquaculture Plant</b>
Inhabitants/Pond area	5635		2800 m <sup>2</sup>
Power (MW)	3	11.2	-
Energy produced (MWh)	22,500		-
Supplied consumers	16,071	5635	-
Plant cost (M€)	6.6	21	0.456
Revenues per year (M€)	1.35	2.7	0.088
Payback time (year)	5	7.75	5.2

The DH plants may guarantee the cover of the thermal need of 71% of inhabitants of Galliate and 100% of inhabitants of Romentino. To estimate the DH plant cost, a value of 1800 €/kW has been used. Considering 3110 working hours per year and a price of thermal energy equal to 0.075 €/kWh, the investment cost is recovered in about 8 years for both of the municipalities.

For the economic evaluation of the aquaculture plants, two values have been used for the installation cost, respectively 155 €/m<sup>2</sup> for the plant of Galliate and 163 €/m<sup>2</sup> for the plant of Romentino. Considering a price of 7 €/kg for the shrimps, and a shrimp production of 4.5 kg/m<sup>2</sup> the payback period is about 5 years for both of the plants.

#### 4.2. Gaggiano

The oil field of Gaggiano is located in the southwestern portion of the Province of Milan and belongs to Middle Triassic petroleum system in thrust belt in Northern Italy. The selected wells are located near the municipality of Tainate and Noviglio (Figure 5). The production performance, based on the analogy with the Trecate field, is more conservative with a flow rate of 50 m<sup>3</sup>/h and the wellhead temperature of the water is estimated to be 125 °C. Considering the availability of 2 production wells and 1 injection well, and the agricultural vocation of the territory, the proposed cascade scheme is composed by a DH plant, greenhouse and aquaculture plant.

From the two wells is possible to obtain a thermal power of 6 MW, 2 MW will be used to feed the greenhouses and 4 MW to feed the DH plant. For both of the plants, the outlet temperature of the feeding water is 70 °C: this fluid will be mixed with water at 20 °C to supply the thermal request of an aquaculture system.



**Figure 5.** The Gaggiano field. Wells and Municipalities.

Assuming a heating request of 2 kW per person, the plant may guarantee the cover of the thermal need of 40% of inhabitants of Gaggiano. Using the same hypothesis of the Trecate case study for the plant cost, energy price and a total number of working hours, the recovery time of investment cost is 7.4 years.

For what concern the 6000 m<sup>2</sup> of greenhouses in Gaggiano, the total installation cost is 0.33 M€. Considering as reference cultivation tomatoes, the selling price has been assumed equal to 1.0 €/kg. The annual revenues of 0.09 M€ guarantees that in 3.67 years the investment may be recovered.

Using the same evaluation procedure and the same species previously described for Galliate and Romentino aquaculture plant, the Gaggiano aquaculture plant presents a payback time of 5.1 years. Table 4 illustrates the basic data of plants and economic pre-feasibility.

**Table 4.** Gaggiano power plant.

	DH Plant	Greenhouse Plant	Aquaculture Plant
Inhabitants/Pond area	4584	6000 m <sup>2</sup>	3200 m <sup>2</sup>
Power (MW)	3.92	-	-
Supplied consumers	1960	-	-
Plant cost (M€)	7	0.33	0.515
Revenues per year (M€)	0.95	0.09	0.10
Payback time (year)	7.4	3.7	5.1

#### 4.3. Irminio

The Irminio oil field (Figure 6) is located near the Irminio River between the Municipality of Ragusa and Scicli. The Irminio field belongs to the Late Triassic–Early Jurassic petroleum system in the Hyblean foreland domain in Sicily. There are currently 4 production wells and an oil centre, where oil is separated from natural gas and water, and stored before marketing.

An evaluation of possible use in a greener way of wells has been studied. For the same reason, the oil company installed a cogeneration unit (CHP) with thermal power of 570 kW and electrical production of 360 kW. The proposed solution want to design a roadmap to a conversion of the plant in a green plant, based on the use of produced heat both from wells and CHP, to produce biogas and biomass for biodiesel production.

The flow rate produced by wells at a temperature of 40 °C is sent to a heat exchanger to heat the anaerobic digester. To satisfy the thermal power demand of the digester, a part of the produced heat from the CHP is also supplied. The process temperature is around 35 °C, working with mesophilic bacteria. The digester has been designed based on the population in Scicli (262.000 people) and assumed to have an organic waste production of 130 kg per capita. The residence time chosen is 30 days for the digester and 60 days for the storage tank to obtain good digestion of the biomass. The daily production is 4038 m<sup>3</sup> of biogas. The biogas can feed the CHP unit.

The larger part of the produced hot water from the CHP is used to produce algae. The algae farm is built close to a power plant, the CO<sub>2</sub> produced by the power plant could be utilized as a carbon source for algal growth, and the carbon emissions would be reduced by recycling waste CO<sub>2</sub> from power plants into clean-burning biodiesel. Practically, all the CO<sub>2</sub> produced by the cogenerator will be introduced in the indoor pond to feed the algae. In this way, it is possible to feed 1800 m<sup>2</sup> of ponds for algae cultivation.

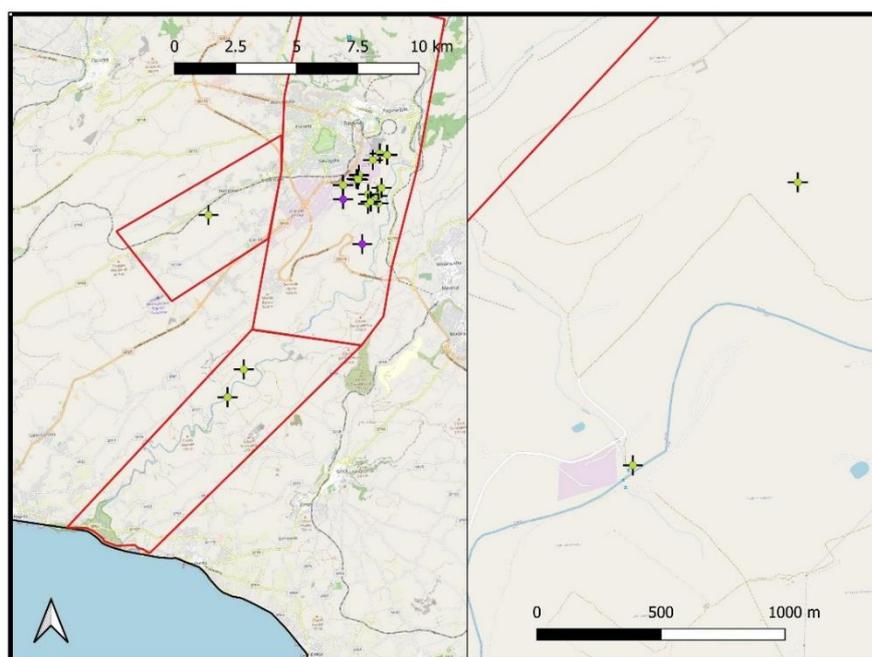


Figure 6. The Irminio field. Wells and Municipalities.

The biogas power plant (Table 5) has a total installation cost of 2.05 M€. Considering the price of electricity equal to 0.06 €/kWh, the annual revenue from electricity is 151.200 €. Taking into account that almost 1000 m<sup>3</sup> of biogas per day are consumed to supply the CHP, the remaining 1.1 Mm<sup>3</sup> of biogas can be sold each year, generating an annual income equal to 0.24 M€. The total annual revenue will be around 0.4 M€ and a simple payback period of 5.2 years is obtained.

In Gela refinery is going to build a plant to distillate algae and produce biodiesel. This opportunity can be assumed to reduce the investment cost to build only the cultivation part, 170 €/m<sup>2</sup>. The total installation cost (Table 6) concerning the 1800 m<sup>2</sup> of indoor ponds is 306 k€. The annually produced biodiesel is 155.000 l and, considering a price of biodiesel equal to 0.452 €/l, the annual income is 70.000 €. A simple payback period of 4.37 years is found. Of course, the cost for transporting algae must be taken into account for a more detailed analysis.

Table 5. Irminio Biogas plant.

Installation cost	2.05 M€
Installed electrical power	360 kW
Installed thermal power	568 kW
Revenue from electricity	151.200 €/y
Gas produced	1.108.761 m <sup>3</sup>

Revenue from gas	243.927 €
Annual revenue	395.127 €
Payback time	5.2 years

**Table 6.** Irminio Biodiesel plant.

Area of the indoor pond	1800 m <sup>2</sup>
Installation plant cost	306.000 €
Biodiesel produced	155.000 l/y
Annual revenue from biodiesel	70.060 €
Payback time	4.3 years

## 5. Discussion and Conclusions

The adopted selection method identifies 42 fields: 23 fields deeper than 3000 m with an expected temperature higher than 70 °C; 9 fields with a depth between 2000 and 3000 m and a temperature higher than 70 °C; 10 fields deeper than 2000 m with a temperature higher than 60 °C. However, it should be noted that due the adopted simplified approach the estimated number of fields can result slightly different where the actual temperature measurements could be taken into consideration. As a matter of fact, one of the main issue to develop a systematic and detailed analysis is the lack of data, which are often covered by the industrial secret.

Three case studies have been investigated in detail to identify a second life for the hydrocarbons wells: Villafortuna-Trecate, Gaggiano, and Irminio, having in total 18 wells, 13 of which, are production wells and the remaining 5 are injection wells. Here below are listed the achievable results of the proposed reuse solutions:

- generation of 9 MW of electrical power.
- heating supply for 18,862 people thanks to DH.
- heating supply of 10,500 m<sup>2</sup> of enclosed ponds.
- heating supply for 6000 m<sup>2</sup> of Greenhouse.
- disposal of 47,160 tons of organic waste to produce 4037.7 m<sup>3</sup>/day of biogas.
- cultivation of algae for the production of 150,000 L/year biodiesel in an 1800 m<sup>2</sup> of indoor ponds.

These results confirm the relevant benefits resulting from the repurposing of existing hydrocarbon well for geothermal applications. It is necessary to emphasize that all these results are achieved without any emission of CO<sub>2</sub> into the atmosphere. The same results also highlight the advantages for the local communities to produce a renewable energy source from the existing infrastructures while the possibility for the companies to reduce the abandonment cost can be a driving force to make available the basic data required to carry out a more detailed analysis over the Italian countryside.

Indeed, considering that in Italy 898 onshore wells with a productive or potentially productive operational status are present, a national project to assess the potential repurposing of oil and gas wells may be a great opportunity for the energy transition to the renewables and the waste heat recovering.

**Conflicts of Interest:** “The authors declare no conflict of interest.”

## References

1. McKenna, J.; Blackwell, D.; Moyes, C.; Patterson, P.D. Geothermal electric power supply possible from Gulf Coast, Midcontinent Oil Field Waters. *Oil Gas J.* **2005**, *103*, 34–40.
2. Bennett, K.; Li, K.; Horne, R. Power generation potential from coproduced fluids in the Los Angeles Basin. In Proceedings of the Thirty-Seventh Workshop on Geothermal Reservoir Engineering, Stanford University, Stanford, CA, USA, 30 January–1 February 2012.
3. Wang, S.; Yan, J.; Li, F.; Hu, J.; Li, K. Exploitation and Utilization of Oilfield Geothermal Resources in China. *Energies* **2016**, *9*, 798, doi:10.3390/en9100798.

4. Wang, K.; Yuan, B.; Jia, G.; Wu, X. A comprehensive review of geothermal energy extraction and utilization in oilfields. *J. Petroleum Sci. Eng.* **2018**, *168*, 465–477.
5. Riney, T.D. Pleasant Bayou Geopressurised Geothermal Reservoir Analysis. *J. Energy Resour. Technol.* **1992**, *114*, 315–322.
6. Barbacki, A.P. The use of abandoned oil and gas wells in Poland for recovering geothermal heat. In Proceedings of the World Geothermal Congress, Kyushu-Tohoku, Japan, 28 May–10 June 2000; pp. 1–5.
7. Zhang, L.; Yuan, J.; Liang, H.; Li, K. Energy from Abandoned Oil and Gas Reservoirs. In Proceedings of the Asia Pacific Oil and Gas Conference and Exhibition, Perth, Australia, 20–22 October 2008.
8. Johnson, L.; Walker, E. *Ormat: Low-Temperature Geothermal Power Generation*; The United States Department of Energy: Wyoming, WI, USA, 2010.
9. Nordquist, J.; Johnson, L. Production of Power from the Co-Produced Water of Oil Wells, 3.5 Years of Operation. *GRC Transactions* **2012**, *36*.
10. Limpasurat, A.; Falcone, G.; Teodoriu, C.; Barrufet, A. Unconventional heavy oil exploitation for waste energy recovery. In Proceedings of the SPE Latin American and Caribbean Petroleum Engineer Conference, Lima, Peru, 1–3 December 2010.
11. Sanyal, S.; Bulter, S. Geothermal power capacity for petroleum wells—Some case histories of assessment. In Proceedings of the World Geothermal Congress, Bali, Indonesia, 25–29 April 2010.
12. Li, T.; Zhu, J.; Zhang, W. Cascade utilization of low temperature geothermal water in oilfield combined power generation, gathering heat tracing and oil recovery. *Appl. Thermal Eng.* **2012**, *40*, 27–35.
13. Xin, S.; Liang, H.; Hu, B.; Li, K. Electrical power generation from low temperature co-produced geothermal resources at Huabei Oilfield. In Proceedings of the 37-th Workshop on Geothermal Reservoir Engineering, Stanford, CA, USA, 30 January–1 February 2012.
14. Alimonti, C.; Gnoni, A. Harnessing the fluids heat to improve mature oil field: The Villafortuna–Trecate case study. *J. Petroleum Sci. Eng.* **2015**, *125*, 256–262.
15. Hu, K.; Zhu, J.; Zhang, W.; Li, X. A case study of an ORC geothermal power demonstration system under partial load conditions in Huabei Oilfield, China. *Energy Procedia* **2017**, *142*, 1327–1332.
16. Yang, Y.; Huo, Y.; Xia, W.; Wang, X.; Zhao, P.; Dai, Y. Construction and preliminary test of a geothermal ORC system using geothermal resource from abandoned oil wells in the Huabei oilfield of China. *Energy* **2017**, *140*, 633–645.
17. Gosnold, W. *Electric Power Generation from Low to Intermediate Temperature Resources Executive*; Technical Report; Univ. of North Dakota: Grand Forks, ND, USA, 2017.
18. Watson, S.M.; Falcone, G.; Westaway, R. Repurposing Hydrocarbon Wells for Geothermal Use in the UK: The Onshore Fields with the Greatest Potential. *Energies* **2020**, *13*, 3541.
19. Auld, A.; Hogg, S.; Berson, A.; Gluyas, J. Power production via North Sea Hot Brines. *Energy* **2014**, *78*, 674–684.
20. Westaway, R. Repurposing of disused shale gas wells for subsurface heat storage: Preliminary analysis concerning UK issues. *Q. J. Eng. Geol. Hydrogeol.* **2016**, *49*, 213–227.
21. Liu, X.; Falcone, G.; Alimonti, C.A. systematic study of harnessing low-temperature geothermal energy from oil and gas reservoirs. *Energy* **2018**, *142*, 346–355.
22. Hirst, C.M.; Gluyas, J.G.; Mathias, S.A. The late field life of the East Midlands Petroleum Province: A new geothermal prospect? *Q. J. Eng. Geol. Hydrogeol.* **2015**, *48*, 104–114.
23. van der Molen, J.; Peters, E.; Jedari-Eyvazi, F.; van Gessel, S.F. Dual hydrocarbon–geothermal energy exploitation: Potential synergy between the production of natural gas and warm water from the subsurface. *Neth. J. Geosci.* **2020**, *98*, e12.
24. Falcone, G.; Liu, X.; Okech, R.R.; Seyidov, F.; Teodoriu, C. Assessment of deep geothermal energy exploitation methods: The need for novel single-well solutions. *Energy* **2018**, *160*, 54–63.
25. Westaway, R. Deep Geothermal SingleWell heat production: Critical appraisal under UK conditions. *Q. J. Eng. Geol. Hydrogeol.* **2018**, *51*, 424–449.
26. Trumpy, E.; Manzella, A. Geothopica and the interactive analysis and visualization of the updated Italian National Geothermal Database. *Int. J. Appl. Earth Obs. Geoinf.* **2017**, *54*, 28–37.
27. Pieri, M.; Mattavelli, L. Geologic framework of Italian petroleum resources. *AAPG Bull.* **1986**, *70*, 103–130.
28. Mattavelli, L.; Novelli, L. Geochemistry and habitat of oils in Italy. *Am. Assoc. Petroleum Geol. Bull.* **1990**, *74*, 1623–1639.

29. Mattavelli, L.; Novelli, L.; Anelli, L. Occurrence of hydrocarbons in the Adriatic Basin. *Eur. Assoc. Petroleum Geosci.* **1991**, *1*, 369–380.
30. Mattavelli, L.; Pieri, M.; Groppi, G. Petroleum exploration in Italy—A review. *Marine Petroleum Geol.* **1993**, *10*, 410–425.
31. Anelli, L.; Mattavelli, L.; Pieri, M. Structural-stratigraphic evolution of Italy and its petroleum systems, in Ziegler, P.A. & Horvath, F., eds., *Peri-Tethys Memoir 2: Structure and Prospects of Alpine Basins and Forelands. Mém. Mus. Natn. Hist. Nat.* **1996**, *170*, 455–483.
32. Pieri, M. Italian petroleum geology. In *Anatomy of an Orogen: The Apennines and Adjacent Mediterranean Basins*; Vai, G.B., Martini, I.P., Eds.; Springer: Amsterdam, The Netherlands, 2001; pp. 533–550.
33. Casero, P. Structural setting of petroleum exploration plays in Italy. *Spec. Vol. Ital. Geol. Soc. IGC 32 Florence 2004*, 189–199.
34. Bertello, F.; Fantoni, R.; Franciosi, R.; Gatti, V.; Ghielmi, M.; Pugliese, A. From thrust-and-fold belt to foreland: Hydrocarbon occurrences in Italy. In *Petroleum Geology: From Mature Basins to New Frontiers, Proceedings of the 7th Petroleum Geology Conference*; Geological Society of London: London, UK, 2010; pp. 113–126, doi:10.1144/0070113.
35. Cazzini, F.; Zotto, O.D.; Fantoni, R.; Ghielmi, M.; Ronchi, P.; Scotti, P. Oil and gas in the Adriatic foreland, Italy. *J. Petroleum Geol.* **2015**, *38*, 255–279.
36. Zappaterra, E. Source-rock distribution model of the Periadriatic Region. *AAPG Bull.* **1994**, *78*, 333–354.
37. Ziegler, P.A.; Roure, F. Petroleum systems of Alpine-Mediterranean fold belts and basins. In *The Mediterranean Basins: Tertiary Extension within the Alpine Orogen*; Durand, B., Jolivet, L., Horvath, E., Sèranne, M., Eds.; Geological Society: London, UK, 1999; pp. 517–540.
38. Jenkyns, H.C. Geochemistry of oceanic anoxic events. *Geochem. Geophys. Geosyst.* **2010**, *11*, Q03004, doi:10.1029/2009GC002788.
39. Magoon, L.B.; Dow, W.G. The petroleum system. In *The Petroleum System—From Source to Trap*; AAPG: Tulsa, OK, USA, 1994; pp. 3–24.
40. UNMIG-MISE (2019) - National Mining Office for hydrocarbon and georesources of the Ministry for Economic Development. Available online: <https://unmig.mise.gov.it/index.php/it/dati/ricerca-e-coltivazione-di-idrocarburi> (accessed on 26 February 2020).
41. ViDEPI Project (2019). Visibility of petroleum exploration data in Italy. Ministry for Economic Development DGRME - Italian Geological Society - Assomineraria. Available online: <http://www.videpi.com/videpi/videpi.asp> (accessed on 26 February 2020).
42. Schlumberger. *Well Evaluation Conference*; WEC: Milan, Italy, 1987.
43. Sella, M.; Turci, C.; Riva, A. Sintesi geopetrolifera della Fossa Bradanica (avanfossa della catena appenninica meridionale). *Memorie Società Geologica Italiana* **1988**, *41*, 87–107.
44. HIS Energy Group. Italy, E&P current licensing status. Map scale 1:1.250.000. In *Proceedings of the 64th EAGE Conference*, Florence, Italy, 27–30 May 2002.
45. Cataldi, R.; Mongelli, F.; Squarci, P.; Taffi, L.; Zito, G.; Calore, C. Geothermal ranking of Italian territory. *Geothermics* **1995**, *1*, 115–129.



© 2020 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).