

Proceeding Paper

Eco-Hydrological Modelling of a Highly Managed Mediterranean Basin Using the SWAT+ Model: A Preliminary Approach [†]

Giuseppe Pulighe * and Flavio Lupia

CREA—Research Centre for Agricultural Policies and Bioeconomy, Via Barberini 36, 00187 Rome, Italy; giuseppe.pulighe@crea.gov.it

* Correspondence: giuseppe.pulighe@crea.gov.it; Tel.: +39-0647856814.

[†] Presented at the 7th International Electronic Conference on Water Sciences, 15–30 March 2023; Available online: <https://ecws-7.sciforum.net>.

Abstract: Highly managed Mediterranean river basins are facing considerable environmental management challenges. Water resource managers are increasingly concerned about the allocation of limited water resources, environmental quality concerns and planning under present and future climatic change and uncertainty. We implemented a watershed-scale eco-hydrological model on the Cervaro river basin (Southern Italy) using the Soil and Water Assessment Tool (SWAT+) model at daily timestep from 1990 to 2019. A high-precision land use map derived from the Integrated Administration and Control System (IACS)/Land Parcel Identification System (LPIS) was used to grasp detailed information regarding landscape patterns. This research has done a preliminary approach for implementing and running the model with these highly detailed datasets. Future efforts should be oriented to fine-tune the baseline scenario considering agricultural management practices and to evaluate model performances for calibration and validation by assessing the goodness-of-fit objective function values.

Keywords: agriculture; watershed modelling; nutrients; simulation; land use/cover; LPIS

1. Introduction

The actual agricultural systems are based on intensive farming techniques that require deep plowing, large usage of nitrogen (N), phosphorus (P), herbicides and pesticides, energy inputs, and land [1]. Leaching losses of sediments, nutrients, and chemicals from agricultural fields can lead to eutrophication of water and soil, deterioration of agroecological systems, and loss of ecosystem services. Agricultural production potential and the capacity to provide other ecosystem services in the future are both reduced as a result of pressures on agricultural systems and natural resources [2], endangering the main soil functions (such as filtering and biological habitat) and their preservation [3]. Agricultural systems face several pressing challenges in resolving the apparent conflict between human needs and resource sustainability [4].

The management of the environment is a significant problem in highly managed Mediterranean river basins. Many solutions have been put out for addressing management issues and local environmental effects on agroecological systems. The use of eco-hydrological modelling for ex-ante quantification of nonpoint source pollution and soil erosion in agroecosystems is a useful approach for implementing sustainable agricultural systems [5]. Many studies have found that eco-hydrological models are effective in simulating the intricate interactions of water, nutrients (N and P), contaminants, and vegetation systems in both natural and agricultural ecosystems.

Citation: Pulighe, G.; Lupia, F. Eco-Hydrological Modelling of a Highly Managed Mediterranean Basin Using the SWAT+ Model: A Preliminary Approach. *Environ. Sci. Proc.* **2023**, *4*, x.

<https://doi.org/10.3390/xxxxx>

Academic Editor(s):

Published: 15 March 2023



Copyright: © 2023 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

These models can help researchers and practitioners to better understand and manage these ecosystems, leading to improved crop yields and reduced environmental impact. Additionally, eco-hydrological models can be used to predict the effects of climate change and other disturbances on agricultural ecosystems, allowing for more effective planning and adaptation. One of the models that are most frequently utilized is the Soil Water Assessment Tool (SWAT) [6]. Examples include streamflow and nutrient loadings [7], modelling of soil erosion [8], best management practices for reducing fertilizer application [9], and climate change studies [10].

This paper focuses on the application of the SWAT+ model in a Mediterranean river basin to evaluate the influence of anthropogenic management on water balance components, nutrients, and sediment loads. The model employs a high-precision land use map produced from the administrative geodata of the Italian Integrated Administration and Control System (IACS)/Land Parcel Identification System (LPIS) used for monitoring the Common Agricultural Policy (CAP) subsidies. High-resolution land use data gain precise information on landscape patterns and allow to better represent the hydrological cycle. The model performances were assessed by comparing simulated and observed streamflow data and calculating goodness-of-fit objective function. Preliminary findings show that the model reproduces the water balance in the watershed well. Future work will be oriented to analyze the effects of alternative management practices on water quality, sediment loads and soil erosion.

2. Materials and Methods

2.1. Study Area

This study was carried out in the Cervaro river basin, which is located in Apulia Region (Southern Italy) between $41^{\circ}07'–41^{\circ}32'$ N latitude and $15^{\circ}06'–15^{\circ}54'$ W longitude (Figure 1). The Cervaro basin has an area of 841 km² and ranges in elevation from 0 to 1100 m on the southern side of the Daunia mountains. The river system consists of the main river course and various major and secondary-order tributaries. The climatic regime is Mediterranean with a bimodal pattern of precipitation distribution with rainy winters and hot summers.

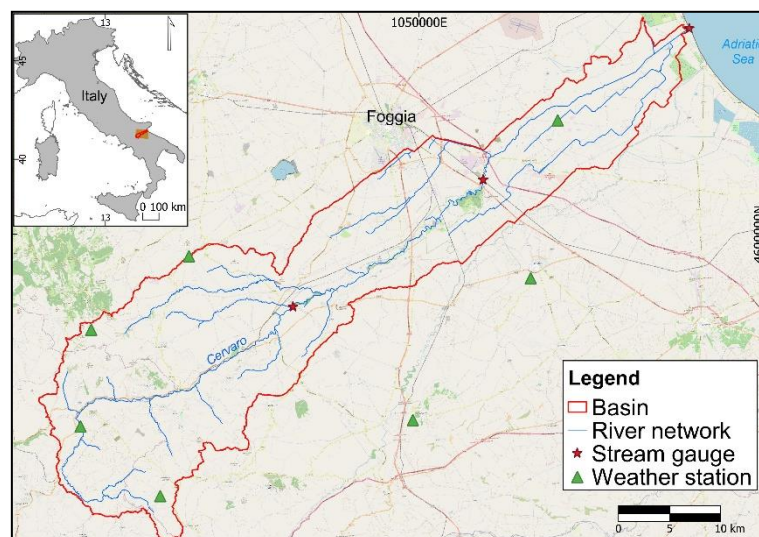


Figure 1. Location of the study area.

2.2. SWAT+ Model Setup

SWAT is a semi-distributed eco-hydrological model that segmented a watershed and its sub-watersheds into homogenous geographical units known as Hydrologic Response Units (HRUs), each of which had a distinct combination of land use, soil, and slope [6].

The HRUs were used to determine the soil water balance. HRUs represent the minimum computational unit within which the soil water balance is determined. In this study was used the new SWAT+ model restructured version that is more efficient and flexible in terms of model construction and configuration.

2.2. Dataset and Model Setup

The SWAT+ model requires the following geospatial data for the implementation (Table 1): Land use/cover data, soil data, Digital Elevation Model (DEM), streamflow data and climate data. In the first step, the DEM was used to delineate the basin and create sub-basin boundaries, while in the second step HRUs were created in conjunction with land use and soil data. In the third step, climate data for the period 1990–2019 were used to set up and run the model as the baseline scenario.

For land use data, we specifically developed a detailed land use map for the study area with 57 thematic classes from IACS s the Land Parcel Identification System (LPIS) conflation [11,12]. More than 70% of the area is devoted to agricultural uses. The SWAT+ model (rev. 60.5.4 – SWAT+ Editor 2.1) was implemented using a QGIS interface and run at daily timestep from first January 1990 to 31 December 2019 considering 4-year warm-up. The study area was discretized into 7345 HRUs. The Penman-Monteith method was used to calculate potential evapotranspiration.

Table 1. Data sources used to implement the SWAT+ model.

Data	Resolution—Scale	Description	Source
Land use	10 m	57 land use types	[12]
Soil data	10 m	16 soil units	[13]
DEM	10 m	elevation data	[13]
Streamflow	Daily (m ³ /s); 1990–2012	runoff at gauge stations	[14]
Climate data	Daily; 1990–2019	temperature, rainfall	[14]

3. Results

The average annual values of the water balance for the whole simulation period are depicted in Figure 2, while monthly water balance components are reported in Table 2. Interannual variability shows that precipitations are concentrated in winter months, while in summer months the average precipitation remains quite stable due to the influence of the gauge stations in the Daunia mountains which have a maximum of 1000 m altitude.

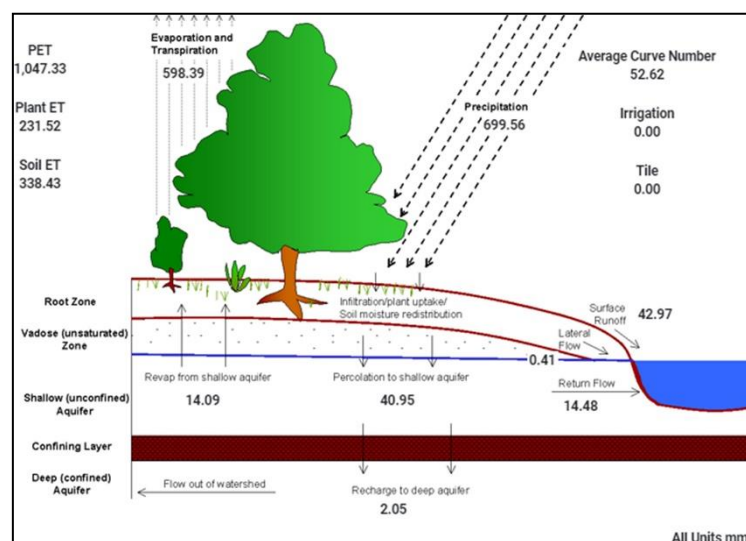


Figure 2. Schematic representation of water balance average annual values. All units in mm.

The results showed that evapotranspiration is the predominant water balance component, with 598.39 mm year⁻¹, accounting for approximately 85.5% of the annual precipitation (699.5 mm), surface runoff 42.97 mm year⁻¹ (representing about 6.1% of the annual precipitation) and water yield (water discharged in the channels) 43.4 mm year⁻¹. Potential evapotranspiration component is equal to 1,047.33 mm year⁻¹, while the average precipitation is equal to 699.5 mm year⁻¹. The average annual outflow for the whole simulation period is 0.44 m³ s⁻¹, in line with the values registered for conterminous river basins in the Apulia region [15], confirming the overall reliability of the model.

Table 2. Water balance average monthly values ¹.

Month	Precipitation	Runoff	Lateralflow	Water Yield	ET	PET
January	74.1	9.5	9.3	9.5	8.9	9.3
February	59.3	7	25.4	7.0	23.7	25.4
March	67.4	7.2	62.9	7.3	58.3	62.9
April	63.9	2.8	104.6	2.8	95.3	104.6
May	51.7	1.6	151.2	1.6	118.2	151.2
June	43.8	1.5	172.9	1.5	92.7	172.9
July	35.9	1.1	185.2	1.2	58.8	185.2
August	34.3	0.9	158.5	1.0	38.8	158.5
September	58.0	1.7	102.7	1.8	49.0	102.7
October	66.5	2.4	56.0	2.4	36.2	56.0
November	75.5	2.7	17.8	2.8	15.6	17.8
December	71.8	4.5	5.2	4.6	5.1	5.2

¹ All values in mm.

4. Conclusions

This study presented a preliminary quantitative assessment of the eco-hydrological processes using the SWAT+ model in a highly managed Mediterranean watershed. Based on the results of the preliminary model setting-up of developing a baseline scenario in the Cervaro river basin, (Southern Italy), can be summarized as follows:

- The river basin has a vast and heterogeneous agricultural plan with 57 land use types that can strongly influence the water balance with management practices such as planting, irrigation and fertilization;
- Overall, the SWAT+ model performed well and is able to represent adequately and reasonably the main elements of the hydrological budget; future work should be oriented toward calibrating and validating the model to adjust model parameters toward more realistic model results;
- The use of detailed land use/cover maps as the one used in this study can improve the representation of hydrological models in complex agricultural systems, enabling in the future the implementation of best management practices.

Author Contributions: Conceptualization, G.P. and F.L.; methodology, G.P. and F.L.; software, G.P. and F.L.; G.P. and F.L.; formal analysis, G.P. and F.L.; data curation, G.P. and F.L.; writing—original draft preparation, G.P. and F.L.; visualization, G.P. and F.L. All authors have read and agreed to the published version of the manuscript.

Funding: The work was carried out in the framework of the project "Open LOD platform based on HPC capabilities for Integrated Administration of Common Agriculture Policy (Open IACS)" co-financed by the Connecting Europe Facility of the European Union by the Innovation and Networks Executive Agency Agreement No. INEA/CEF/ICT/A2018/1815914.

Data Availability Statement: Regione Puglia Annali e Dati Idrologici Elaborati—Regione Puglia. Available online: <https://protezionecivile.puglia.it/annali-e-dati-idrologici-elaborati> (accessed on 10 October 2022).

Acknowledgments: We would like to thank Diego Gallinelli and Pietro Macedoni for their contribution to the creation of the land use map.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. United Nations. *Department of Economics and Social Affairs, Population Division. World Population Prospects 2019: Highlights. ST/ESA/SER.A/423*; United Nations: New York, NY, USA, 2019.
2. Tóth, G.; Montanarella, L.; Rusco, E. *Threats to Soil Quality in Europe*; European Commission, Joint Research Centre: Ispra, Italy, 2008; ISBN 9789279095290.
3. Sonderegger, T.; Pfister, S. Global Assessment of Agricultural Productivity Losses from Soil Compaction and Water Erosion. *Environ. Sci. Technol.* **2021**, *55*, 12162–12171, doi:10.1021/acs.est.1c03774.
4. Springmann, M.; Clark, M.; Mason-D’Croz, D.; Wiebe, K.; Bodirsky, B.L.; Lassalle, L.; de Vries, W.; Vermeulen, S.J.; Herrero, M.; Carlson, K.M.; et al. Options for Keeping the Food System within Environmental Limits. *Nature* **2018**, *562*, 519–525, doi:10.1038/s41586-018-0594-0.
5. Saiz-Rubio, V.; Rovira-Más, F. From Smart Farming towards Agriculture 5.0: A Review on Crop Data Management. *Agronomy* **2020**, *10*, 207, doi:10.3390/agronomy10020207.
6. Arnold, J.R.; Kiniry, R.; Srinivasan, R.; Williams, J.R.; Haney, E.B.; Neitsch, S.L. *Soil & Water Assessment Tool—Input/Output Documentation Version 2012*; TR-439; Texas Water Resources Institute: College Station, TX, USA, 2012;
7. Pulighe, G.; Bonati, G.; Colangeli, M.; Traverso, L.; Lupia, F.; Altobelli, F.; Dalla Marta, A.; Napoli, M. Predicting Streamflow and Nutrient Loadings in a Semi-Arid Mediterranean Watershed with Ephemeral Streams Using the SWAT Model. *Agronomy* **2019**, *10*, 2, doi:10.3390/agronomy10010002.
8. Himanshu, S.K.; Pandey, A.; Yadav, B.; Gupta, A. Evaluation of Best Management Practices for Sediment and Nutrient Loss Control Using SWAT Model. *Soil Tillage Res.* **2019**, *192*, 42–58, doi:10.1016/j.still.2019.04.016.
9. Wang, W.; Xie, Y.; Bi, M.; Wang, X.; Lu, Y.; Fan, Z. Effects of Best Management Practices on Nitrogen Load Reduction in Tea Fields with Different Slope Gradients Using the SWAT Model. *Appl. Geogr.* **2018**, *90*, 200–213, doi:10.1016/j.apgeog.2017.08.020.
10. Pulighe, G.; Lupia, F.; Chen, H.; Yin, H. Modeling Climate Change Impacts on Water Balance of a Mediterranean Watershed Using SWAT+. *Hydrology* **2021**, *8*, 157, doi:10.3390/hydrology8040157.
11. Lupia, F.; Rizzi, D.; Gallinelli, D.; Macedoni, P.; Pierangeli, F.; Carfi, S.; Pulighe, G. High Resolution Land Use Map for Eco-Hydrological Modelling from IACS/LPIS Geodata Conflation. *Abstr. ICA* **2021**, *3*, 1–2, doi:10.5194/ica-abs-3-188-2021.
12. Open IACS Project.
13. Regione Puglia Sistema Informativo Territoriale Regione Puglia.
14. Regione Puglia Annali e Dati Idrologici Elaborati - Regione Puglia.
15. D’Ambrosio, E.; De Girolamo, A.M.; Barca, E.; Ielpo, P.; Rulli, M.C. Characterising the Hydrological Regime of an Ungauged Temporary River System: A Case Study. *Environ. Sci. Pollut. Res.* **2017**, *24*, 13950–13966, doi:10.1007/s11356-016-7169-0.

Disclaimer/Publisher’s Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.